

Table of Specifications

Midi 4-Pole Contactors



Frame size			
Type	Screw clamp terminal		
Number of poles			
Rated operational voltage (Ue)			
Rated insulation voltage (Ui)			
Rated frequency			
Rated impulse withstand voltage, Uimp			
Maximum operating rate in operating cycles per hour(AC1)			
Durability	Mechanical		
	Electrical		
Current and Power	AC-1	Thermal current	A
		200/240V	kW
		380/400V	kW
			A
		500/550V	kW
			A
UL rating (50/60Hz)		690V	kW
			A
		Continuous current	A
		Single	110~120V HP
		Phase	220~240V HP
			200~208V HP
Size and weight		Three	220~240V HP
		Phase	440~480V HP
			550~600V HP
		NEMA Size	
		AC	Weight kg
		Control	Size(W × H × D) mm
Auxiliary(standard)		DC	Weight kg
		Control	Size(W × H × D) mm
Auxiliary		Side Mount	
		Front Mount	

18AF		
CC9/4	CC12/4	CC18/4
●		
4pole		
690V		
690V		
50/60Hz		
6kV		
1800 operations per hour		
15 mil. Operations		
0.5 mil. Operations	0.8 mil. Operations	
25	25	40
9	9	15
25	25	40
17	17	27
25	25	40
21	21	35
25	25	40
27	27	44
25	25	40
25	25	32
0.5	0.75	1
1.5	2	3
2	3	5
3	5	7.5
5	7.5	10
7.5	10	15
00	0	0
0.33		
45 × 73.5 × 79		
0.5		
45 × 73.5 × 110.7		
-		
GUA1		
GUA2, GUA4		

Table of Specifications



22AF	
CC22/4	
●	
4pole	
690V	
690V	
50/60Hz	
6kV	
1800 operations	
15 mil. Operations	
1 mil. Operations	
40	
15	
40	
27	
40	
35	
40	
44	
40	
32	
2	
3	
7.5	
7.5	
10	
15	
1	
0.4	
47.2 × 80 × 86.8	
0.5	
47.2 × 80 × 113.2	
-	
GUA1	
GUA2, GUA4	

40AF	
CC32/4	CC40/4
●	
4pole	
690V	
690V	
50/60Hz	
6kV	
1800 operations per hour	
15 mil. Operations	
1 mil. Operations	
50	60
18	22
50	60
35	42
50	60
43	52
50	60
55	66
50	60
45	50
2	3
5	5
7.5	10
10	10
20	25
20	25
1	1
0.59	
59 × 83.5 × 94.5	
0.7	
59 × 83.5 × 121	
-	
GUA1	
GUA2, GUA4	

85AF			
CC50/4	CC65/4	CC75/4	CC85/4
●			
4pole			
690V			
1000V			
50/60Hz			
8kV			
1800 operations per hour			
12 mil. Operations			
1 mil. Operations			
80	100	110	135
30	37	41	51
80	100	110	135
56	70	76	95
80	100	110	135
70	88	97	120
80	100	110	135
88	110	120	150
80	100	110	135
70	80	90	100
3	5	5	7.5
7.5	10	15	15
10	15	20	25
15	20	25	30
30	40	50	50
30	40	50	50
2	2	2	3
1.2			
91 × 123.5 × 117.8			
1.29			
91 × 123.5 × 117.8			
-			
GUA1			
GUA2, GUA4			

Table of Specifications

Power 4-Pole Contactors



Frame size			
Type		Screw clamp terminal	
Number of poles			
Rated operational voltage (Ue)			
Rated insulation voltage (Ui)			
Rated frequency			
Rated impulse withstand voltage, Uimp			
Maximum operating rate in operating cycles per hour(AC1)			
Durability		Mechanical	
		Electrical	
Current and Power	AC-1	Thermal current	A
		200/240V	kW
		380/400V	kW
			A
		500/550V	kW
			A
	690V	kW	
		A	
UL rating (50/60Hz)	Continuous current		A
	Single Phase	110~120V	HP
		220~240V	HP
		200~208V	HP
	Three Phase	220~240V	HP
		440~480V	HP
		550~600V	HP
	NEMA Size		
Size and weight		AC Weight	kg
		Control Size(W × H × D)	mm
		DC Weight	kg
		Control Size(W × H × D)	mm
Auxiliary(standard)			
Auxiliary		Side Mount	
		Front Mount	

* - FLA = 722 A, LRA = 5618 A
 ** - FLA = 566 A, LRA = 4495 A

225AF				
CC100/4	CC130/4	CC150/4	CC185/4	CC225/4
●				
4pole				
690V				
1000V				
50/60Hz				
8kV				
1200 operations per hour				
15 mil. Operations				
0.8 mil. Operations				
160	165	250	300	330
57	60	76	87	100
150	155	200	230	260
106	110	142	165	185
150	155	200	230	260
132	137	180	205	230
150	155	200	230	260
165	170	225	255	290
150	155	200	230	260
160	160	210	230	275
7.5	10	15	15	15
15	20	25	30	40
30	40	40	60	60
30	40	50	60	75
60	75	100	125	150
60	75	100	125	150
3	3	4	4	4
5.6				
175 × 203 × 185				
2a2b				
AX100				
-				

Table of Specifications



400AF		
CC265/4	CC330/4	CC400/4
●		
4pole		
690V		
1000V		
50/60Hz		
8kV		
1200 operations per hour		
15 mil. Operations		
0.5 mil. Operations		
360	420	500
115	135	160
300	350	420
215	250	300
300	350	420
265	315	375
300	350	420
335	390	470
300	350	420
300	350	450
-	-	-
-	-	-
75	100	125
100	100	150
200	200	300
200	200	300
5	5	5

9.9
206 × 243 × 205

2a2b
AX100
-




800AF		
CC500/4	CC630/4	CC800/4
●		
4pole		
690V		
1000V		
50/60Hz		
8kV		
1200 operations per hour		
12 mil. Operations		
0.5 mil. Operations		
630	750	900
245	255	310
630	660	800
450	470	570
630	660	800
560	590	710
630	660	800
710	740	900
630	660	800
580	660	900
-	-	-
-	-	-
150	200	200
200	250	300
400	500	600 *
400	500	600 **
6	6	7

26.3
346 × 310 × 244

2a2b
AX100
-

Contactors (CC9/4 ~ CC22/4)




CC9/4 ~ CC18/4
AC coil



[mm]




0.3kg

CC9/4 ~ CC18/4
DC coil

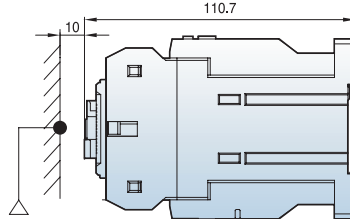




0.45kg

CC22/4
AC coil



0.4kg




CC22/4
DC coil

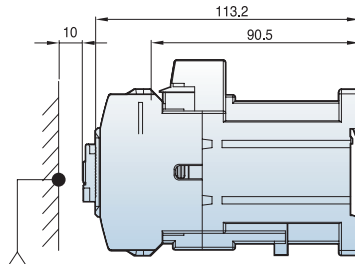

0.5kg




Contactors (CC32/4 ~ CC85/4)

CC32/4 ~ CC40/4
 AC coil






0.59kg

CC32/4 ~ CC40/4
 DC coil

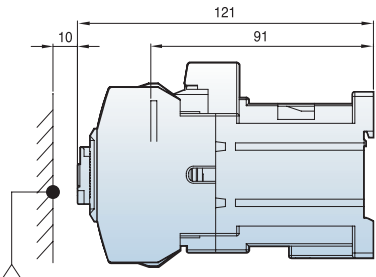




0.7kg

CC50/4 ~ CC85/4
 AC coil

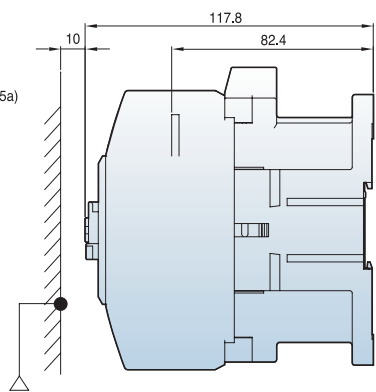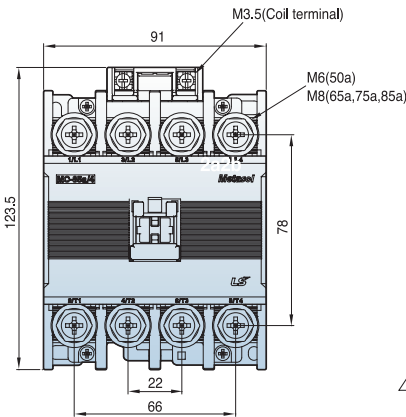

1.2kg



CC50/4 ~ CC85/4
 DC coil

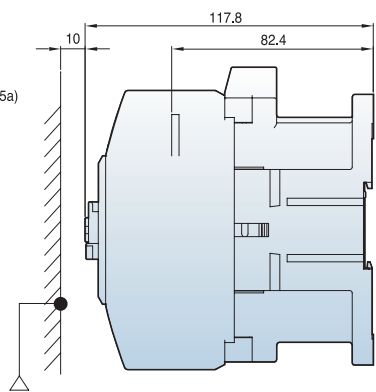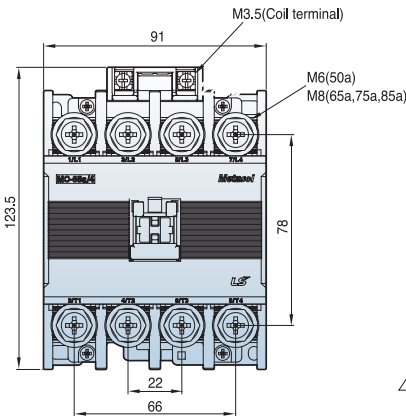

1.29kg



Contactors (CC100/4 ~ CC800/4)

CC100/4 ~ CC225/4

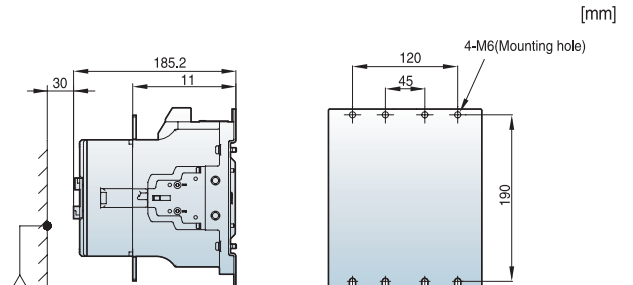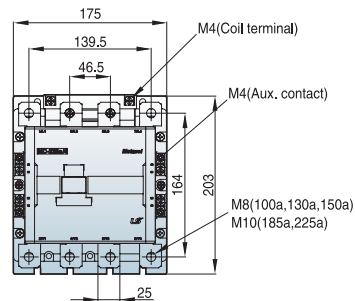



5.6kg

CC265/4 ~ CC400/4

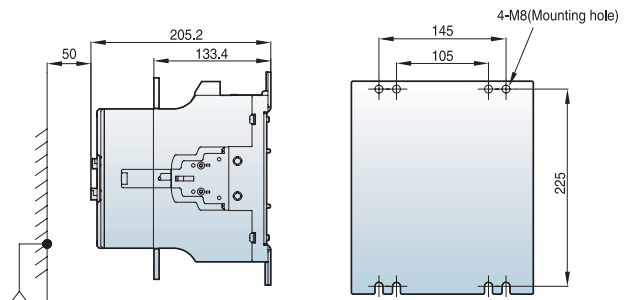

9.9kg

CC500/4 ~ CC800/4

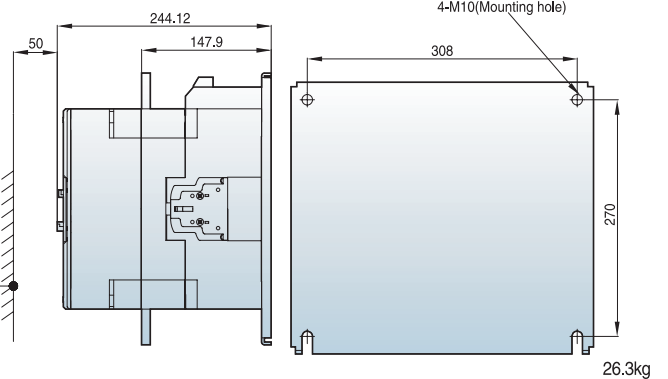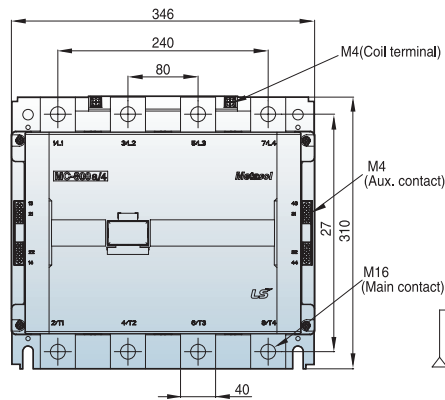

26.3kg

Type Numbering System

Midi-Contactor

CC	9		S	A	120		
Magnetic 3-pole Midi-Contactor	Amperage Size	Type	Terminal Type	Coil Type	Coil Voltage	AC Coil Frequency	Auxiliary Contact s
	9 - 9A 12 - 12A 18 - 18A 22 - 22A 32 - 32A 40 - 40A 50 - 50A 65 - 65A 75 - 75A 85 - 85A 100 - 100A	BLANK - 3-pole /4 - 4-pole	S - Screw L - Lug (>50A)	A - AC type D - DC type	24 - 24V 120 - 120V & 600 - 600V	BLANK - 50/60 Hz 50Hz - 50Hz only 60Hz - 60Hz only	BLANK - standard arrangement NOAUX - no aux. contact (>=32A)

Overload

GT	32		S	0.16A
Bimetallic Midi-Overload	Frame Size	Class	Terminal Type (Must match contactor number)	Setting Ranges (Use upper limit in part)
	32 - 9, 12, 18A 22, 32, 40A 65 - 50, 65A 75 - 75, 85, 100A	BLANK class 10 L - class 20	S - Screw L - Lug (>35A)	0.1 ~ 0.16A 0.16 ~ 0.25A 0.25 ~ 0.4A 0.4 ~ 0.63A 0.63 ~ 1A 1 ~ 1.6A 1.6 ~ 2.5A 2.5 ~ 4A 4 ~ 6A 5 ~ 8A 6 ~ 9A 7 ~ 10A 9 ~ 13A 12 ~ 18A 16 ~ 22A 18 ~ 25A 22 ~ 32A 24 ~ 36A 28 ~ 40A 34 ~ 50A 45 ~ 65A 54 ~ 75A 63 ~ 85A 70 ~ 95A 80 ~ 100A (Setting Range Guide)

CGE	22	3P	22A
Electronic Midi Overload	Frame Size	Protection	Setting Range (Use upper limit in part)
	22 - 9, 12, 18, 22A 40 - 32, 40A 80 - 50, 65, 75, 85A	Direct Mount 22 and 40AF 2P - 2-Pole 3P - 3-Pole 3PR - 3-pole Separate Mount All CGE sizes 2S - 2-Pole 3S - 3-Pole 3SR - 3-Pole	CGE22 0.3 ~ 1.5A 1 ~ 5A 4.4 ~ 22A CGE40 4 ~ 20A 8 ~ 40A CGE80 16 ~ 80A

Tunel Type 22 and 40AF 2T - 2-Pole 3T - 3-Pole 3TR - 3-Pole	GT32 GT65 GT95
---	----------------------

Optional Accessories

Auxiliary contact unit

GUA1

11

Version	Contact composition
GUA1 Side mount	11 1NO+1NC
GUA2 Front mount(2P)	20 2NO
GUA4 Front mount(4P)	02 2NC
	40 4NO
	31 3NO+1NC
	22 2NO+2NC
	13 1NO+3NC
	04 4NC

Surge absorber

GUS11

Composition and voltage
1 Varistor+RC AC/DC 24~48V
2 Varistor+RC AC/DC 100~125V
3 Varistor+RC AC/DC 200~240V
4 Varistor+RC AC 380~440V
5 Varistor+RC AC 24~48V
6 Varistor+RC AC 100~125V
11 Varistor AC 200~240V
12 Varistor DC 24~48V
13 Varistor DC 100~125V
14 Varistor DC 200~220V
22 RC AC 100~125V

(Note) See page 52 for details.

Interlock unit

GUR02

Contact composition

02	2NC
----	-----

Wire kit for Interlocking

GUW32

Frame size

22	22AF
32	32AF
63	63AF
95	95AF

Separate mounting unit (For relay)

GUZ32

Frame size

32	32AF
63	63AF
95	95AF
150	150AF

Remote reset unit (For relay)

GTTR-16

Cable length

16	400
20	500
24	600

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Carlo Gavazzi:

[CC150/4SAD24](#) [CC18/4SA240](#) [CC18/4SA600-60HZ](#) [CC18/4SD24](#) [CC32/4SA110](#) [CC40/4SA480-60HZ](#)
[CC265/4SA500](#) [CC40/4SA600-60HZ](#) [CC65/4SA240](#) [CC85/4SA240](#) [CC12/4SA220](#) [CC150/4SAD200](#) [CC18/4SA24](#)
[CC18/4SA480-60HZ](#) [CC225/4SAD200](#) [CC225/4SAD24](#) [CC40/4SA24](#) [CC50/4SA120](#) [CC65/4SA120](#) [CC85/4SA208-](#)
[60HZ](#) [CC12/4SA110](#) [CC12/4SA208-60HZ](#) [CC75/4SD24](#) [CC85/4SA600-60HZ](#) [CC18/4SA110](#) [CC18/4SA208-60HZ](#)
[CC185/4SA500](#) [CC40/4SA208-60HZ](#) [CC65/4SA220](#) [CC12/4SA120](#) [CC150/4SA500](#) [CC265/4SAD200](#) [CC40/4SD24](#)
[CC65/4SA24](#) [CC75/4SA120](#) [CC800/4SAD100](#) [CC22/4SA480-60HZ](#) [CC22/4SD24](#) [CC32/4SA208-60HZ](#)
[CC32/4SA230](#) [CC330/4SAD200](#) [CC50/4SA240](#) [CC50/4SA480-60HZ](#) [CC630/4SAD100](#) [CC630/4SAD200](#)
[CC75/4SA110](#) [CC9/4SA24](#) [CC100/4SA500](#) [CC22/4SA240GUA211](#) [CC32/4SA480-60HZ](#) [CC32/4SA600-60HZ](#)
[CC32/4SD24](#) [CC9/4SA600-60HZ](#) [CC12/4SA230](#) [CC12/4SA240](#) [CC18/4SA220](#) [CC40/4SA240](#) [CC630/4SA500](#)
[CC65/4SD24](#) [CC75/4SA208-60HZ](#) [CC75/4SA24](#) [CC85/4SA110](#) [CC9/4SA240](#) [CC130/4SAD24](#) [CC185/4SAD24](#)
[CC22/4SA120](#) [CC330/4SA500](#) [CC50/4SA220](#) [CC500/4SAD100](#) [CC800/4SA500](#) [CC85/4SA24](#) [CC9/4SA480-60HZ](#)
[CC12/4SA24](#) [CC12/4SA240GUA1](#) [CC130/4SA500](#) [CC50/4SA24](#) [CC500/4SA500](#) [CC500/4SAD200](#) [CC65/4SA110](#)
[CC65/4SA208-60HZ](#) [CC75/4SA240](#) [CC130/4SAD200](#) [CC185/4SAD200](#) [CC22/4SA208-60HZ](#) [CC22/4SA600-60HZ](#)
[CC225/4SA500](#) [CC50/4SA208-60HZ](#) [CC32/4SA24](#) [CC32/4SD48](#) [CC40/4SA220](#) [CC400/4SAD200](#) [CC75/4SA220](#)
[CC85/4SA120](#) [CC9/4SA220](#) [CC9/4SA208-60HZ](#) [CC12/4SA480-60HZ](#) [CC18/4SA120](#) [CC22/4SA110](#) [CC32/4SA220](#)
[CC22/4SA24](#)