

# Monitoring Relays

## 1-Phase True RMS AC/DC Over or Under Current

### Type DIB71

CARLO GAVAZZI



- TRMS AC/DC over or under current monitoring relay
- Current measuring through internal shunt
- Selection of measuring range by DIP-switches
- Measuring ranges from 0.1 mA to 5 A AC/DC
- Adjustable current on relative scale
- Adjustable hysteresis on relative scale
- Adjustable delay function (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 5 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022
- 35.5 mm DIN-rail housing
- LED indication for relay, alarm and power supply ON
- Galvanically separated power supply

## Product Description

DIB71 is a precise TRMS AC/DC over or under current (selectable by DIP-switch) monitoring relays. Direct measuring or through current transformer. Owing to the built-in latch function, the ON-position of the relay output can be maintained. Inhibit function can be used to avoid relay

operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relay. Through the built-in shunt it is possible to monitor loads up to 5 A AC/DC. 35.5 mm wide housing suitable both for back and front panel mounting.

## Ordering Key

**DIB 71 C B23 5A**

Housing \_\_\_\_\_  
 Function \_\_\_\_\_  
 Type \_\_\_\_\_  
 Item number \_\_\_\_\_  
 Output \_\_\_\_\_  
 Power supply \_\_\_\_\_  
 Measuring range \_\_\_\_\_

## Type Selection

Mounting	Output	Measuring range	Supply: 24/48 VAC	Supply: 115/230 VAC
DIN-rail	SPDT	0.1 to 5 mA AC/DC	DIB 71 C B48 5mA	DIB 71 C B23 5mA
DIN-rail	SPDT	1 to 50 mA AC/DC	DIB 71 C B48 50mA	DIB 71 C B23 50mA
DIN-rail	SPDT	10 to 500 mA AC/DC	DIB 71 C B48 500mA	DIB 71 C B23 500mA
DIN-rail	SPDT	0.1 to 5 A AC/DC	DIB 71 C B48 5A	DIB 71 C B23 5A

## Input Specifications

Input (current level)	Terminals Y1, Y2		Measuring ranges (cont.)			
Measuring ranges			Standard CT (examples)		AAC <sub>rms</sub>	Max. curr.
Direct			TADK2	50 A/5 A	5 to 50 A	60 A
Selectable by DIP-switch			CTD1	150 A/5 A	15 to 150 A	180 A
..5MA: 0.1 to 1 mA AC/DC	100 Ω	40 mA	CTD4	400 A/5 A	40 to 400 A	480 A
0.2 to 2 mA AC/DC	100 Ω	40 mA	TAD12	1000 A/5 A	100 to 1000 A	1200 A
0.5 to 5 mA AC/DC	100 Ω	40 mA	TACO200	6000 A/5 A	600 to 6000 A	7200 A
Max. current for 1 s		100 mA				
..50MA: 1 to 10 mA AC/DC	10 Ω	120 mA				
2 to 20 mA AC/DC	10 Ω	120 mA				
5 to 50 mA AC/DC	10 Ω	120 mA				
Max. current for 1 s		300 mA				
..500MA:10 to 100 mA AC/DC	1 Ω	700 mA				
20 to 200 mA AC/DC	1 Ω	700 mA				
50 to 500 mA AC/DC	1 Ω	700 mA				
Max. current for 1 s		1.4 A				
..5A: 0.1 to 1 A AC/DC	0.03 Ω	6 A				
0.2 to 2 A AC/DC	0.03 Ω	6 A				
0.5 to 5 A AC/DC	0.03 Ω	6 A				
Max. current for 1 s		15 A				

**Contact input**  
 Disabled  
 Enabled  
 Latch disable

Terminals Z1, Y1  
 > 10 kΩ  
 < 500 Ω  
 > 500 ms

## Output Specifications

<b>Output</b>	SPDT relay
Rated insulation voltage	250 VAC
<b>Contact ratings</b> (AgSnO <sub>2</sub> )	μ
Resistive loads AC 1	5 A @ 250 VAC
DC 12	5 A @ 24 VDC
Small inductive loads AC 15	2.5 A @ 250 VAC
DC 13	2.5 A @ 24 VDC
<b>Mechanical life</b>	≥ 30 x 10 <sup>6</sup> operations
<b>Electrical life</b>	≥ 10 <sup>5</sup> operations (at 5 A, 250 V, cos φ = 1)
<b>Operating frequency</b>	≤ 7200 operations/h
<b>Dielectric strength</b>	
Dielectric voltage	2 kVAC (rms)
Rated impulse withstand volt.	4 kV (1.2/50 μs)

## Supply Specifications

<b>Power supply</b>	Overvoltage cat. III (IEC 60664, IEC 60038)
Rated operational voltage through terminals:	
A1, A2 or A3, A2	
B48:	24/48 VAC ± 15%
	45 to 65 Hz, insulated
B23:	115/230 VAC ± 15%
	45 to 65 Hz, insulated
<b>Dielectric voltage</b>	
Supply to input	4 kV (1.2/50 μs)
Supply to output	4 kV (1.2/50 μs)
Input to output	4 kV (1.2/50 μs)
<b>Rated operational power</b>	
AC	3 VA

## General Specifications

<b>Power ON delay</b>	1 s ± 0.5 s or 6 s ± 0.5 s
<b>Reaction time</b>	(input signal variation from -20% to +20% or from +20% to -20% of set value)
Alarm ON delay	< 100 ms
Alarm OFF delay	< 100 ms
<b>Accuracy</b>	(15 min warm-up time)
Temperature drift	± 1000 ppm/°C
Delay ON alarm	± 10% on set value ± 50 ms
Repeatability	± 0.5% on full-scale
<b>Indication for</b>	
Power supply ON	LED, green
Alarm ON	LED, red (flashing 2 Hz during delay time)
Output relay ON	LED, yellow
<b>Environment</b>	(EN 60529)
Degree of protection	IP 20
Pollution degree	3
Operating temperature	
5A	-20 to 50°C, R.H. < 95%
others	-20 to 60°C, R.H. < 95%
Storage temperature	-30 to 80°C, R.H. < 95%
<b>Housing</b>	
Dimensions	35.5 x 81 x 67.2 mm
Material	PA66 or Noryl
<b>Weight</b>	Approx. 150 g
<b>Screw terminals</b>	
Tightening torque	Max. 0.5 Nm acc. to IEC 60947
<b>Product standard</b>	EN 60255-6
<b>Approvals</b>	UL, CSA
<b>CE Marking</b>	L.V. Directive 2006/95/EC EMC Directive 2004/108/EC
EMC	
Immunity	According to EN 60255-26 According to EN 61000-6-2 According to EN 60255-26 According to EN 61000-6-3
Emissions	

## Mode of Operation

DIB71 monitors both AC and DC over or under current through an internal shunt.

### Example 1

(connection between terminals Z1, Y1 - latching function enabled)

The relay operates and latches in operating position when the measured value exceeds (or drops below) the set level for more than the

set delay time. Provided that the current has dropped below (or has exceeded) the set point (see hysteresis setting), the relay releases when the interconnection between terminals Z1, Y1 is interrupted or the power supply is interrupted as well.

The red LED flashes until the delay time has expired or the measured value comes back to a non-alarm value (see hysteresis setting).

### Example 2 (Standard CT)

(no connection between terminals Z1, Y1 - latch function disabled)

The relay operates when the measured value exceeds (or drops below) the set level for more than the set delay time. It releases when the current drops below (or exceeds) the set level (see hysteresis setting) or when power supply is interrupted.

### Note


When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay activation.

## Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 1 and 2 as shown in figure.

Select the desired function setting the DIP switches 3 to 6 as shown in figure.

To access the DIP switches open the plastic cover as shown in figure.

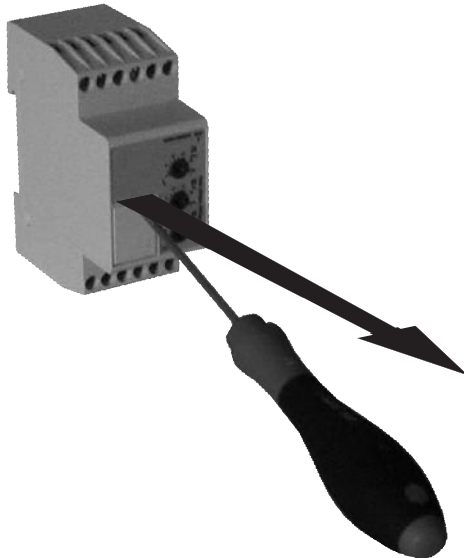

**Selection of level and time delay:**

**Upper knob:**  
Setting of hysteresis on relative scale: 0 to 30% on set value.

**Centre knob:**  
Current level setting on relative scale: 10 to 110% on full scale.

**Lower knob:**  
Setting of delay on alarm time on absolute scale (0.1 to 30 s).

Measuring range			
SW1	ON	ON	OFF
SW2	OFF	ON	ON
5MA	1 mA	2 mA	5 mA
50MA	10 mA	20 mA	50 mA
500MA	100 mA	200 mA	500 mA
5A	1 A	2 A	5 A

Relay working mode	
ON:	Normally De-energized
OFF:	Normally Energized

Power ON delay	
ON:	6 s $\pm$ 0.5 s
OFF:	1 s $\pm$ 0.5 s


Contact input	
ON:	Latch function enable
OFF:	Inhibit function enable


Monitoring function	
ON:	Over current
OFF:	Under current

## Operation Diagrams


**Over current - N.D. relay**

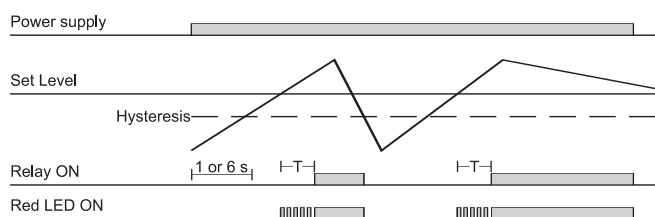


**Under current - Latch function - N.D. relay**

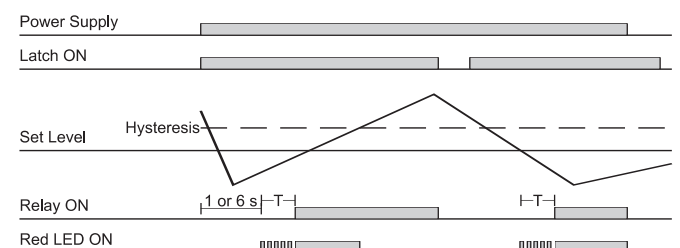

**Under current - N.D. relay**

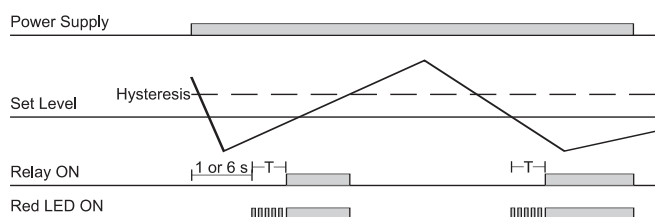


**Over current - Inhibit function - N.D. relay**

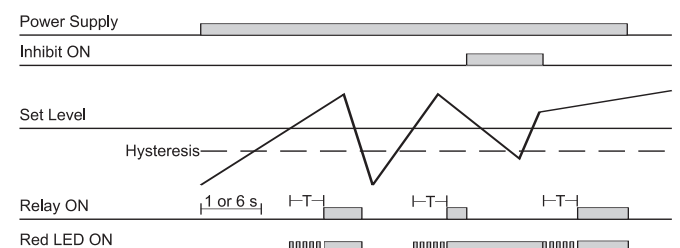




Wiring Diagrams

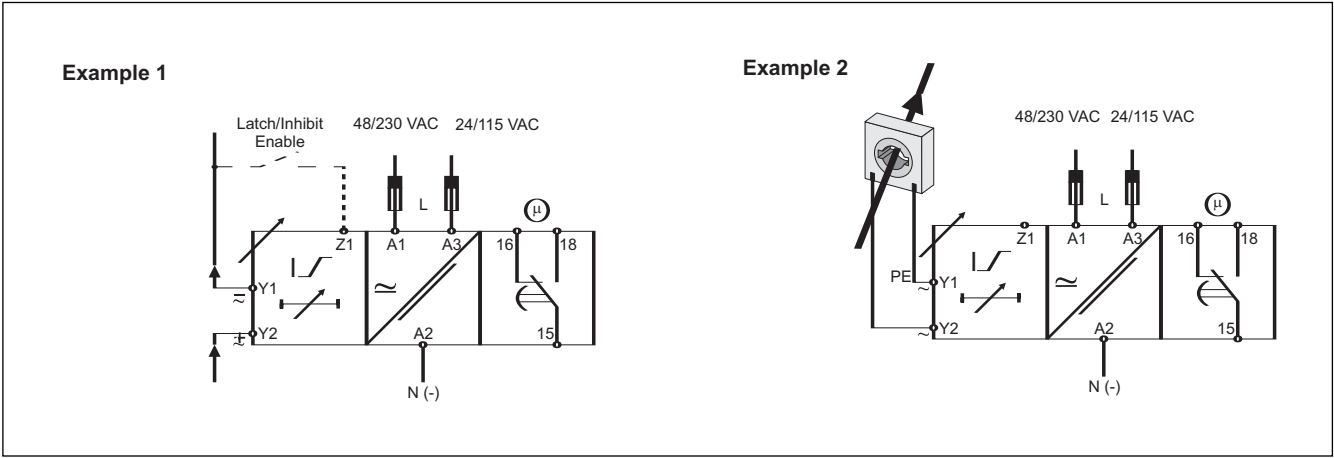

Dimensions

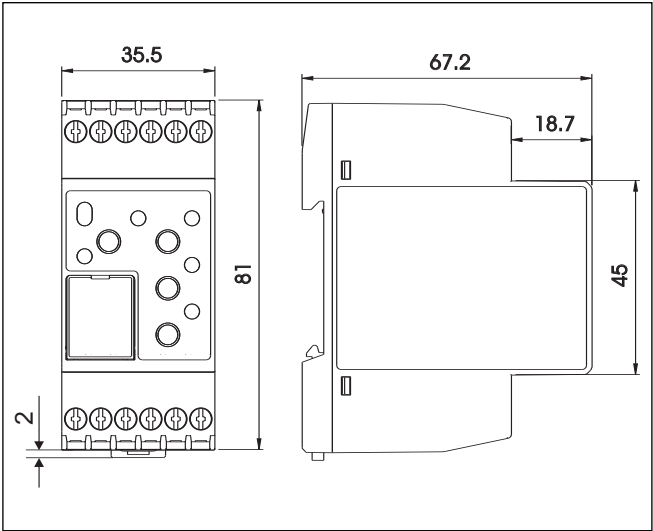

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi:](#)

[DIB71CB2350MA](#) [DIB71CB485A](#) [DIB71CB235A](#) [DIB71CB23500MA](#) [DIB71CB235MA](#) [DIB71CB48500MA](#)  
[DIB71CB4850mA](#) [DIB71CB485MA](#)