


Monitoring Relays Surge Arresters for AC systems Type DSF A/P

CARLO GAVAZZI

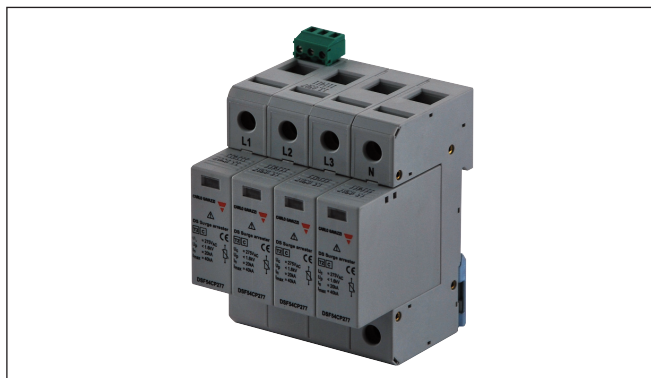

- Type 2 (class C) according to EN61643-11 (VDE 0675, part 6-11)
- Approved UL1449 3rd Edition
- Complies with IEC-61643-1, UTE C 61-740-51
- Do not require backup fuse up to 200kArms (UL 1449 3rd Ed.)
- Innovative technology to prevent dangerous failures in case of temporary overvoltages
- Suitable for unstable networks where sustained over-voltages may persist for some minutes or longer
- Plug-in cartridges
- Optical indication of exhausted cartridges (red window)
- Voltage-free contact, for remote function monitoring
- Including thermal and dynamic separating device
- Assembled unit ready for mounting
- Marked connections
- For DIN-rail mounting

Product Description

DSF A/P are Type 2 (Class C) surge arresters according to EN 61643-11 (VDE 0675, part 6-11) and UL1449 3rd edition suitable for protecting AC systems from transient overvoltage due to both indirect atmospheric discharges and switching actions.

It is available for both single and three phase AC lines, TN-S and TN-C.

The control windows (no/red indication) and the contact allow both a local and a remote monitoring of the status of the plug-in cartridges, warning the operator about the need to promptly replace the car-

tridges themselves.

These surge protecting devices are Type II hence suitable for installation in main distribution cabinet, or secondary distribution board, in installations without external LPS (Lightning Protection System) or where the distance between the LPS elements and the solar panel frames is >50m.

These devices do not require any external backup fuse thus saving space and cost. In according to UL1449 3rd Ed. and UTE C 61-740-51 DSF and can be installed on a DIN-rail in any commercially available distribution box.

Ordering Key

DSF 52 C A 277


Description	Code
Mounting	
DIN-rail	D
Function	
Surge arresters	S
Type	
Type 2 (class C) "Fuseless"	F
Cartridge dimensions	
17.5 mm	5
Configuration	
Single pole	1
Two poles (2+0)	2
Three poles (3+0)	3
4 poles (4+0)	4
Contact	
None	X
1 (relay)	C
Network	
AC 1 phase	A
AC 3 phases	P
MCOV (AC)	
150 VAC	150
300 VAC	277
385 VAC	385
460 VAC	440
550 VAC	550
750 VAC	750



No backup-fuse technology

Long duration overvoltage path

The arrester is activated in the event of electric power system failure. The voltages are much lower than transient voltages but substantially more destructive. The system is composed of a current limiter and a varistor. In the event of increased voltage level the current limiter circuit limits the current through the varistor. When the normal condition is re-established (rated line voltage), the surge arrester continues to perform its normal function.

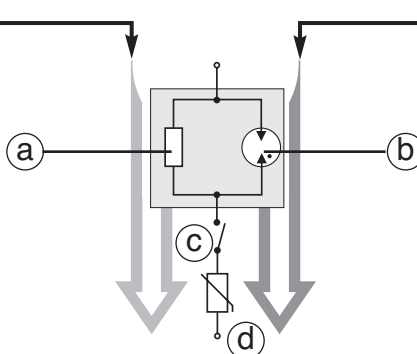

a) Current limiter b) Gas tube c) Thermal disconnecter d) Varistor

Transient (short duration) overvoltage path

The arrester is activated at the occurrence of instantaneous high voltage surges lasting only a few microseconds. Such condition states are experienced at switching operations and atmospheric discharges. The system is composed of a gas tube surge arrester and a varistor. Both components have a very short response time which is reflected in a low protective residual voltage level. This provides an efficient protection of sensitive electronic devices.

Product specifications

Max. continuous operating voltage AC DSF5xxx150 DSF5xxx277 DSF5xxx385 DSF5xxx440 DSF5xxx550 ⁽¹⁾ DSF5xxx750	MCOV 150V 300V 385V 460V 550V 750V	Voltage protection level according to UL 1449 3rd Ed. DSF5xxx150 DSF5xxx277 DSF5xxx385 DSF5xxx440 DSF5xxx550 ⁽¹⁾ DSF5xxx750	VPR < 1.2kV < 1.6kV < 1.8kV < 2.0kV < 2.5kV < 2.5kV
Nominal Voltage AC DSF5xxx150 DSF5xxx277 DSF5xxx385 DSF5xxx440 DSF5xxx550 ⁽¹⁾ DSF5xxx750	120V 277V 347V 440V 480V 690V	Response time	t_A < 25 ns
SPD (Surge Protection Device) according to EN 61643-11	Class 2	Protection fuse size (UL 1449 3rd Ed.)	Not required up to 200 kA rms
SPD (Surge Protection Device) according to IEC 61643-1	Class 2	Follow current	No
LPZ (Lightning Protection Zone)	1 --> 2	Thermal Protection	Yes
Nominal discharge surge current (8/20) DSF5xxx150 DSF5xxx277 DSF5xxx385 DSF5xxx440 DSF5xxx550 ⁽¹⁾ DSF5xxx750	I_n 20kA/pole 20kA/pole 20kA/pole 20kA/pole 20kA/pole 10kA/pole	Short-circuit current rating	I_{sc} 25kA/50Hz
Max. discharge surge current (8/20) DSF5xxx150 DSF5xxx277 DSF5xxx385 DSF5xxx440 DSF5xxx550 ⁽¹⁾ DSF5xxx750	I_{max} 50kA/pole 50kA/pole 50kA/pole 50kA/pole 50kA/pole 20kA/pole	Front window	No indication: working cartridge. Red: exhausted cartridge (to be replaced)
		Operating temperature	-40 to +80 °C

Note:

⁽¹⁾ 550V version only for
DSF51xx550,
DSF53xx550

Output Specifications

Output DSF5xCxxxx Rating	SPDT AC: 250V/0.5A 125V/3A	Cable cross-section area	max 1.5 mm ²
		Terminal torque	0.25 Nm max

General Specifications

Protection degree	IP 20	Approvals	CE, UL1449 3 rd Edition CSA
Dimensions	See drawings pag.4 fig.8		
Screw terminals Cable cross-section area	25mm ² / 3AWG (stranded) 35mm ² / 2AWG (solid)		
Terminal torque	3.5Nm / 2.58lb/ft max		
Housing material	Thermoplastic, extinguishing degree UL 94 V-0		

Installation notes

Protection distance

• If DSF is installed less than 10 m from the device to be protected, the distance can be ignored.

• If DSF and its connection wires have a total protection level $U_{p/f}$ (U_{prot}) $< 0.5 U_w$, where U_w is the breaking voltage of the device to be

protected, the distance can be neglected.

• If the protection distance is longer than 10 m, the real protection distance l_{po} can be calculated by the following formula:

$$l_{po} = (U_w - U_{p/f}) / K \text{ [m]}$$




with $K = 25 \text{ V/m}$.

Protection against over-currents and indirect contacts





DSF can be installed without further integrative protections even if a general circuit breaker/fuses with nominal current $> 125 \text{ kA}$ is installed and if in the DSF installation point the short circuit current

is $> 25 \text{ kA}$ (but $< 200 \text{ kA}$). No protection fuses are needed for backup protection.


Wiring Diagrams

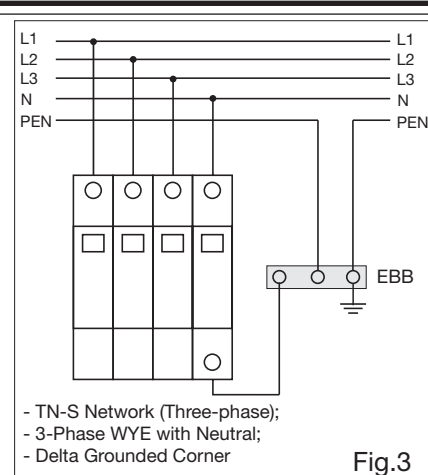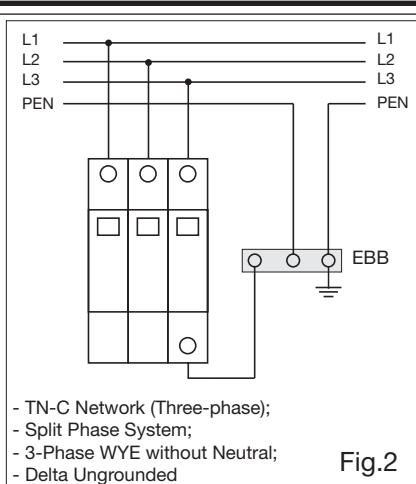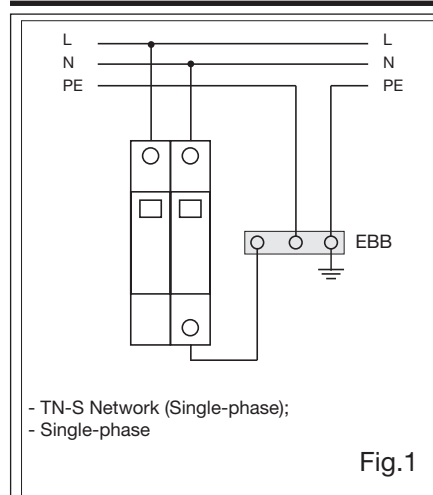

Connection Diagrams

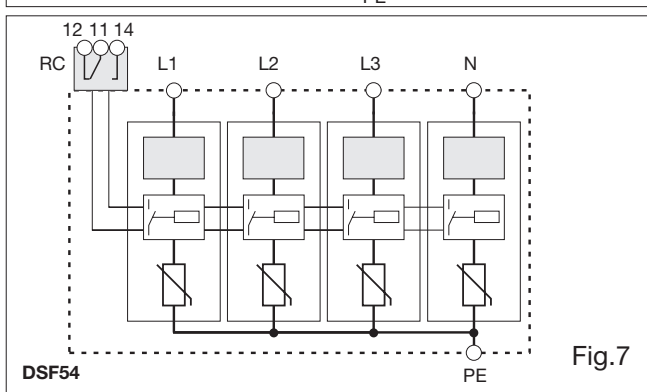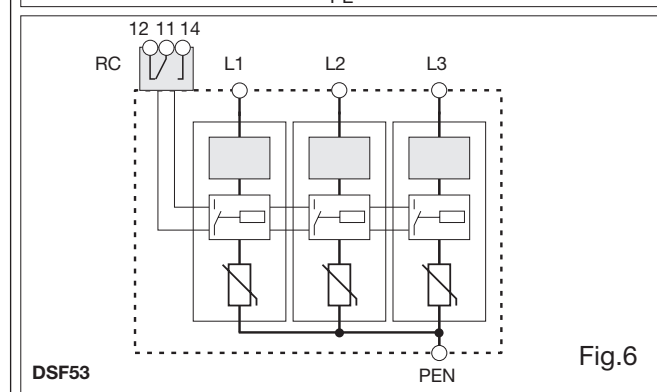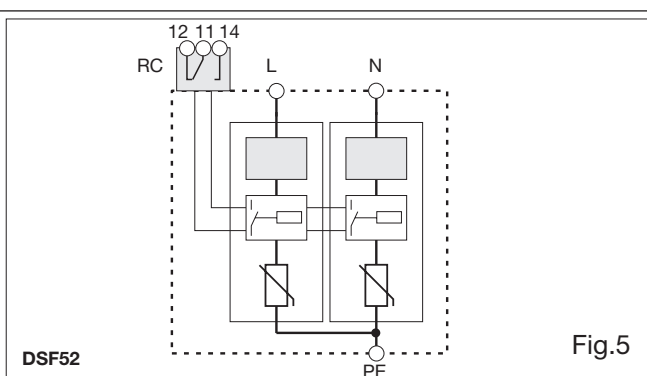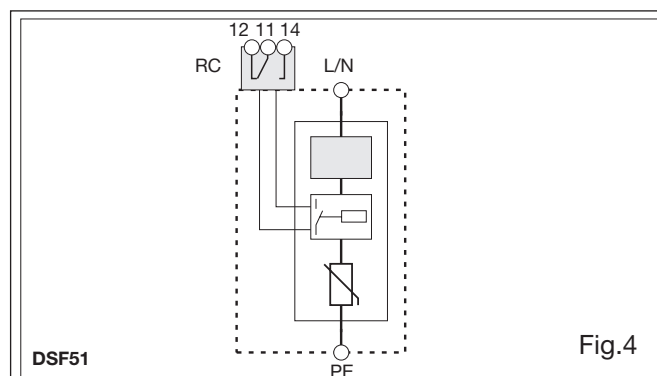

Dimensions

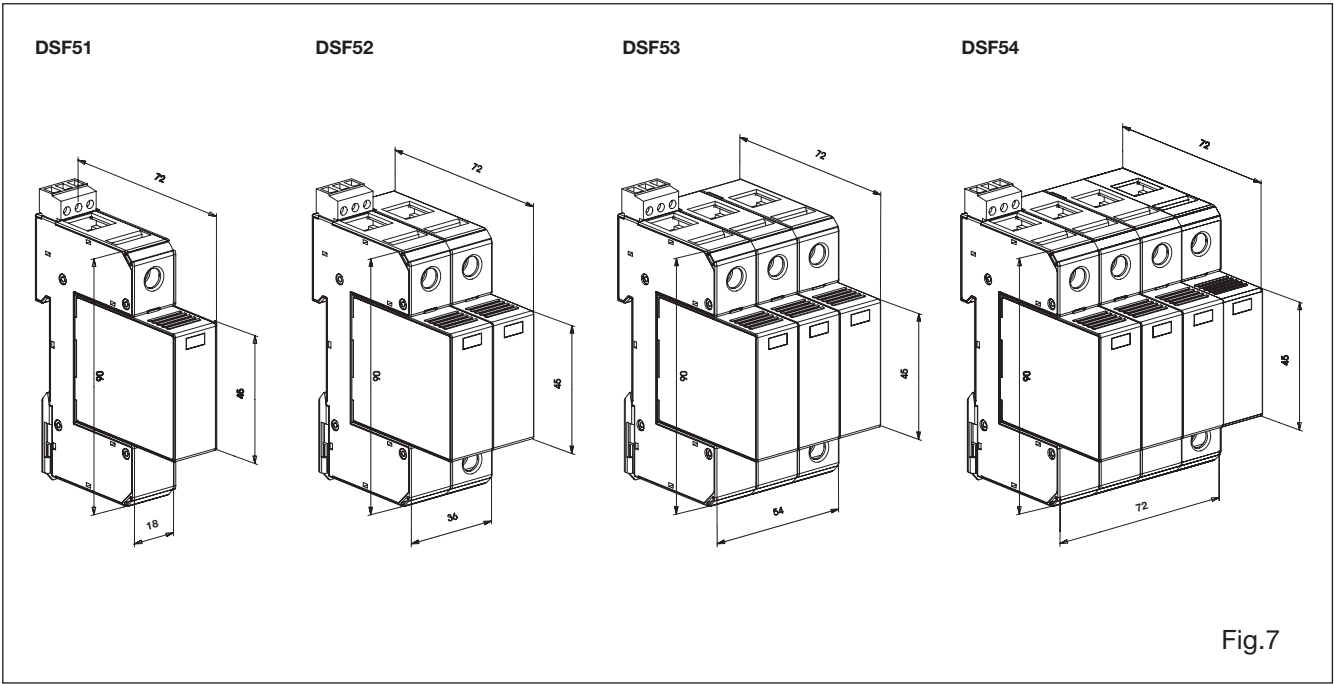


Cartridges

Ordering Codes

FOR DSF5xxx120	DS0120F
FOR DSF5xxx277	DS0277F
FOR DSF5xxx347	DS0347F
FOR DSF5xxx440	DS0440F
FOR DSF5xxx480	DS0480F

Cartridges Dimensions

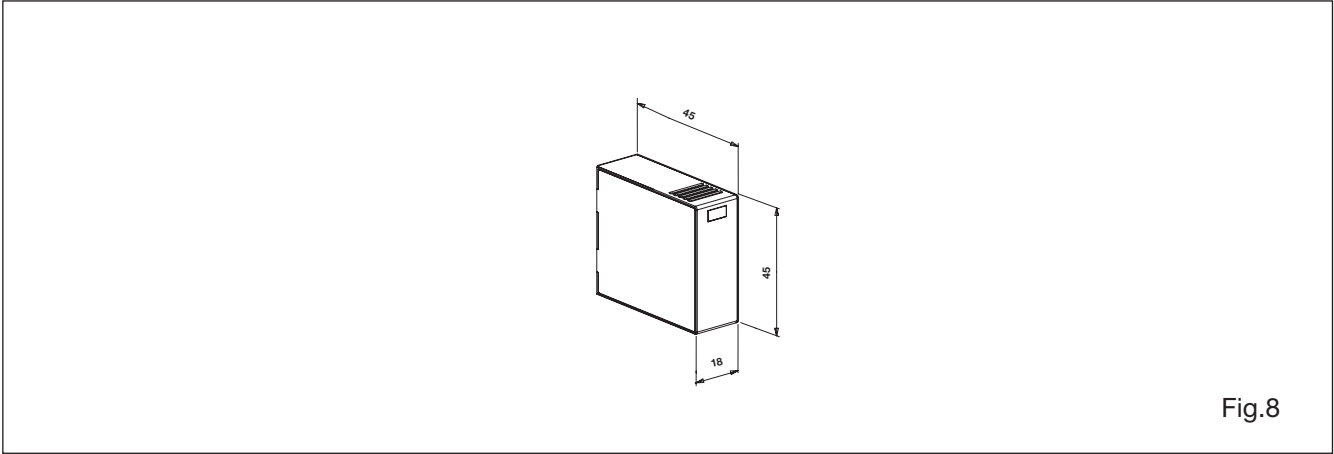

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi:](#)

[DSF54CP277](#) [DSF52CA385](#) [DSF53CP440](#) [DSF54CP440](#) [DSF52CA277](#) [DSF52CA440](#) [DSF53CP385](#)
[DSF53CP550](#) [DSF54CP385](#) [DSF53CP277](#) [DSF52CA460](#) [DSF53CP300](#) [DSF53CP460](#) [DSF54CP300](#)