

Fig. 1

- Series 830 & 832 use MM #3790 & MM #3796 pins. See page 176 for details.
- Series 831 & 833 use MM #1805 and MM #3805 receptacles and accept pin diameters from 0,38 - 0,64. See page 140 for details.
- Receptacles use Hi-Rel, 6 finger BeCu #32 contact rated at 3 amps. See page 219 for details.
- Insulators are high temp. thermoplastic.

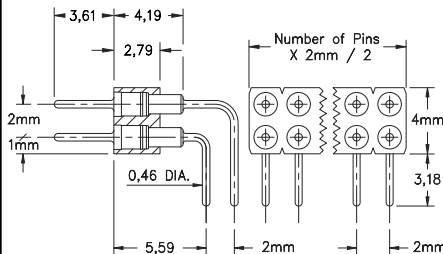
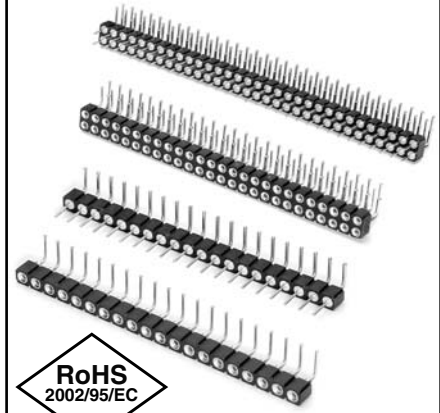


Fig. 2

Ordering Information

Fig. 1

830...001 Single Row Right Angle Header

830-10-0__-20-001000

Specify # of pins → 01-50

Fig. 2

832...001 Double Row Right Angle Header

832-10-__-20-001000

Specify # of pins → 002-100

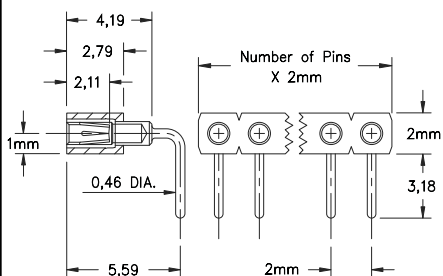


Fig. 3

Fig. 3

831...001 Single Row Right Angle Socket

831-43-0__-20-001000

Specify # of pins → 01-50

Fig. 4

833...001 Double Row Right Angle Socket

833-43-__-20-001000

Specify # of pins → 002-100

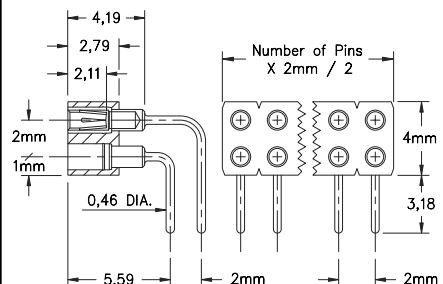


Fig. 4


For Electrical,
Mechanical & Environmental
Data, See pg. 4

For RoHS compliance
select ◇ plating code.

PLATING CODE =

10 ◇

Pin Plating



0,25µm Au

PLATING CODE =

43 ◇

Sleeve (Pin)



5,08µm Sn

Contact (Clip)



0,76µm Au