WM15



Power analyzer for three-phase systems



Description

WM15 is a power analyzer for single-, two- and three-phase systems.

Depending on the model, WM15 is equipped with a static output (pulse or alarm) or with a static output and a Modbus RTU communication port.

The self-powered version can be installed on systems up to 415 V L-L (400 V L-L for MID models), while the version with auxiliary power supply can be installed on systems up to 600 V L-L.

In combination with VMUBM2US1B1C, collected data can be transmitted via M-Bus.

Benefits

- Enhanced readability. The backlit graphical display allows the size of the digits to be adapted to the displayed variable. The instantaneous values of the current are also shown by a bar graph to have the plant situation at a glance.
- Easy navigation. The setup and navigation of the pages are very intuitive thanks to the user interface with 4 mechanical push buttons. In addition, the slideshow function automatically displays the desired measurements in sequence without having to use the keypad.
- Quick setup. Wizard and wiring correction on first startup, UCS mobile app for setup via OptoProg and optical port are some of the advantages allowing a quick, guided and errorless installations and commissioning. UCS software is available for free download.
- Accurate measurement. It is compliant with the international accuracy standard IEC/EN62053-21, and the IEC/EN61557-12 performance requirements (active power and active energy).
- Fiscal metrology. WM15 configuration access can be locked and terminals can be sealed in case of a MID certified model for fiscal metering.
- Installation flexibility. WM15 is suitable for singlephase, two-phase, three-phase and wild-leg systems with different voltage levels and grid frequencies used worldwide.

Applications

WM15 can be installed in any switchboard to control energy consumption, main electrical variables and harmonic distortion.

In panel boards, where typically three analogical ammeters are installed to give a visual feedback of the system status, WM15 provides the same information on the matrix display by means of the bar graphs.

When used to monitor a single machine, WM15 relates the energy consumption with the operating hours to schedule maintenance and detect faults. Moreover, the reset of partial counters allows to monitor each machine cycle.

Thanks to the MID certification, it can also be used for fiscal metrology.

Main functions

· Measure main electrical variables and voltage and current harmonic distortions



- · Measure active and reactive energy
- · Measure apparent energy
- Measure load operating hours
- · Transmit data to other systems via Modbus RTU
- Manage a digital output for pulses or alarm transmission
- Visualize measured variables on display and current consumption via bar graph


Main features

- System and phase variables (V L-L, V L-N, A, W/var, VA, PF, Hz)
- · Current and power (kW/kVA) demand calculation
- · Simplified 4 push buttons user interface
- · Optical port for easy configuration and diagnostic via OptoProg
- · Digital output for pulse transmission or alarm
- Optional RS485 Modbus RTU (100 ms data refresh)
- · Continuous sampling of each voltage and current
- · Backlit matrix LCD display
- · MID certified version
- cULus approved (UL 61010)
- Compliant with IEC/EN61557-12 performance requirements (active power and active energy)


>


UCS software and UCS Mobile application

- Free download: UCS desktop from Carlo Gavazzi website, UCS Mobile from Google Play Store
- Configuration via OptoProg (via Bluetooth) or RS485 from PC (via UCS desktop) or Android mobile device (via UCS Mobile)
- · Setups can be saved offline for serial programming with a single command
- · Real time data view for testing and diagnostics
- Notification of possible wiring errors and display of the corrective steps, reassignment of the correct association of the phases or the direction of the currents via software control.

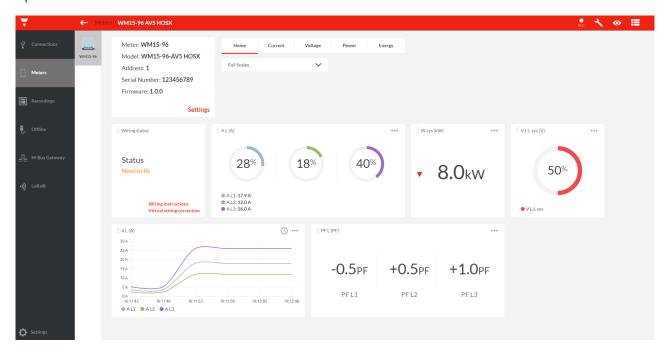




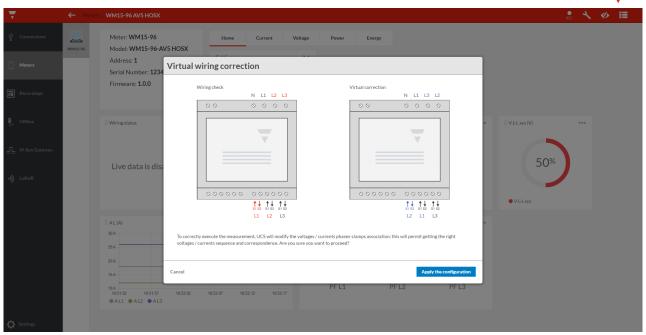

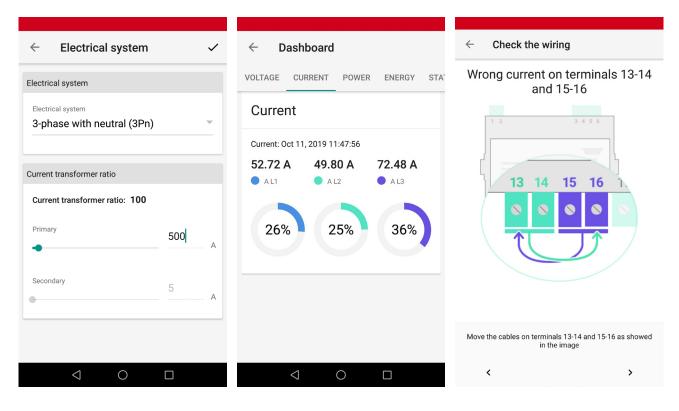



Structure

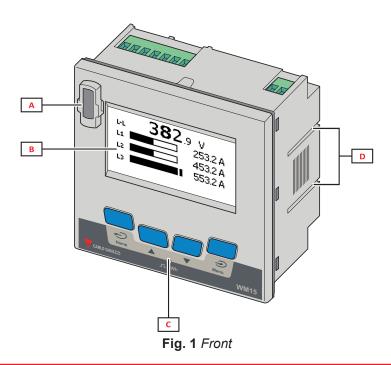

Area	Description
Α	Optical port for easy programming and diagnostic via Optoprog
В	Matrix LCD display
С	Mechanical push buttons
D	Grooves for lateral brackets





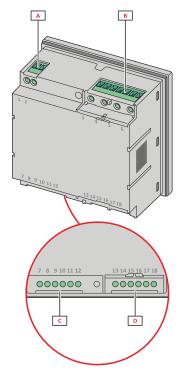


Fig. 2 Back


Area	Description
Α	Power supply: auxiliary version (non-MID models only)
В	3-phase voltage input
С	RS485 + digital output
D	3-phase current inputs




Features

General

Material	Housing: PC/ABS (UL94 V1) Transparent cover: PC (UL94 V2)
Protection degree	Front: IP51 Terminals: IP20
Terminals	Screw fixed terminal block, min:0.05; max: 2.5 mm ²
Overvoltage category	Cat. III
Pollution degree	2
Mounting	Panel 96 x 96
Weight	280 g





Environmental specifications

Operating temperature	From -25 to +55 °C/from -13 to +131 °F
Storage temperature	From -25 to +70 °C/from -13 to 158 °F
Electromechanical environ- mental condition	E2
Mechanical environmental condition	M2

NOTE: R.H. < 90 % non-condensing @ 40 °C / 104 °F.



Input and output insulation

Туре	Power supply (H) [kV]	Measurement inputs [kV]	Digital output [kV]	RS485 serial port [kV]
Power supply (H)	-	Base (AV5 3H)	Double/Reinforced	Double/Reinforced
Measurement inputs	Base (AV5 3H)	-	Double/Reinforced	Double/Reinforced
Digital output	Double/Reinforced	Double/Reinforced	-	Functional (100 V ac/ dc)
RS485 serial port	Double/Reinforced	Double/Reinforced	Functional (100 V ac/ dc)	-

According to: EN 61010-1, EN 50470-1 (MID). Overvoltage category III. Pollution degree 2.



Compatibility and conformity

Directives	2014/32/EU (MID) 2014/35/EU (LVT - Low Voltage) 2014/30/EU (EMC - Electro Magnetic Compatibility) 2011/65/EU (Electric-electronic equipment hazardous substances)
Standards	Electromagnetic compatibility (EMC) - emissions and immunity: EN 62052-11; EN 50470-1 (MID) Electrical safety: EN 61010-1, EN 50470-1 (MID) Metrology: EN62053-21, EN62053-23, IEC61557-12, EN 50470-3 (MID), IEC/EN61557-12 (active power and active energy, MID models only) Pulse output: IEC 62053-31
Approvals	C UL US LISTED



Electrical specifications

Electrical system		
	Single-phase (2-wire) Two-phase (3-wire)	
Managed electrical system	Three-phase with neutral (4-wire)	
	Three-phase without neutral (3-wire)	
	Wild leg system (three-phase, four-wire delta)	
MID managed electrical evetem	Three-phase with neutral (4-wire)	
MID managed electrical system	Three-phase without neutral (3-wire) (ARON)	
Voltage inputs - MID		
Voltage connection	Direct	
Rated voltage L-N 230 V		
Rated voltage L-L 400 V		
Voltage tolerance	From 0.8 to 1.15 Un	
Overload Continuous: 1.5 Un max		
Input impedance	Refer to "Power supply"	
Frequency	50 Hz	



Voltage inputs Non MID models				
	AV5 3X	AV5 3H		
Voltage connection	Direct			
Rated voltage L-N (from Un min to Un max)	1 120 to 240 V 120 to 347 V			
Rated voltage L-L (from Un min to Un max)	208 to 415 V	208 to 600 V		
Voltage tolerance	From 0.8 to 1.15 Un			
Overload	Continuous: 1.5 Un max			
Input impedance	Refer to "Power supply"	>1600 kΩ		
Frequency	From 45 to 65 Hz			

Note: for MID versions the voltage range is limited to 3x230 (400) V, frequency to 50Hz.

NOTE: WM15 can also be installed in a wild leg system (three phases, four delta wires), where one of the phase-neutral voltages is higher than the other two.

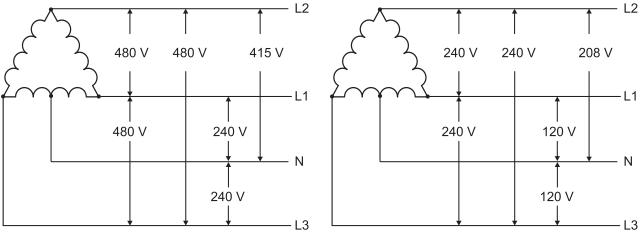


Fig. 3 AV5 3H

Fig. 4 AV5 3X, AV5 3H

Current inputs		
Current connection	Via CT	
CT transformation ratio	2000 max	
Rated current (In)	5 A	
Minimum current (Imin)	0.05 A	
Maximum current (Imax)	6 A	
Start-up current (lst)	10 mA	
Overload	For 500 ms: 20 Imax (120 A)	
Input impedance	< 0.2 VA	
Crest factor	3	
Measurement type	by means of internal shunts non mutually insulated (AV5 3X) by means of internal CT (AV5 3H)	

Power supply

	AV5 3X	AV5 3H
Туре	Self power supply Auxiliary power supply from 120 to V ac/dc	
Frequency	50/60 Hz	





Measurements

Method TRMS measurements of distorted waveforms

Available measurements

Active energy	Unit	System	Phase
Imported (+) Total	kWh+	•	•
Imported (+) partial	kWh+	•	-
Exported (-) Total	kWh-	•	-
Exported (-) partial	kWh-	•	-

Reactive energy	Unit	System	Phase
Imported (+) Total	kvarh+	•	-
Imported (+) partial	kvarh+	•	-
Exported (-) Total	kvarh-	•	-
Exported (-) partial	kvarh-	•	-

Apparent energy	Unit	System	Phase
Total	kVAh	•	-
Partial	kVAh	•	-

Run hour meter	Unit	System	Phase
Total (kWh+)	hh:mm	•	-
Partial (kWh+)	hh:mm	•	-
Total (kWh-)	hh:mm -	•	-
Partial (kWh-)	hh:mm -	•	-

Electrical variable	Unit	System	Phase
Voltage L-N	V	•	•
Voltage L-L	V	•	•
Current	A	•	•
DMD	A	-	•
DMD MAX	A	-	•
Active power	W	•	•
DMD	W	•	-
DMD MAX	W	•	
Apparent power	VA	•	•
DMD	VA	•	-
DMD MAX	VA	•	
Reactive power	Var	•	•
Power factor	PF	•	•
Frequency	Hz	•	-
THD Current*	THD A %	-	•
THD Voltage L-N*	THD L-N %	-	•
THD Voltage L-L*	THD L-L %	-	•

^{*} Up to 15th harmonic

NOTE: the available variables depend on the type of system set.

Total imported active energy (kWh TOT) is the only MID certified meter. Apparent energy, reactive energy and exported active energy are not MID certified. Partial meters are not MID certified.

All the variables calculated by the meter are referred to the primary current of the current transformer.





Energy metering

For every measuring interval time, the energies of the single phases are summed; according to the sign of the result, the positive (kWh+) or negative totalizer (kWh-) is increased. Example:

P L1= +2 kW, P L2= +2 kW, P L3= -3 kW Integration time = 1 hour +kWh=(+2+2-3)x1h=(+1)x1h=1 kWh-kWh=0 kWh



Measurement accuracy

Current	
From 0.1 In to Imax	± 0.5% rdg
From 0.01 In to 0.05 In	± 1% rdg

Phase-phase voltage	
From Un min -20% to Un max +15%	± 0.5% rdg

Phase-neutral voltage	
From Un min -20% to Un max +15%	± 0.5% rdg

Active and apparent power	
From 0.05 In to Imax (PF=0.5L - 1 - 0.8C)	± 1% rdg
From 0.01 In to 0.05 In (PF=1)	± 1.5% rdg

Reactive power	
From 0.1 In to Imax (sinφ=0.5L	
- 0.5C)	± 2% rdg
From 0.05 In to Imax (sinφ=1)	
From 0.05 In to 0.1 In	
(sinφ=0.5L - 0.5C)	± 2.5% rdg
From 0.02 In to 0.05 In (PF=1)	
Active energy	Class 1 EN62053-21, Class B EN50470-3 (MID)
Reactive energy	Class 2 (EN62053-23)

Frequency	
From 45 to 65 Hz	± 0.1% rdg

Measurement accuracy according to IEC/EN61557-12 (MID models)	
Active power	Performance class 1
Active energy	Performance class 2



Measurement resolution

Variable	Display resolution	Resolution by serial communication
Energy	0.01 kWh/kvarh/kVAh 0.001 kWh/kvarh/kVAh	
Power	0.1 kW/kvar/kVA	0.1 W/var/VA
Current*	0.1 A	0.001 A
Voltage	0.1 V	
Frequency	0.1 Hz	0.001 Hz
THD	0.01 %	
Power factor	0.01	

*Note: value referred to CT ratio =1

Display

Туре	Matrix 128x64 dots
Refresh time	500 ms
Description	Backlit LCD
	Instantaneous: 5+1 dgt
Variable readout	Power factor: 1+2 dgt
	Energy: 8+2 dgt

LED

	Red. Pulse weight: proportional to energy consumption and depending on the CT ratio (16 Hz maximum frequency):	
	Weight (kWh per pulse)	CT ratio
Front	0.001	≤ 7
	0.01	From 7.1 to 70
	0.1	From 70.1 to 700
	1	From 700.1 to 2000

Carlo Gavazzi Controls S.p.A. 11 26/01/2021 WM15 DS ENG



Digital outputs



Digital output

Connection type	Screw terminals	
Maximum number of outputs	1	
Туре	Opto-mosfet	
Function Pulse output or alarm output		
Features	V _{ON} 2.5 V ac/dc, max 100 mA V _{OFF} 42 V ac/dc	
Configuration parameters	Output function (pulse/alarm) Pulse weight (from 0.001 to 10 kWh per pulse) Pulse duration (30 or 100 ms) Output normal status (NO or NC)	
Configuration mode	Via keypad or UCS software	

Communication ports



RS485 port

Protocol	Modbus RTU	
Devices on the same bus Max 160 (1/5 unit load)		
Communication type	Multidrop, bidirectional	
Connection type	2 wires	
	Modbus address (from 1 to 247)	
Configuration parameters	Baud rate (9.6 / 19.2 / 38.4 / 115.2 kbps)	
	Parity (None/ Odd/ Even)	
Refresh time	≤ 100 ms	
Configuration mode	Via keypad or UCS software	



Optical port

Compatible accessories	OptoProg	
Function	Configuration and diagnostic via UCS Mobile app or UCS software	



Connection Diagrams

Non MID models

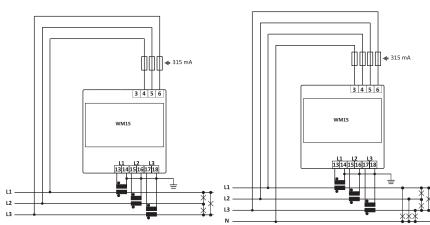


Fig. 5 Three-phase without neutral (3-wire)

Fig. 6 Three-phase with neutral (4-wire)

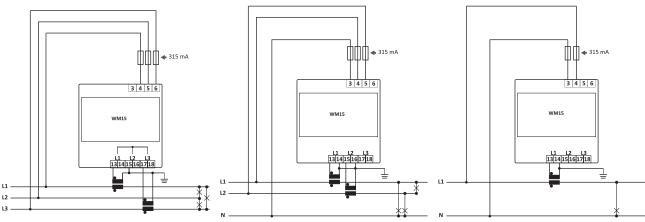



Fig. 7 Three-phase without neutral (3-wire)

Fig. 8 Two-phase system with neutral (3-wire)

Fig. 9 Single-phase (2-wire)



MID models

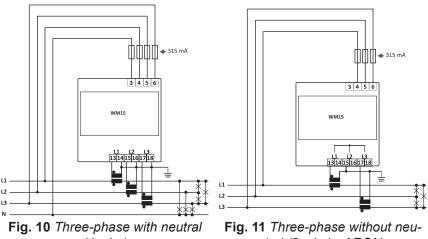

(4-wire)

tral (3-wire) - ARON

Power supply (non MID models)




Fig. 12 Auxiliary power supply (H)

Output





Fig. 13 Digital output



Communication






Fig. 15 Last device on RS485



References

Ord	der code			
€ w	M15 96 A	V5 3 X □ □		
Enter the	code opti	on instead of \square		
Code	Options	ptions Description		
W		-		
M		-		
1		-		
5		-		
9		-		
6		-		
Α		-		
V		-		
5		-		
3		-		
Х		Self power supply. Voltage inputs 415 V LL		
	os	Digital output and RS485		
	ОХ	Digital output only		
	Х	Non MID		
	PFB	MID (3P and 3P.n)		

• PFB: only the total positive totalizer (kWh+) is certified according to MID. The negative energy totalizer is available but not certified according to MID.

T WM15 96 AV5 3 H OS X

Code	Options	Description
W	-	-
M	-	-
1	-	-
5	-	-
9	-	-
6	-	-
Α	-	-
V	-	-
5	-	-
3	-	-
Н	-	Auxiliary power supply, from 120 to 240 V ac/dc. Voltage inputs 600 V LL
os	-	Digital output and RS485
X	-	Non MID



CARLO GAVAZZI compatible components

Purpose	Component name/part number	NOTES
Quickly configure several analyzers via optical interface	OptoProg	See relevant datasheet
Configure analyzer via desktop application	UCS software	Available for free download at: www.productselection.net
Configure analyzer via Android application	UCS Mobile	Available for free download at: https://play.google.com/store
Aggregate, store and transmit data to other systems	UWP 3.0	See relevant datasheet
Transit data via M-Bus	VMUBM2US1B1C	See relevant datasheet



COPYRIGHT ©2021

Content subject to change. Download the PDF: www.productselection.net

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Carlo Gavazzi:

WM1596AV53XOSX WM1596AV53XOXX