



SRS4050x012xxx Sixteenth Brick Converters



Features

- High Efficiency: 91.5% at 5V/17A output
- Excellent thermal performance
- Low profile in standard footprint: 1.3"x0.9"x0.37"
- Remote sense, remote control, over-voltage, over-current, short-circuit, and over temperature protection
- Monotonic start-up into pre-biased load
- No minimum load required
- Fixed frequency operation
- Basic Insulation
- UL 60950-1 2nd edition recognized

Applications

- Wireless Networks
- Telecom / Datacom
- Electronic Data Processing / Servers
- Distributed Power Architectures

Options

- SMT or through-hole package
- Baseplate
- Auto-restart or lock-up protection mode
- Negative / Positive enable logic

The SRS4 Series of 1/16-Brick DC/DC Converters utilize proprietary technologies to achieve market leading efficiencies and thermal performance in the latest industry standard package. The 1/16-brick footprint is 43% smaller than standard 1/8 brick's, thus saving valuable board real estate. The SRS4 Series of converters incorporate automated assembly techniques on a single board, low profile design, and are available in both through-hole and surface mount versions. For higher current operation in extreme thermal environment, a baseplate is provided as an option. The industry leading performance makes the SRS4 Series of converters excellent choices for today's densely packed systems.

The SRS4 converters provide a monotonic start-up from both the input voltage and the ON/OFF control under all load conditions, including pre-biased output. These converters have a fast dynamic response and are stable over the full range of input voltage, load current, load capacitance, capacitor ESR, and temperature. They feature tight line and load regulations, and are fully protected from abnormal conditions of input/output voltages, output current and operating temperature. The SRS4 converters are an ideal choice for any limited board space, high current and/or low output voltage applications such as telecom, datacom, wireless networks, or servers.

† UL is a registered trademark of Underwriters Laboratory Inc.



Absolute Maximum Rating

Excessive stresses over these absolute maximum ratings can cause permanent damage to the converter. Operation should be limited to the conditions outlined under the Electrical Specification Section.

Parameter	Symbol	Min	Max	Unit
Input Voltage (continuous)	V_i	-0.5	75	Vdc
Input Voltage (< 100ms, operating)	V_i	-	100	Vdc
Input Voltage (continuous, non-operating)	V_i	-	100	Vdc
I/O Isolation Voltage		-	2,250	Vdc
Operating Ambient Temperature (See Thermal Consideration section)	T_o	-40	85*	°C
Storage Temperature	T_{stg}	-55	125	°C

* Derating curves provided in this datasheet end at 85°C ambient temperature. Operation above 85°C ambient temperature is allowed provided the temperatures of the key components or the baseplate do not exceed the limit stated in the Thermal Considerations section.

Electrical Specifications

These specifications are valid over the converter's full range of input voltage, resistive load, and operating temperature unless noted otherwise.

Input Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Input Voltage	V_i	36	48	75	Vdc
Input Current	I_{in_Max}	-	-	3.5	A
Quiescent Input Current (Typical V_{in})	I_{in_Qsnt}	-	55	75	mA
Standby Input Current	I_{in_Stdby}	-	1	3	mA
Inrush Transient	I^2t	-	-	0.1	A ² s
Input Reflected-ripple Current, Peak-to-peak (5 Hz to 20 MHz, 12 μ H source impedance)	-	-	10	-	mA
Input Ripple Rejection			-	-	dB
Input Turn-on Voltage Threshold	-	34	35	36	V
Input Turn-off Voltage Threshold	-	30	32	34	V
Input Voltage ON/OFF Hysteresis	-	-	3	-	V

Output Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Output Voltage Set Point	V_o		5.0		V
Output Voltage Set Point Accuracy (V_i = Typical V_{in} ; I_o = I_{o_max} ; T_a = 25°C)	-	-1.5		+1.5	% V_o
Output Voltage Set Point Accuracy (over all conditions)	-	-3		+3	% V_o
Output Regulation:					
Line Regulation (full range input voltage, 1/2 full load)	-	-	0.05	0.2	% V_o
Load Regulation (full range load, Typical V_{in})	-	-	0.05	0.2	% V_o
Temperature (T_a = -40°C to 85 °C)	-	-	0.1		% V_o
Output Current	I_o	0	-	12	A
Output Power	P_o	0		60	W
Efficiency (Typical V_{in} ; I_{o_max} , T_A = 25°C)	η	-	91.5	-	%
Output ripple frequency	-	280	300	320	kHz
Output Ripple and Noise Voltage RMS					
Peak-to-peak (5 Hz to 20 MHz bandwidth, Typical V_{in})	-	-	-	45	mVrms
Peak-to-peak (5 Hz to 20 MHz bandwidth, Typical V_{in})	-	-	-	120	mVp-p
External Load Capacitance	-	-	-	10,000	μ F



Output Specifications (continued)

Parameter	Symbol	Min	Typ	Max	Unit
Startup Delay, duration from enabling signal to Vo reaches 10% of its set point. (Typical Vin; Io_max, TA = 25°C)			1.5		ms
Startup Time, duration for Vo to rise from 10% of its set point to within its regulation band. (Typical Vin; Io_max, TA = 25°C)			3		ms
Output Over Current Protection Set Point / Io_max		103	-	140	%
Output Over Voltage Protection Set Point* / Vo_typical		115	125	135	%
Output Trim Range in % of Vo_typical		80	-	110	%
Output Remote Sense Range in % of Vo_typical				10	%
Dynamic Response (Vi = 48V; Ta = 25°C; Load transient 0.1A/μs)					
Load steps from 50% to 75% of full load:					
Peak deviation			3		%Vo
Settling time (within 10% band of Vo deviation)			100		μs
Load step from 50% to 25% of full load					
Peak deviation			3		%Vo
Settling time (within 10% band of Vo deviation)			100		μs

General Specifications

Parameter	Symbol	Min	Typ	Max	Unit
Remote Enable					
Logic Low:					
ION/OFF = 1.0mA	VON/OFF	0	-	1.2	V
VON/OFF = 0.0V	ION/OFF	-	-	1.0	mA
Logic High:					
ION/OFF = 0.0μA	VON/OFF	3.5	-	15	V
Leakage Current	ION/OFF	-	-	50	μA
Over-temperature Protection set point	To	-	120	-	°C
Isolation Capacitance	-	-	1200	-	pF
Isolation Resistance	-	10	-	-	MΩ
Calculated MTBF Telecordia SR-332, full load, 40°C, Typ. Vin			3.8		10 ⁶ -hour
Calculated MTBF Telecordia SR-332, 50% load, 25°C, Typ. Vin			6.3		10 ⁶ -hour

Characteristic Curves

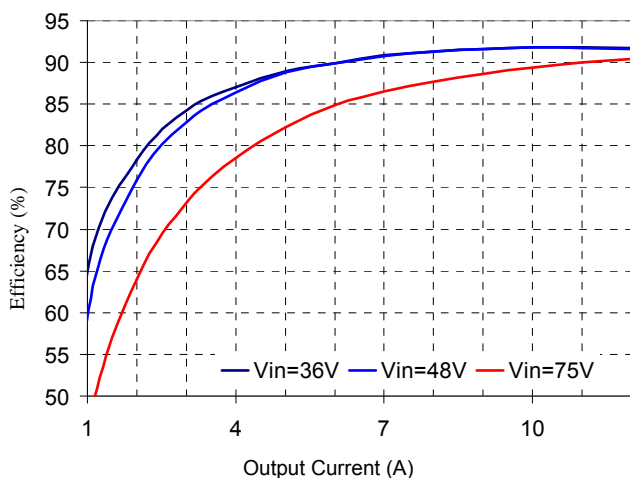


Figure 1. Efficiency vs. Load Current (25°C)

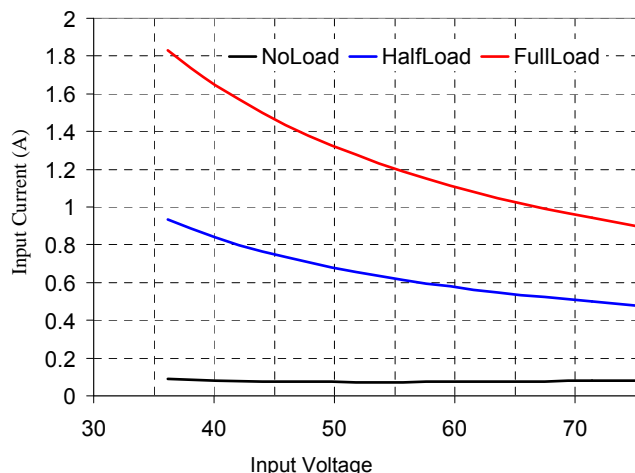


Figure 2. Input Characteristics

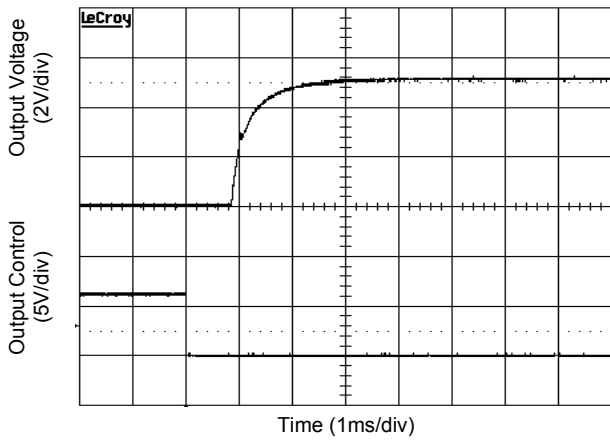


Figure 3. Start-Up from Enable Control
(Typical input voltage and full load)

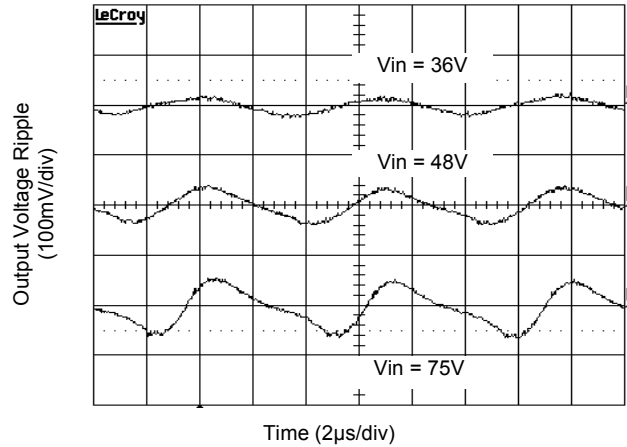


Figure 4. Output Ripple Voltage at Full Load

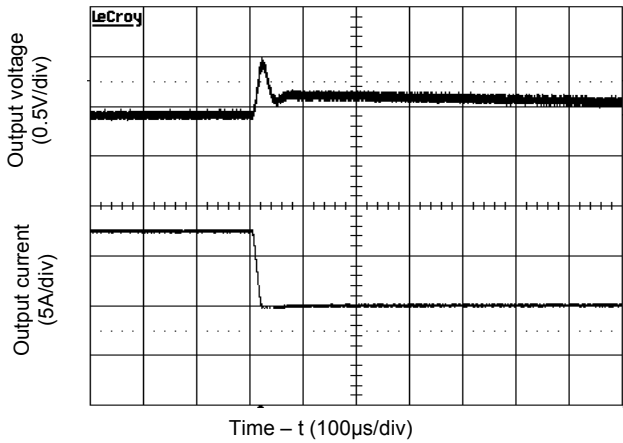


Figure 5. Transient Load Response
(Typical Vin, 75% to 50% full load step at a slew rate 0.1A/µs)

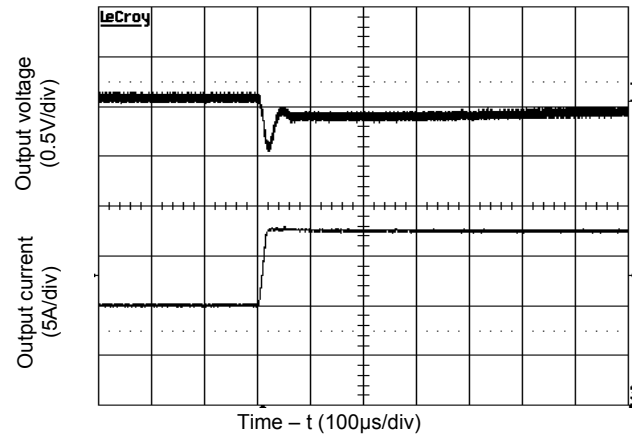


Figure 6 Transient Load Response
(Typical Vin, 50% to 75% full load step at a slew rate 0.1A/µs)

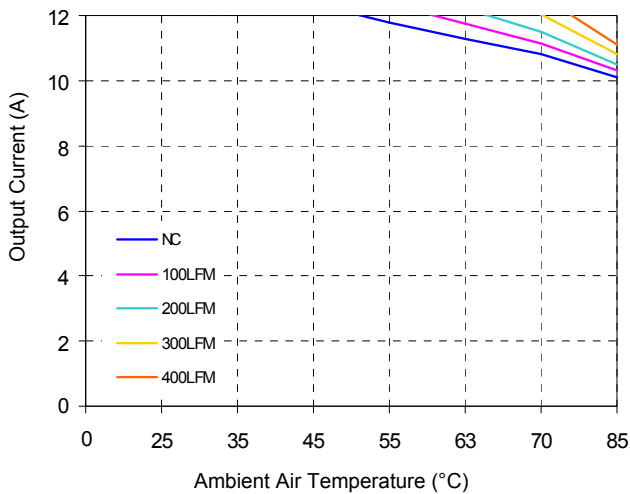


Figure 7. Current Derating Curve for Airflow Direction 1
(Ref. Figure. 8 for Airflow Direction; typical Vin, open frame, unit soldered onto a fixture board.)

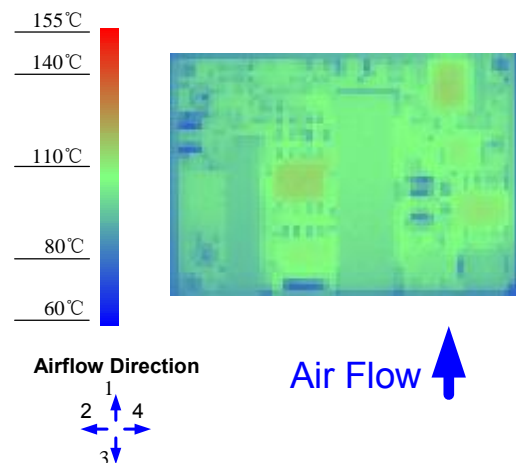


Figure 8. Thermal Image for Airflow Direction 1
(11.5A output, 55°C ambient 200 LFM, typical Vin, open frame, unit soldered onto a fixture board.)



Feature Descriptions

Remote ON/OFF

The converter can be turned on and off by changing the voltage between the ON/OFF pin and Vin(-). The SRS4 Series of converters are available with factory selectable positive logic and negative logic.

For the negative control logic, the converter is ON when the ON/OFF pin is at a logic low level and OFF when the ON/OFF pin is at a logic high level. For the positive control logic, the converter is ON when the ON/OFF pin is at a logic high level and OFF when the ON/OFF pin is at a logic low level.

With the internal pull-up circuitry, a simple external switch between the ON/OFF pin and Vin(-) can control the converter. A few example circuits for controlling the ON/OFF pin are shown in Figures 9, 10 and 11.

The logic low level is from 0V to 1.2V and the maximum sink current during logic low is 1mA. The external switch must be capable of maintaining a logic-low level while sinking up to this current. The logic high level is from 3.5V to 15V. The converter has an internal pull-up circuit that ensures the ON/OFF pin at a high logic level when the leakage current at ON/OFF pin is no greater than 50µA.

Remote SENSE

The remote SENSE pins are used to sense the voltage at the load point to accurately regulate the load voltage and eliminate the impact of the voltage drop in the power distribution path.

SENSE(+) and SENSE(-) pins should be connected between the points where voltage regulation is desired. The voltage between the SENSE pins and the output pins must not exceed the smaller of 0.5V or 10% of typical output voltage.

$$[V_{out(+)} - V_{out(-)}] - [SENSE(+)- SENSE (-)] < \text{MIN}\{0.5V, 10\%V_o\}$$

When remote sense is not used, the SENSE pins should be connected to their corresponding output pins. If the SENSE pins are left floating, the converter will deliver an output voltage slightly higher than its specified typical output voltage.

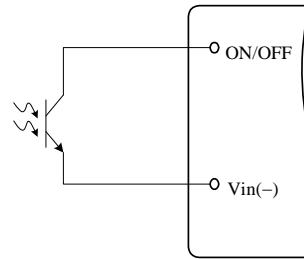


Figure 9. Opto Coupler Enable Circuit

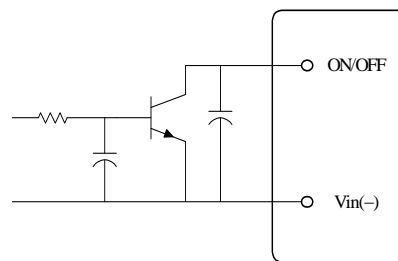


Figure 10. Open Collector Enable Circuit

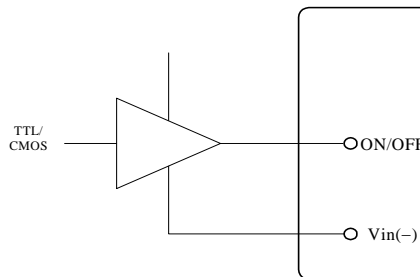


Figure 11. Direct Logic Drive

Output Voltage Adjustment (Trim)

The trim pin allows the user to adjust the output voltage set point. To increase the output voltage, an external resistor is connected between the TRIM pin and SENSE(+). To decrease the output voltage, an external resistor is connected between the TRIM pin and SENSE(-). The output voltage trim range is 80% to 110% of the specified typical output voltage. The circuit configuration for trim down operation is shown in Figure 14.

To decrease the output voltage, the value of the external resistor should be



$$R_{down} = \left(\frac{511}{\Delta} - 10.22 \right) (k\Omega)$$

Where

$$\Delta = \left(\frac{|V_{nom} - V_{adj}|}{V_{nom}} \right) \times 100$$

and

V_{nom} = Typical Output Voltage

V_{adj} = Adjusted Voltage

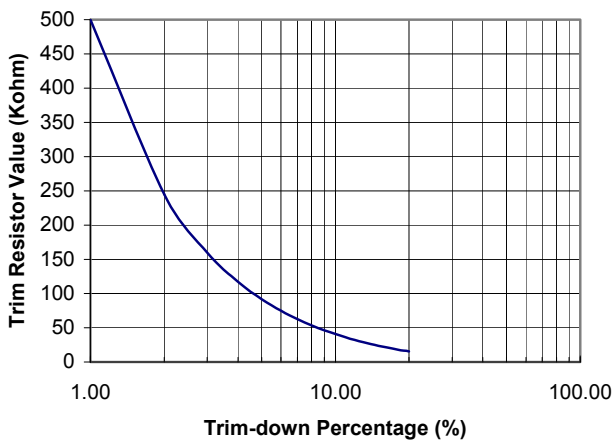


Figure 12. Trim-Down Resistor Selection

The circuit configuration for trim up operation is shown in Figure 15.

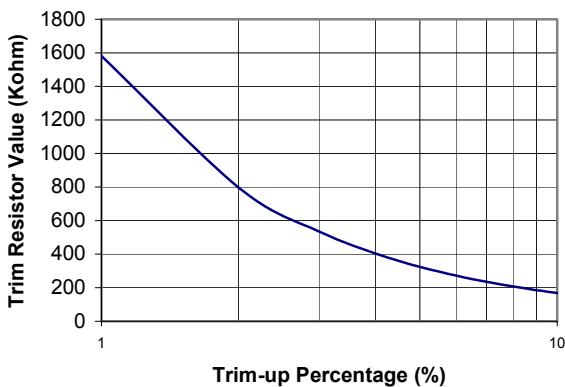


Figure 13. Trim-Up Resistor Selection

To increase the output voltage, the value of the resistor should be:

$$R_{up} = \left(\frac{5.11 V_o (100 + \Delta)}{1.225 \Delta} - \frac{511}{\Delta} - 10.22 \right) (k\Omega)$$

Where V_o = Typical Output Voltage

This equation applies to typical output voltage of 1.5V or higher.

As the output voltage at the converter output terminals are higher than the specified typical level when using the trim up and/or remote sense functions, it is important to make sure that the voltage at the output terminals does exceed the maximum power rating of the converter as given in the Specifications table.

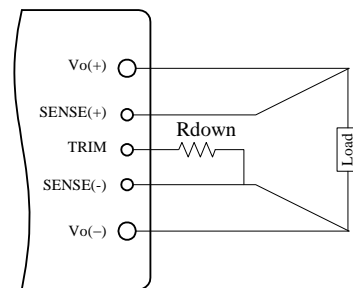


Figure 14. Circuit to Decrease Output Voltage

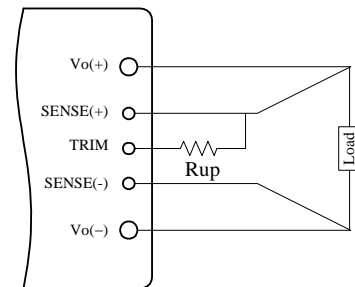


Figure 15. Circuit to Increase Output Voltage

Input Under-Voltage Lockout

This feature prevents the converter from starting until the input voltage reaches the turn-on voltage threshold, and keeps the converter running until the input voltage falls below the turn-off voltage threshold. Both turn-on and turn-off voltage thresholds are defined in the Input Specifications table. The hysteresis prevents oscillations.



Output Over-Current Protection (OCP)

This converter can be ordered in either latch-off or auto-restart version upon OCP, OVP, and OTP.

With the latch-off version, the converter will latch off when the load current exceeds the limit. The converter can be restarted by toggling the ON/OFF switch or recycling the input voltage.

With the auto-restart version, the converter will operate in a hiccup mode (repeatedly try to restart) until the cause of the over-current condition is cleared.

Output Over-Voltage Protection (OVP)

With the latch-off version, the converter will latch off when the output voltage exceeds the limit. The converter can be restarted by toggling the ON/OFF switch or recycling the input voltage.

With the auto-restart version, the converter will operate in a hiccup mode (repeatedly try to restart) until the cause of the over-voltage condition is cleared.

Over Temperature Protection (OTP)

With the latch-off version, the converter will shut down and latch off if an over-temperature condition is detected. The converter has a temperature sensor located at a carefully selected position in the converter circuit board, which represents the thermal condition of key components of the converter. The thermal shutdown circuit is designed to turn the converter off when the temperature at the sensor reaches 120°C. The module can be restarted by toggling the ON/OFF switch or recycling the input voltage.

With the auto-restart version, the converter will resume operation after the converter cools down.

Design Considerations

Input Source Impedance

As with any DC/DC converter, the stability of the SRS4 converters may be compromised if the source impedance is too high or inductive. It's desirable to keep the input source ac-impedance as low as possible. Although the converters are designed to be stable without adding external input capacitors for typical source impedance, it is recommended to add 100 μ F low ESR electrolytic capacitors at the input of the converter

for each 100W output power, which reduces the potential negative impact of the source impedance on the converter stability. These electrolytic capacitors should have sufficient RMS current rating over the operating temperature range.

Safety Considerations

The SRS4 Series of converters are designed in accordance with EN 60950 Safety of Information Technology Equipment Including Electrical Equipment. The converters are recognized by UL in both USA and Canada to meet the requirements in UL 60950, Safety of Information Technology Equipment and applicable Canadian Safety Requirement, and ULc 60950. Flammability ratings of the PWB and plastic components in the converter meet 94V-0.

To protect the converter and the system, an input line fuse is highly recommended on the un-grounded input end.

Thermal Considerations

The SRS4 Series of converters can operate in various thermal environments. Due to the high efficiency and optimal heat distribution, these converters exhibit excellent thermal performance.

The maximum allowable output power of any power converter is usually determined by the electrical design and the maximum operating temperature of its components. The SRS4 Series of converters have been tested comprehensively under various conditions to generate the derating curves with the consideration for long term reliability.

The thermal derating curves are highly influenced by the test conditions. One of the critical variables is the interface method between the converter and the test fixture board. There is no standard method in the industry for the derating tests. Some suppliers use sockets to plug in the converter, while others solder the converter into the fixture board. It should be noticed that these two methods produce significantly different results for a given converter. When the converter is soldered into the fixture board, the thermal performance of the converter is significantly improved compared to using sockets due to the reduction of the contact loss and the thermal impedance from the pins to the fixture board.



Other factors affecting the results include the board spacing, construction (especially copper weight, holes and openings) of the fixture board and the spacing board, temperature measurement method and ambient temperature measurement point. The thermal derating curves in this datasheet are obtained using a PWB fixture board and a PWB spacing board with no opening, a board-to-board spacing of 1", and the converter is soldered to the test board with thermal relieves.

option is 0.50". The use of an additional heatsink or cold-plate can further improve the thermal performance of the converter. With the baseplate option, a standard quarter-brick heatsink can be attached to the converter using M3 screws.

For reliable operation, the baseplate temperature should not continuously exceed 100 °C.

Note that the natural convection condition was measured at 0.05 m/s to 0.15 m/s (10ft./min. to 30 ft./min).

EMC Considerations

Heat Transfer without a Baseplate

The EMC performance of the converter is related to the layout and filtering design of the customer board. Careful layout and adequate filtering around the converter are important to confine noise generated by the switching actions in the converter and to optimize system EMC performance.

With single-board DC/DC converter designs, convection heat transfer is the primary cooling means for converters without a baseplate. Therefore, airflow speed should be checked carefully for the intended operating environment. Increasing the airflow over the converter enhances the heat transfer via convection.

Figure 16 shows a recommended temperature monitoring point for open frame modules. For reliable operation, the temperature at this location should not continuously exceed 120 °C.



Figure 16. Temperature Monitoring Location

Heat Transfer with a Baseplate

The SRS4 Series of converters have the options of using a baseplate for enhanced thermal performance.

The typical height of the converter with the baseplate



Mechanical Information

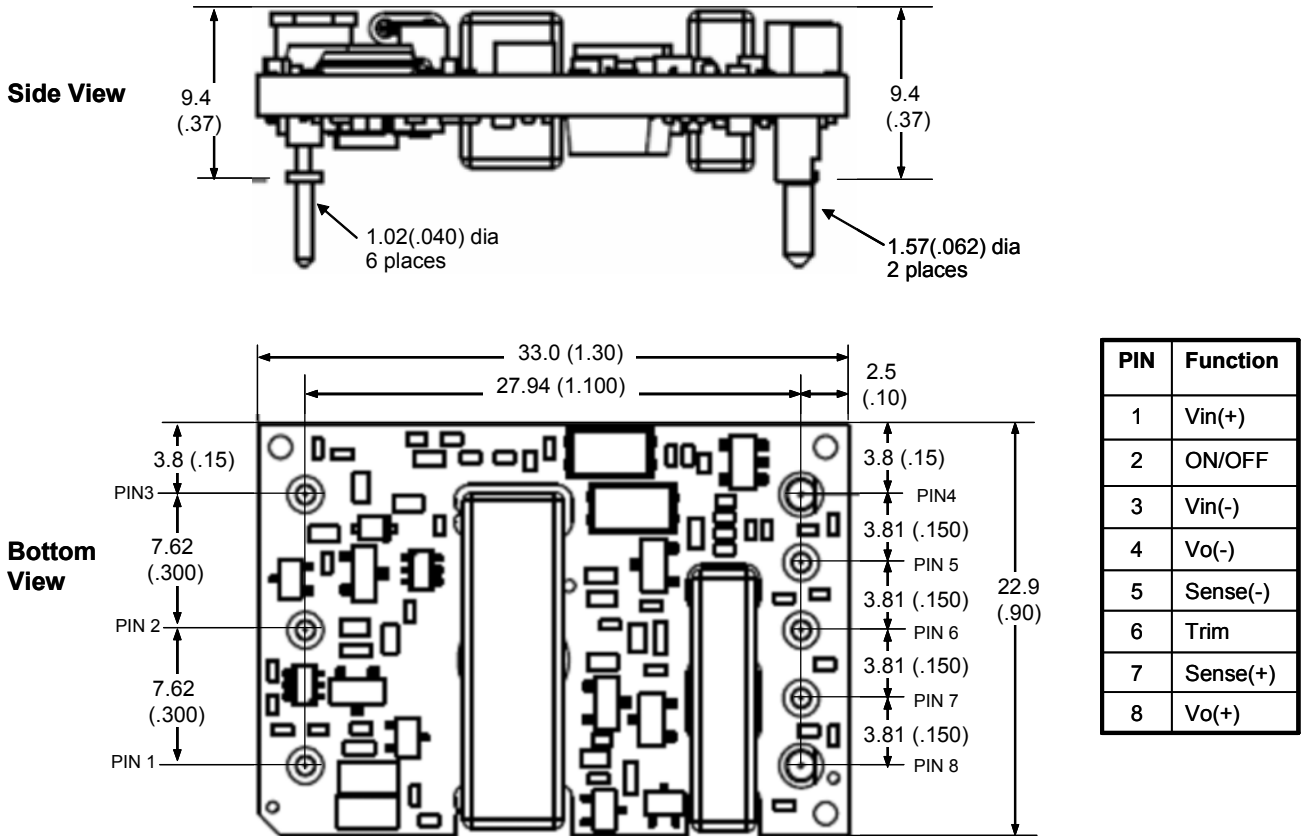


Figure 17. Open Frame Converter

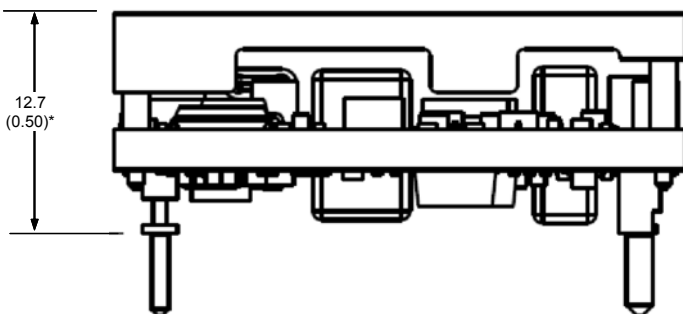


Figure 18. Converter with a Baseplate

Notes:

- 1) All dimensions in mm (inches)
Tolerances: $x \pm .5$ (.xx \pm 0.02)
 $.xx \pm .25$ (.xxx \pm 0.010)
- 2) Input and function pins are 1.02mm (0.040") dia. with \pm 0.10mm (0.004") tolerance; the standoff shoulders are 2.00mm (0.078") dia. with \pm 0.15mm (0.006") tolerance.
- 3) Output pins are 1.57 mm (0.062") dia. with \pm 0.10mm (0.004") tolerance; the standoff shoulders are 2.46mm (0.097") dia. with \pm 0.15mm (0.006") tolerance.
- 4) All pins are coated with 90%/10% solder, Gold, or Matte Tin finish with Nickel underplating.
- 5) Weight: 15 g open frame converter
30 g baseplated converter
- 6) Workmanship meets or exceeds IPC-A-610 Class II
- 7) Torque applied on screw should not exceed 6in-lb. (0.7 Nm)
- 8) Baseplate flatness tolerance is 0.10mm (0.004") TIR for surface



Part Numbering System

SRS	4	050	N	012	N	2	5	
Series Name:	Nominal Input Voltage:	Nominal Output Voltage:	Enabling Logic:	Rated Output Current:	Pin Length:	Electrical Options:	Mechanical Options	
							Lead-free, ROHS Compliant	Leaded (ROHS-5 Compliant)
SRS	4: 48Vin	Unit: 0.1V 050 =5V	P: Positive N: Negative	Unit: A 012 = 12A	K: 0.110" N: 0.145" R: 0.180" S: SMT*	0: None 2: Auto Restart	5: None 6: Baseplate	0: None 1: Baseplate

*: SMT pins are at the locations as the through-hole pins. The recommended diameter for pad/stencil opening and solder mask opening for the SMT pins is 0.12”.

Part Numbering Example: SRS4050N012N25

The above example denotes a sixteenth brick converter that features 36-75V input, 5V/12A output, negative enabling logic, 0.145” pin length, auto restart, lead-free, and open frame.

For more information, please contact:

NetPower Technologies, Inc.
Toll Free: 866-NETPOWER (638-7693)
Local Phone: 972-560-0500
Fax: 972-560-0210
E-mail: sales@netpowercorp.com
www.netpowercorp.com
Address: 1680 Prospect Drive #200, Richardson, TX75081

Warranty

NetPower offers a two (2) year limited warranty. Complete warranty information is listed on our web site or is available upon request. Information furnished by NetPower is believed to be accurate and reliable. However, no responsibility is assumed by NetPower for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of NetPower.