

Peak Sensitivity Wavelength: 905nm

The MTAPD-06-xxx is a circular ($\Phi 500\mu\text{m}$) .2 mm² active area Avalanche Photodiode with optimized sensitivity at 905 nm & housed in a hermetic TO-46 metal can package. It is well suited for applications requiring High Speed & Low Noise in visible-near IR applications.


FEATURES

- >Fast Rise Time
- >Ultra Low Noise
- >Low Capacitance
- >High Gain
- >Optimum Gain M100

- >Operating Voltages:
120v - 160v, 160v - 200v
Other Voltages Available
- >Optional Filters Available *2

APPLICATIONS

- >Optical rangefinders
- >High speed optical communications
- >Medical Equipment
- >Bar Code Readers

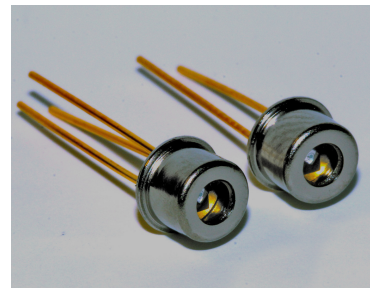

Absolute Maximum Ratings



ITEMS	SYMBOL	RATINGS	UNIT
Storage Temperature	Tstg	-55 ~ +125	°C
Operating Temperature	Topr	-20 ~ +85	°C
Power Dissipation	Pd	1	mw
Forward Current	If	1	mA
Operating Voltage	Vop	0.95 x Vbr	V
Lead Soldering Temperature *1	Tls	260	°C

*1: Time 10 Sec max

Electrical & Optical Characteristics (Ta=23°C)



ITEMS	SYMBOL	CONDITIONS	MIN.	TYP	MAX.	UNIT
Spectral Response	λ	--		400 - 1100		nm
Active Area		--		Diameter 500		um
Responsivity	Re	$\lambda=905\text{nm}$, oe=1uW, M=100	50	55	--	A/W
Rise Time	tR	f=1MHz, RL=50Ω, $\lambda=905\text{nm}$	--	0.6	--	ns
Dark Current	Id	M=100	0.1	0.4	1.0	nA
Capacitance	Cj	M=100, f=1MHz		1.2		pF
Optimal Gain	M	--		100		
Breakdown Voltage	Vbr	IR=2uA	80	--	200	V
Temperature Coefficient		Tc=-40°C - 85°C		0.9		V/°C

Note *2: When ordering photodiode with filter, specify -905F (ex. MTAPD-06-XXX-905F)

TO-46 Package Dimensions (2 Pin)

MTAPD-06-013 V_{br}=120-160V

MTAPD-06-014 V_{br}=160-200V


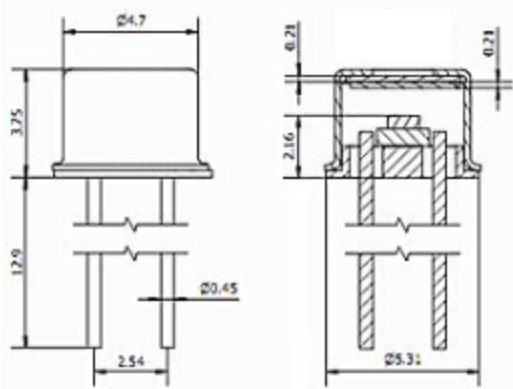


Unit: mm, Tolerance: ± 0.2

TO-46 Package Dimensions (3 Pin)

MTAPD-06-015 V_{br}=120-160V

MTAPD-06-016 V_{br}=160-200V

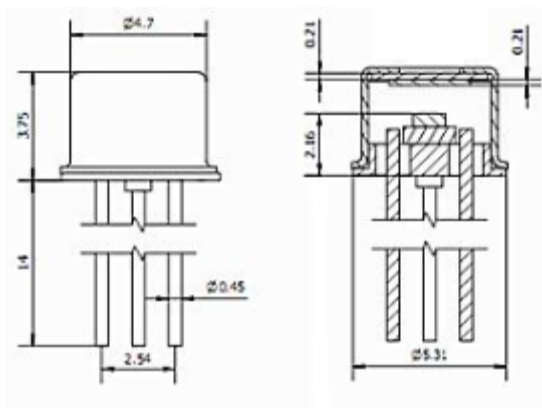

Unit: mm, Tolerance: ± 0.2

Fig 1 Responsivity, $V_r=0V$

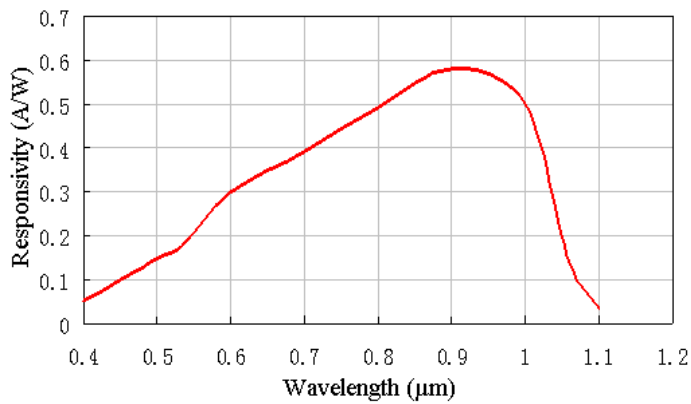


Fig 2 Dark Current

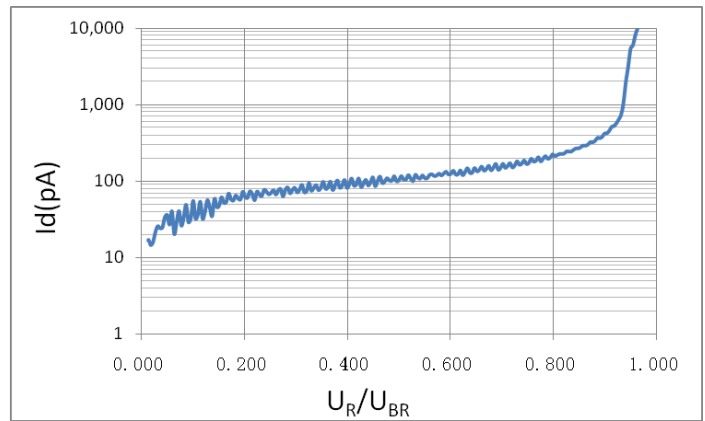


Fig 3 Multiplication

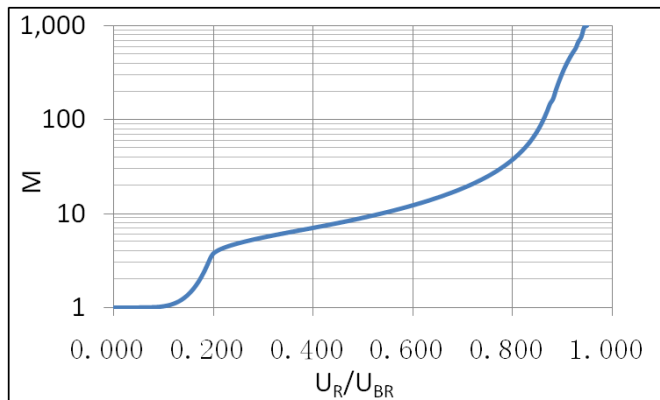


Fig 4 Capacitance



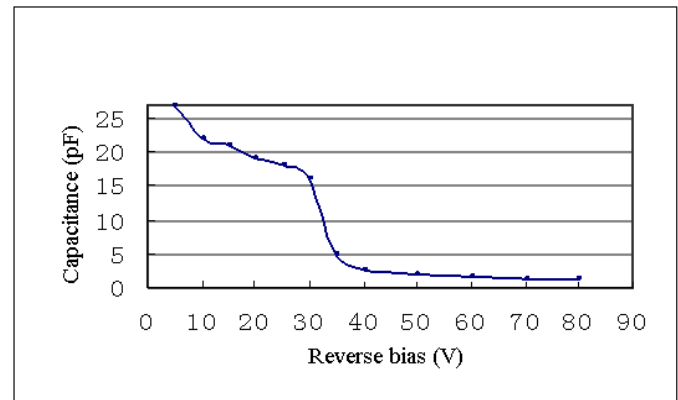


Fig 5 Responsivity,
905nm Optional Filter, M=10

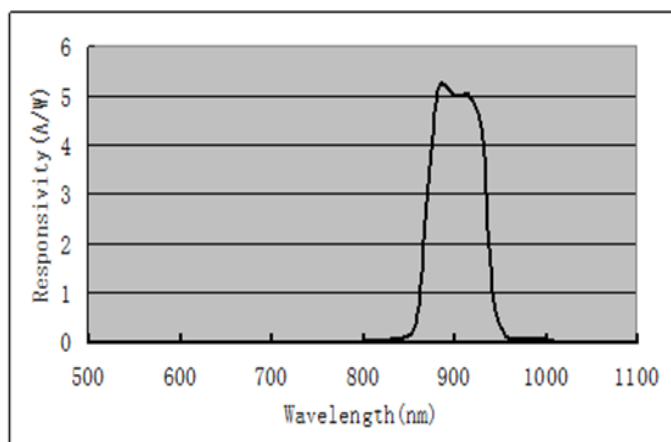


Applications Diagram

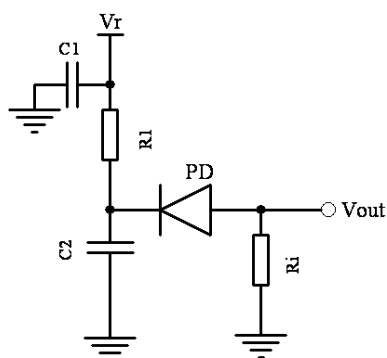

- Notes: C1 - Filter capacitor, filter noise from Vr.
 C2 - bypass capacitor, the loop to ground for AC signal.
 R1 - current-limiting resistor, protect APD from higher voltage.
 Ri - sampling resistor, convert the current signal into a voltage signal.

Equivalent Circuit Diagram

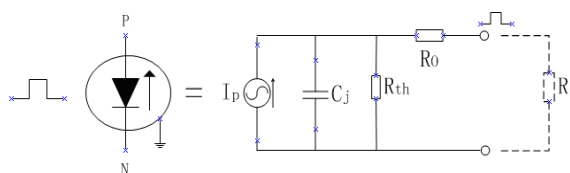

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Marktech Optoelectronics:](#)

[MTAPD-06-013](#)