




AEC-Q200

This component was always RoHS compliant from the first date of manufacture.

**RF3417E-1**

**314.90 MHz  
SAW Filter**

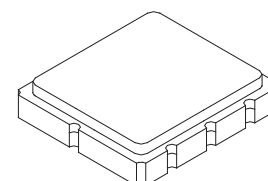

**SM3030-6 Case  
3.0 x 3.0**

- **Ideal Front-End Filter for Low Power Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Tape and Reel Standard per ANSI/EIA-481**

The RF3417E-1 is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 314.90 MHz receivers. Receiver designs using this filter include super-heterodynes with 10.7 MHz or 500 kHz IFs, direct conversions and superregeneratives. Typical applications for these receivers include wireless remote control and security devices.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFMi's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included).

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency @ 25°C	f <sub>C</sub>		314.800	314.900	315.000	MHz
Insertion Loss	IL			1.8	2.5	dB
3 dB Bandwidth	BW <sub>3</sub>		525	600	675	kHz
1 dB Bandwidth	BW <sub>1</sub>			450		kHz
Rejection	10 - 275 MHz		40	60		dB
	275 - 306 MHz		40	45		
	306 - 313.2 MHz		25	30		
	313.2 - 314.2 MHz		7	15		
	315.8 - 317 MHz		12	15		
	317 - 321.8 MHz		25	30		
	321.8 - 326 MHz		12	17		
	326 - 355 MHz		37	45		
	355 - 1000 MHz		50	55		
Temperature Freq. Temp. Coefficient	FTC			0.032		ppm/°C <sup>2</sup>
Turnover Temperature	To		10		40	°C
Frequency Aging	Absolute Value during the First Year	fA		<±10		ppm/yr
Impedance @ f <sub>C</sub>	Input Z <sub>IN</sub> = R <sub>IN</sub> /C <sub>IN</sub>	Z <sub>IN</sub>		3.7kΩ // 2.03pF		
	Output Z <sub>OUT</sub> = R <sub>OUT</sub> /C <sub>OUT</sub>	Z <sub>OUT</sub>		5.4kΩ // 2.17pF		
Lid Symbolization (in addition to Lot and/or Date Codes)		922, YWWS				
Standard Reel Quantity	7 Inch Reel		500 Pieces/Reel			
Standard Reel Quantity	13 Inch Reel		3000 Pieces/Reel			




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**




**NOTES:**

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.

## Wideband Filter Plots

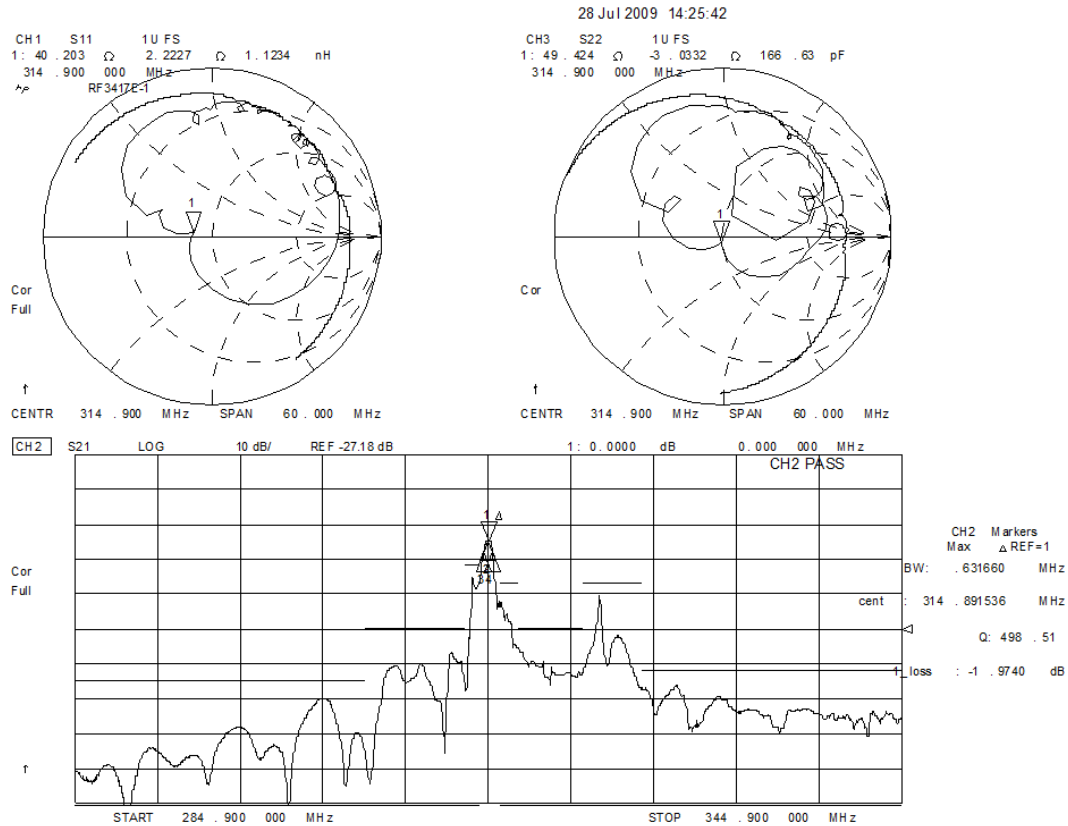

## Narrowband Filter Plots

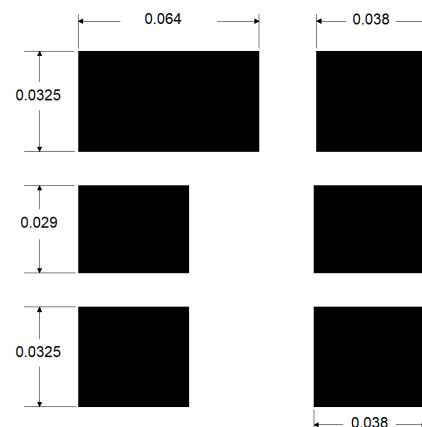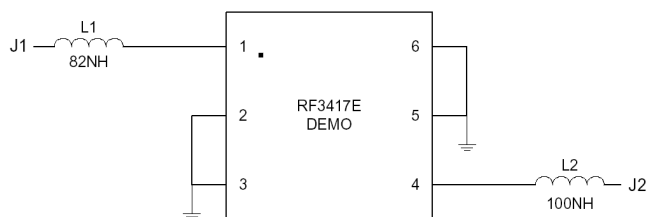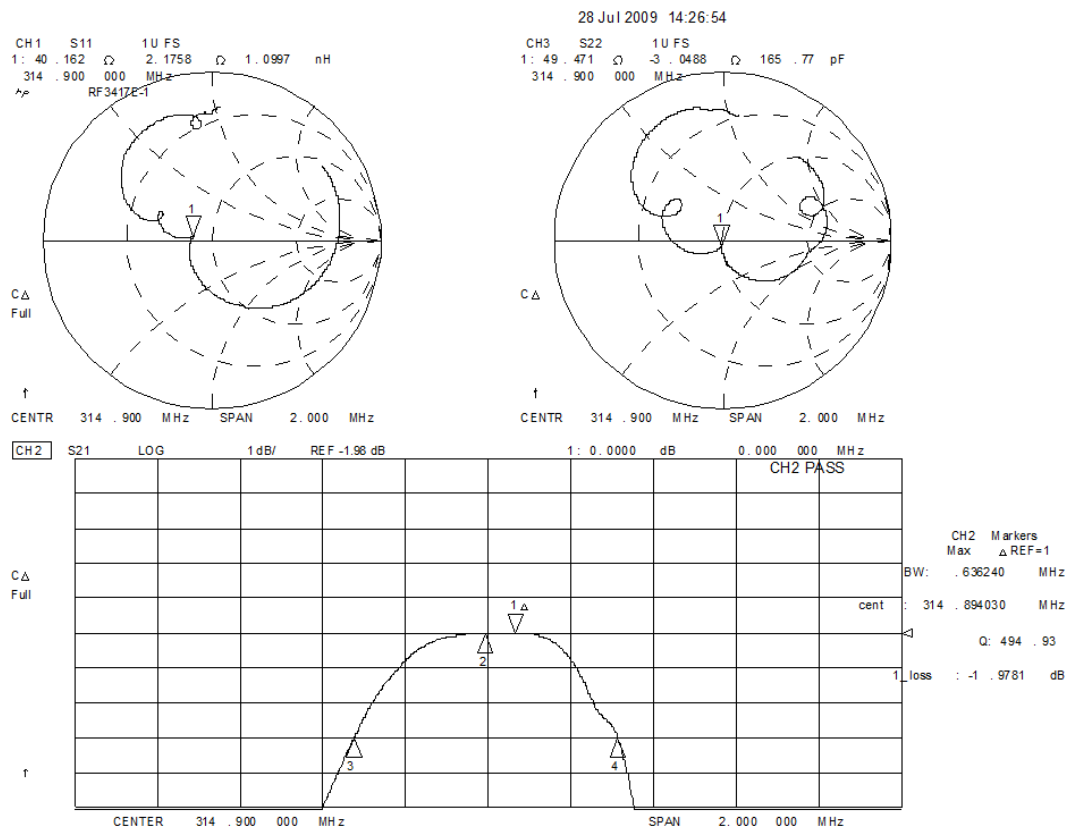


PCB Pad Layout in Inches

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-55 to +125	°C
Operable Temperature Range	-40 to +125	°C
Soldering Temperature	(10 seconds / 5 cycles maximum)	260 °C


### Electrical Connections

Pin	Connection
1	Input Ground
2	Input
3	Ground
4	Output Ground
5	Output
6	Ground

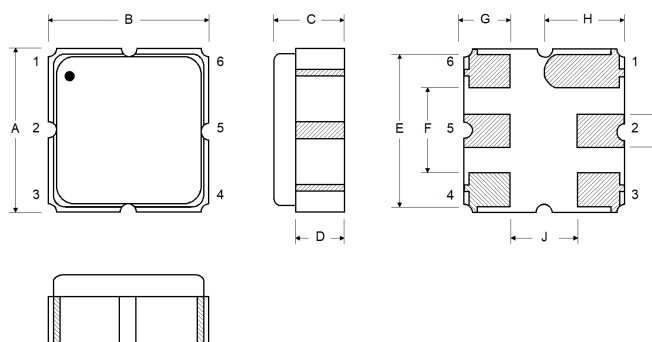

### Case Dimensions

### Matching Circuit to 50Ω

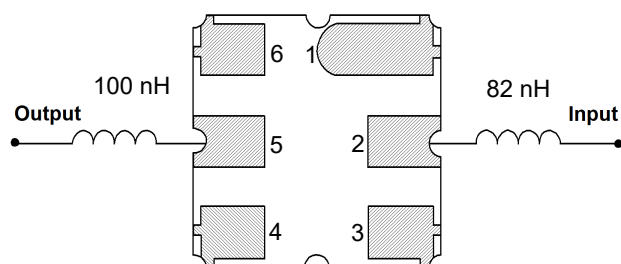


Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	2.87	3.0	3.13	0.113	0.118	0.123
B	2.87	3.0	3.13	0.113	0.118	0.123
C	1.12	1.25	1.38	0.044	0.049	0.054
D	0.77	0.90	1.03	0.030	0.035	0.040
E	2.67	2.80	2.93	0.105	0.110	0.115
F	1.47	1.6	1.73	0.058	0.063	0.068
G	0.72	0.85	0.98	0.028	0.033	0.038
H	1.37	1.5	1.63	0.054	0.059	0.064
I	0.47	0.60	0.73	0.019	0.024	0.029
J	1.17	1.30	1.43	0.046	0.051	0.056

### Optional Electrical Connections


Pin	Connection
1	Input
2	Input Ground
3	Ground
4	Output
5	Output Ground
6	Ground

### Matching Circuit to 50Ω

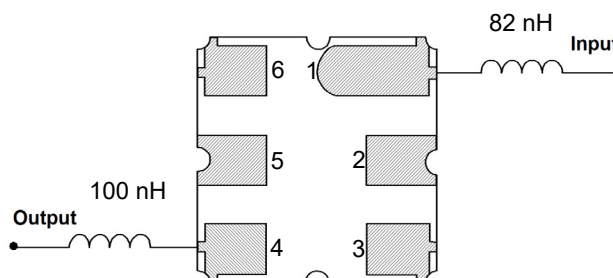

## Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

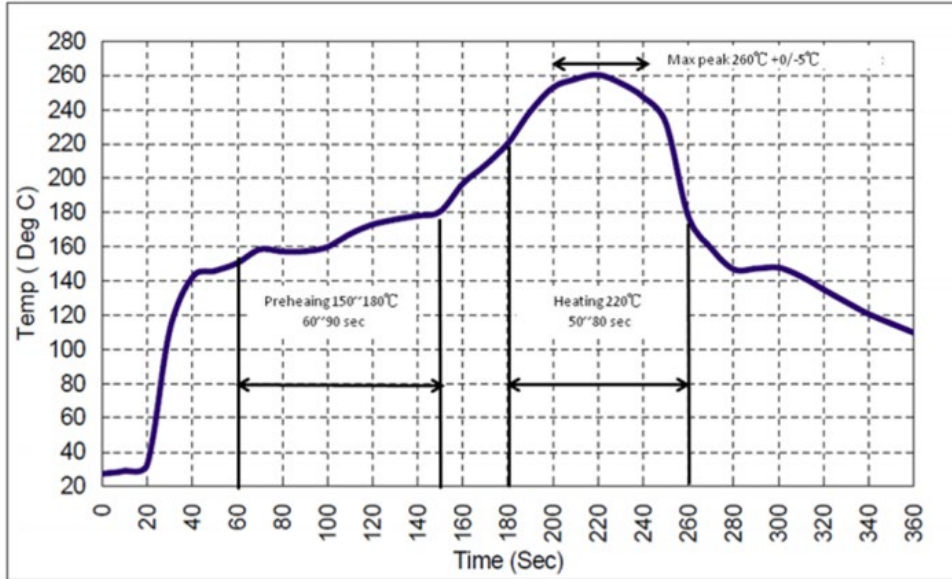

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RFMi:](#)

[RF3417E-1](#)