

SR26 Series

Application

- ✓ TV/Video, Audio, Home appliance, Precision apparatus,
Automotive, Musical instruments, Industrial control, Others

Feature

- ✓ Up to 12 positions general use rotary switches with optional plastic shafts.



■Specification

Rating	125V AC 0.3A
Withstand Voltage	500V AC - 1 minute
Contact Resistance	50 mΩ Max.
Insulation Resistance	500V DC - 100MΩ Min.
Rotational Torque	0.5 ± 0.2 kgf.cm
Operating Life Cycle	10,000 cycles

■How to order

SR2612F – 0102 – 15F5B – D8 – S

[Model](#)

Number of Pole & Position
Ex. 0102 – 1 pole 2 positions
0402 – 4 poles 2 positions

[Shaft Type](#)

Timing

Order Code	Description
S	Shorting (make-before-break)
N	Non-shorting (break-before-make)

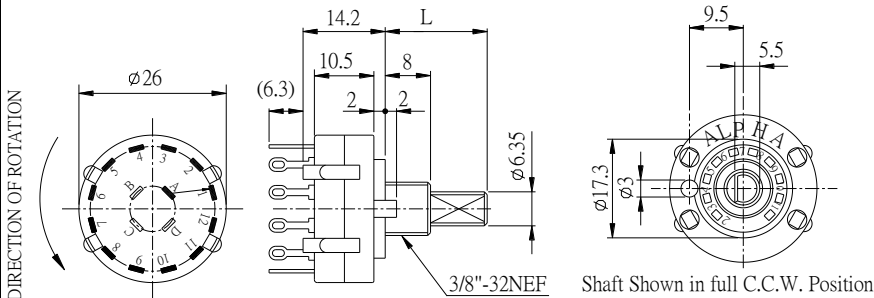
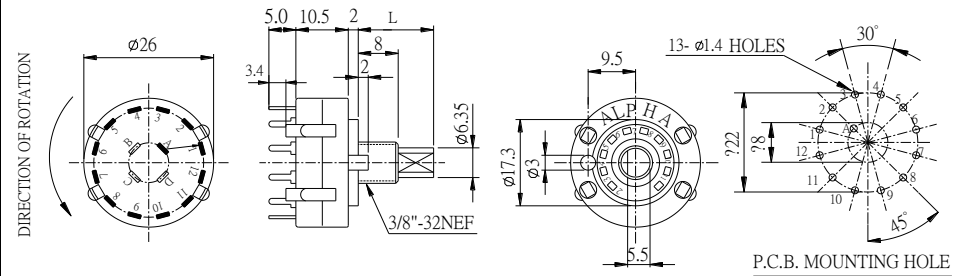
Bushing Type

Order Code	Bushing Length	Bushing Diameter
D1	8mm	M10*0.75
D8	8mm	3/8"- 32NEF

SR26 Series

Model Description

Model	Terminal Type	Pole	Position	Changeover Angle	Timing
SR2611F	Soldering	1	2~12	30°	Shorting/ Non-shorting
		2	2~6		
		4	2~3		
SR2612F	PCB	1	2~12		
		2	2~6		
		3	2~4		
		4	2~3		

Order Code	Outline Drawing
SR2611F-□□-(L)F5B-D8-S 	 Shaft Shown in full C.C.W. Position
SR2612F-□□-(L)F5B-D8-S 	 P.C.B. MOUNTING HOLE

[Back to top](#)

ALPHA

■ Shaft Type

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

TAIWAN ALPHA ELECTRONIC CO., LTD.
Contact: sales@taiwanalpha.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Alpha \(Taiwan\):](#)

[SR2612F-0403-18F5B-D8-N](#) [SR2612F-0108-16F5A-D8-N](#) [SR2612F-0206-16F5A-D8-N](#) [SR2612F-0304-16F5A-D8-N](#)