SIEMENS

Data sheet

US2:LCE01C206208A

Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 2 N.C. / 6 N.O. poles, 200-208V 60Hz coil, Non-combination type, Enclosure NEMA type 1, Indoor general purpose use



product brand name Class LC design of the product Electrically held lighting contactor (convertible to mechanically held; special product feature Electrically held convertible to mechanically held; Power poles convertible between NO and NC General technical data		
special product feature Electrically held convertible between NO and NC General technical data ************************************	product brand name	Class LC
Between NO and NC Ceneral technical data weight [b] 11 lb Height x Width x Depth [in] 14 x 8 x 7 in touch protection against electrical shock NA for enclosed products installation atlifted [ft] at height above sea level maximum 6560 ft ambient temperature ['F] - • during storage -22 +149 'F • during storage -30 +65 'C • during storage -30 +65 'C • during storage -30 +65 'C • during operation -25 +40 'F size of contactor 30 Amp number of NC contacts for main contacts 6 number of NC contacts for main contacts 2 operating vollage for main contacts 5 operating vollage for main contacts 100000 Type of main contacts 5liver alloy, double break mechanical service life (operating crycles) of the main contacts 100000 velith electronic balast (LEO driver] (1 pole per 1 phase) 10A @2277V 1p 1ph radd value 20A @277V 1p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @2077V 1p 1ph	design of the product	Electrically held lighting contactor (convertible to mechanically held)
weight [b] 11 lb Height X Widh x Depth [in] 14 + 8 × 7 in touch protection against electrical shock NA for enclosed products installation altitude [If at height above sea level maximum 6560 ft ambient temperature [F] -22 +149 °F • during storage -22 +140 °F • during operation -13 +104 °F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 6 number of NC contacts for main contacts 6 operating voltage for main contacts 1000 V maximum 600 V Type of main contacts 100000 operating voltage for main contacts 100000 vybical 10000 contact rating of the main contacts 100000 with electronic ballast [LED driver] (1 pole per 1 phase) 104 @220V / 3A @277V 1p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rate	special product feature	
Height X Width x Depth [in] 14 x 8 x 7 in touch protection against electrical shock NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature [FF] -22 +149 °F • during operation -13 +104 °F ambient temperature -13 +104 °F • during operation -25 +40 °C ocontactor 30 Amp number of NO contacts for main contacts 6 number of NO contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Type of main contacts 100000 typical 100000 contact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated va	General technical data	
toch protection against electrical shock NA for enclosed products installation altitude [I] at height above sea level maximum 6560 ft ambient temperature [°F] - • during storage -22 +149 °F • during operation -13 +104 °F ambient temperature - • during operation -23 +40 °C country of origin USA Contactor 30 Amp size of contacts for main contacts 6 number of NC contacts for main contacts 6 number of NC contacts for main contacts 6 reacting voltage for main current circuit at AC at 60 Hz 500 V maximum 100000 Type of main contacts 5ilver alloy, double break mothanical service life (operating cycles) of the main contacts 100000 vith electronic ballast (LED driver] (1 pole per 1 phase) 104 @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 20A @400V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated v	weight [lb]	11 lb
installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature [°F] -22 +149 °F • during operation -13 +104 °F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 6 number of NC contacts for main contacts 6 number of NC contacts for main contacts 600 V maximum 6000 V Type of main contacts 9 operating voltage for main current circuit at AC at 60 Hz 50000 maximum 100000 Type of main contacts 9 ortact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 30A @6000V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @6000V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @6000V 2p 1ph • at ballast (2 poles per 1 phase) rated value	Height x Width x Depth [in]	14 × 8 × 7 in
ambient temperature [*F] -22 +149 *F • during storage -23 +104 *F ambient temperature -13 +104 *F • during operation -25 +40 *C • during operation -25 +40 *C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 6 number of NC contacts for main contacts 6 operating voltage for main contacts 6 operating voltage for main contacts 1000 V maximum Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 100000 contact rating of the main contacts 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase)	touch protection against electrical shock	NA for enclosed products
• during storage -22 +149 °F • during operation -13 +104 °F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp size of contactor 6 number of NC contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V Type of main contacts Silver alloy, double break Type of main contacts 100000 typical 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (3 poles per 3 phases) rated value 20A @480V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2	installation altitude [ft] at height above sea level maximum	6560 ft
• during operation -13 +104 "F ambient temperature -30 +65 "C • during operation -25 +40 "C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Type of main contacts 100000 Type of main contacts 100000 voltage training optical service life (operating cycles) of the main contacts 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @2480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph	ambient temperature [°F]	
ambient temperature -30 +65 °C • during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Size of contactor 30 Amp number of NO contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 50000 Type of main contacts Silver alloy, double break reacting of the main contacts 100000 vprating outlage for main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph contact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph e at tungsten (1 pole per 1 phase) rated value 20A @480V 3p 3ph e at tungsten (2 poles per 3 phases) rated value 20A @480V 3p 3ph e at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph e at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at	during storage	-22 +149 °F
• during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 500 V Type of main current circuit at AC at 60 Hz 600 V maximum 100000 Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 voltage for bighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 3ph • at tungsten (3 poles per 3 phases) rated value 20A @480V 2p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phasese) rated value 30A @600V 2p	during operation	-13 +104 °F
• during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 5ilver alloy, double break Type of main contacts 5ilver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 10000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (3 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 2p 1ph <	ambient temperature	
country of origin USA Contactor 30 Amp number of NO contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 5liver alloy, double break Type of main contacts Silver alloy, double break rechanical service life (operating cycles) of the main contacts 100000 typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph <td< td=""><td>during storage</td><td>-30 +65 °C</td></td<>	during storage	-30 +65 °C
Size of contactor 30 Amp number of NO contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts 900 V reading voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vipical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value </td <td>during operation</td> <td>-25 +40 °C</td>	during operation	-25 +40 °C
size of contactor 30 Amp number of NO contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 7ype of main contacts 5ilver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) • at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at tesistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at r	country of origin	USA
number of NO contacts for main contacts 6 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Silver alloy, double break Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 10000 contact rating of the main contacts of lighting contactor 00 (Mage 277V 1p 1ph) e at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph e at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph e at tungsten (2 poles per 3 phases) rated value 20A @480V 2p 1ph e at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph e at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at tesistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph e at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph e at resistive load (2 poles per 1 phase) rated value 30A	Contactor	
number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) • at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (3 poles per 3 phases) rated value 20A @347V 1p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) ra	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) 	number of NO contacts for main contacts	6
maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 pha	number of NC contacts for main contacts	2
mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (6 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (6 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (6 poles per 3 phase		600 V
typicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (3 poles per 3 phases) rated value• at ballast (1 pole per 1 phase) rated value• at ballast (1 pole per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (3 poles per 3 phases) rated value• at ballast (3 poles per 3 phases) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value<	Type of main contacts	Silver alloy, double break
• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at mumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0		100000
rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 1p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• number of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0	contact rating of the main contacts of lighting contactor	
• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (6 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (8 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (9 poles per 3 phases)• at resistive load (9 poles per 3 phases)• at resistive load		10A @120V / 3A @277V 1p 1ph
• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (6 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (7 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (8 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (9 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (9 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (9 pole	 at tungsten (1 pole per 1 phase) rated value 	20A @277V 1p 1ph
• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (2 poles per 1 phase) rated value 	20A @480V 2p 1ph
 at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive pole (3 poles per 3 phases) rated value at resistive (3 pole (3 poles per 3 phases) rated value at resistive (3 pole (3 pole (3 pole (3 pole (3 pole (3 pole (3 pole	 at tungsten (3 poles per 3 phases) rated value 	20A @480V 3p 3ph
• at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (1 pole per 1 phase) rated value 	30A @347V 1p 1ph
• at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
• at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
• at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (1 pole per 1 phase) rated value 	30A @600V 1p 1ph
Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph
number of NO contacts for auxiliary contacts 0	Auxiliary contact	
	number of NC contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of NO contacts for auxiliary contacts	0
	number of total auxiliary contacts maximum	4

contact rating of auxiliary contacts of contactor according to UL	NA	
Coil		
	AC	
type of voltage of the control supply voltage	AC	
control supply voltage		
at AC at 60 Hz rated value	200 208 V	
apparent pick-up power of magnet coil at AC	248 VA	
apparent holding power of magnet coil at AC	28 VA	
operating range factor control supply voltage rated value of magnet coil	0.85 1.1	
Enclosure		
degree of protection NEMA rating of the enclosure	NEMA Type 1	
design of the housing	indoors, usable on a general basis	
Mounting/wiring		
mounting position	Vertical	
fastening method	Surface mounting and installation	
type of electrical connection for supply voltage line-side	Screw-type terminals	
tightening torque [lbf·in] for supply	35 35 lbf·in	
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)	
temperature of the conductor for supply maximum permissible	75 °C	
material of the conductor for supply	CU	
type of electrical connection for load-side outgoing feeder	Screw-type terminals	
tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf in	
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)	
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C	
material of the conductor for load-side outgoing feeder	CU	
type of electrical connection of magnet coil	Screw-type terminals	
tightening torque [lbf·in] at magnet coil	15 15 lbf·in	
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)	
temperature of the conductor at magnet coil maximum permissible	75 °C	
material of the conductor at magnet coil	CU	
Short-circuit current rating		
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)	
design of the short-circuit trip	Thermal magnetic circuit breaker	
maximum short-circuit current breaking capacity (Icu)		
• at 240 V	24 kA	
• at 480 V	65 kA	
● at 600 V	25 kA	
certificate of suitability	NEMA ICS 2; UL 508	
Further information		

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE01C206208A


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/US/en/ps/US2:LCE01C206208A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LCE01C206208A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE01C206208A/certificate

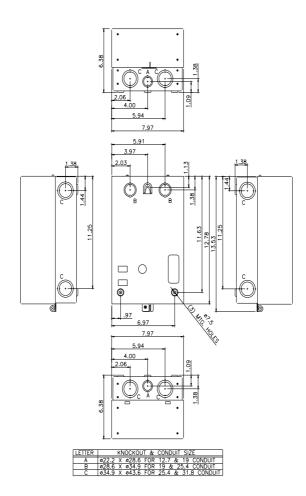

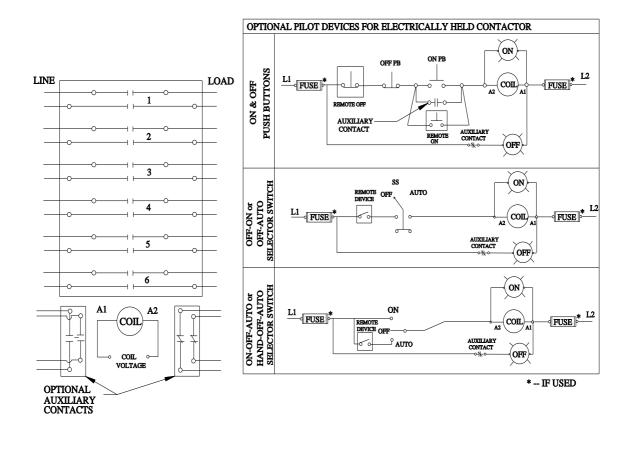

D38297001

last modified:

4/5/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: LCE01C206208A