## SIEMENS

## Data sheet

## 3RA2115-4AA18-1AP6



Fuseless motor starter Direct start 600VAC Size S00 11-16Amp 220/240VAC 50/60HZ screw connection For screw mounting Or 35 mm rail-mounting Type of coordination 1 1NO+1NC (MSP) 1NO (contactor)

product brand name	SIRIUS				
product designation	non-fused motor starter 3RA2				
design of the product	direct starter				
manufacturer's article number					
<ul> <li>of the supplied contactor</li> </ul>	<u>3RT2018-1AP61</u>				
<ul> <li>of the supplied circuit-breakers</li> </ul>	<u>3RV2011-4AA15</u>				
<ul> <li>of the supplied link module</li> </ul>	<u>3RA1921-1DA00</u>				
General technical data					
size of the circuit-breaker	S00				
size of load feeder	S00				
product extension auxiliary switch	Yes				
insulation voltage with degree of pollution 3 at AC rated value	690 V				
degree of pollution	3				
surge voltage resistance rated value	6 kV				
shock resistance according to IEC 60068-2-27	6g / 11 ms				
mechanical service life (operating cycles) of contactor typical	30 000 000				
type of assignment	1				
Weight	0.58 kg				
Ambient conditions					
ambient temperature					
<ul> <li>during operation</li> </ul>	-20 +60 °C				
during storage	-50 +80 °C				
<ul> <li>during transport</li> </ul>	-55 +80 °C				
Main circuit					
number of poles for main current circuit	3				
design of the switching contact	electromechanical				
adjustable current response value current of the current- dependent overload release	11 16 A				
operating voltage					
rated value	690 V				
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V				
operating frequency rated value	50 60 Hz				
operational current at AC-3 at 400 V rated value	15.5 A				
operating power at AC-3					
• at 400 V rated value	7 500 W				
• at 500 V rated value	7 500 W				
Control circuit/ Control					
control supply voltage at AC					
• at 50 Hz rated value	220 V				
• at 50 Hz rated value	187 242 V				

a at 60 Hz rated value	240.1/
<ul> <li>at 60 Hz rated value</li> <li>at 60 Hz rated value</li> </ul>	240 V 192 264 V
apparent holding power of magnet coil at AC	6.5 VA
inductive power factor with the holding power of the coil	0.25
Auxiliary circuit	4
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	2
Protective and monitoring functions	01.400.40
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip unit	208 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	14 A
at 600 V rated value	11 A
yielded mechanical performance [hp]	
for single-phase AC motor	
— at 110/120 V rated value	1 hp
— at 230 V rated value	2 hp
for 3-phase AC motor	2 hz
- at 200/208 V rated value	3 hp
— at 220/230 V rated value	5 hp
- at 460/480 V rated value	10 hp
— at 575/600 V rated value	10 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
• at 400 V according to IEC 60947-4-1 rated value	153 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	Snap-mounted to DIN rail or screw-mounted with additional push-in lug
fastening method height	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm
fastening method height width	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm
fastening method height width depth	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm
fastening method height width depth required spacing	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm
fastening method height width depth required spacing • for grounded parts	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm
fastening method height width depth required spacing • for grounded parts — forwards — backwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         • bor live parts         — backwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — upwards         • for live parts         — upwards         — upwards         — upwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 0 mm 0 mm 20 mm 20 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         — forwards         — downwards         — forwards         — downwards         — downwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 20 mm 20 mm 10 mm 10 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — downwards         — backwards         — at the side         — downwards         — at the side         — upwards         — at the side         — upwards         — at the side	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 0 mm 0 mm 20 mm 20 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — at the side         — downwards         — backwards         — upwards         — at the side         — downwards         — at the side         — commards         — at the side         Connections/ Terminals	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 9 mm 10 mm 9 mm 20 mm 9 mm 10 mm 9 mm 10 mm 9 mm
fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — backwards — upwards — at the side — downwards — the side — downwards — at the side — downwards — at the side — upwards — uppwards — upwards — upwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 10 mm 0 mm 20 mm 10 mm 20 mm 10 mm 20 mm 10 mm 20 mm 10 mm 20 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — downwards         • for live parts         — forwards         — upwards         — upwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections for main contacts stranded	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 9 mm 10 mm 20 mm 10 mm 20 mm 20 mm 10 mm 20
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections for main contacts stranded         connectable conductor cross-section for main contacts finely stranded with core end processing	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 9 mm 10 mm 9 mm 20 mm 10 mm 9 mm 10 mm 20 mm 10 mm
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — backwards         — backwards         — upwards         — downwards         — at the side         — otownwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections for main contacts stranded         connectable conductor cross-section for main contacts finely stranded with core end processing         Safety related data	Shap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 screw-type terminals 0.5 4 mm <sup>2</sup> , 2x (0.75 2.5 mm <sup>2</sup> ) 0.5 2.5 mm <sup>2</sup>
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections for main contacts stranded         connectable conductor cross-section for main contacts finely stranded with core end processing	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 9 mm 10 mm 20 mm 10 mm 20 mm 20 mm 10 mm 20
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — ownwards         • for live parts         — forwards         — backwards         — upwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections for main contacts stranded         connectable conductor cross-section for main contacts finely stranded with core end processing         Safety related data         proportion of dangerous failures with high demand rate	Shap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 0 mm 20 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 screw-type terminals 0.5 4 mm <sup>2</sup> , 2x (0.75 2.5 mm <sup>2</sup> ) 0.5 2.5 mm <sup>2</sup>
fastening method         height         width         depth         required spacing         • for grounded parts         — forwards         — backwards         — upwards         — at the side         — downwards         • for live parts         — forwards         — backwards         — upwards         — backwards         — upwards         — backwards         — upwards         — downwards         — at the side         Connections/ Terminals         type of electrical connection for main current circuit         type of connectable conductor cross-sections for main contacts stranded         connectable conductor cross-section for main contacts finely stranded with core end processing         Safety related data         proportion of dangerous failures with high demand rate according to SN 31920         B10 value with high demand rate according to SN 31920	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 167.2 mm 45 mm 97.1 mm 0 mm 0 mm 20 mm 9 mm 10 mm 0 mm 20 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 10 screw-type terminals 0.5 4 mm <sup>2</sup> , 2x (0.75 2.5 mm <sup>2</sup> ) 0.5 2.5 mm <sup>2</sup>

Approvals Certificates						
General Product App	roval				For use in hazard- ous locations	
CE EG-Konf.	UK CA	<u>Confirmation</u>	UL.	EHC	K ATEX	
Test Certificates		Marine / Shipping				
Type Test Certific- ates/Test Report	Special Test Certific- ate	ABS	BUREAU VERITAS		Llovd's Register urs	
Marine / Shipping			other	Railway	Environment	
PRS	RINA	RMRS RMRS	<u>Confirmation</u>	Special Test Certific- ate	Environmental Con- firmations	
Further information         Information on the packaging         https://support.industry.siemens.com/cs/ww/en/view/109813875         Information- and Downloadcenter (Catalogs, Brochures,)         https://www.siemens.com/ic10         Industry Mall (Online ordering system)         https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2115-4AA18-1AP6         Cax online generator         http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2115-4AA18-1AP6         Service&Support (Manuals, Certificates, Characteristics, FAQs,)						


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-4AA18-1AP6


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2115-4AA18-1AP6&lang=en Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2115-4AA18-1AP6/char


 Further characteristics (e.g. electrical endurance, switching frequency)

 http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2115-4AA18-1AP6&objecttype=14&gridview=view1

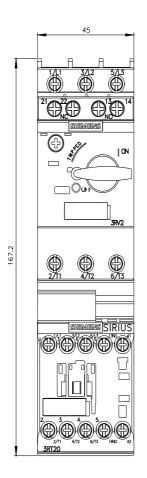

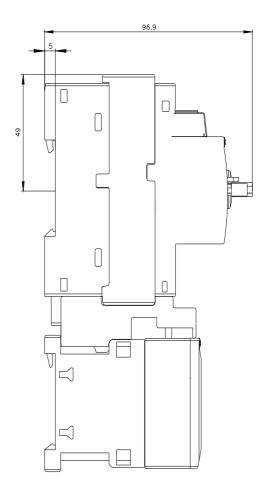

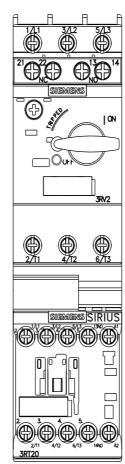

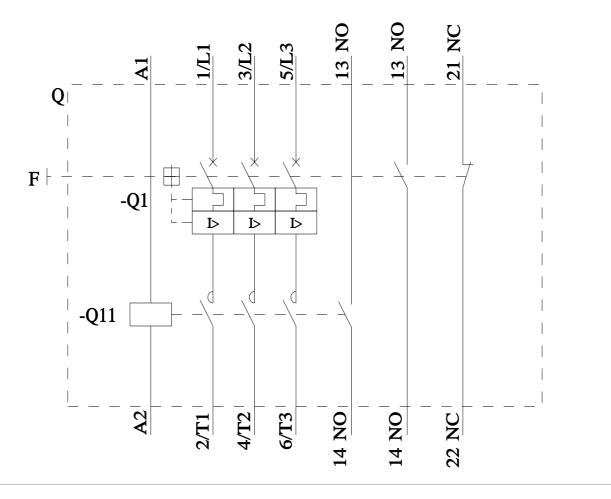

last modified:

12/15/2020 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA21154AA181AP6