

F

E

D

C

B

A

F

E



D

C

B

A



REVISIONS				
REV	DESCRIPTION		DATE	APPROVED
1	RELEASED PER E064265	PEI	02/02/06	ECF
2	REVISED PER E101188	KUK	09/24/10	AR

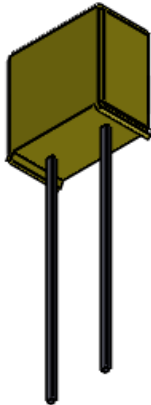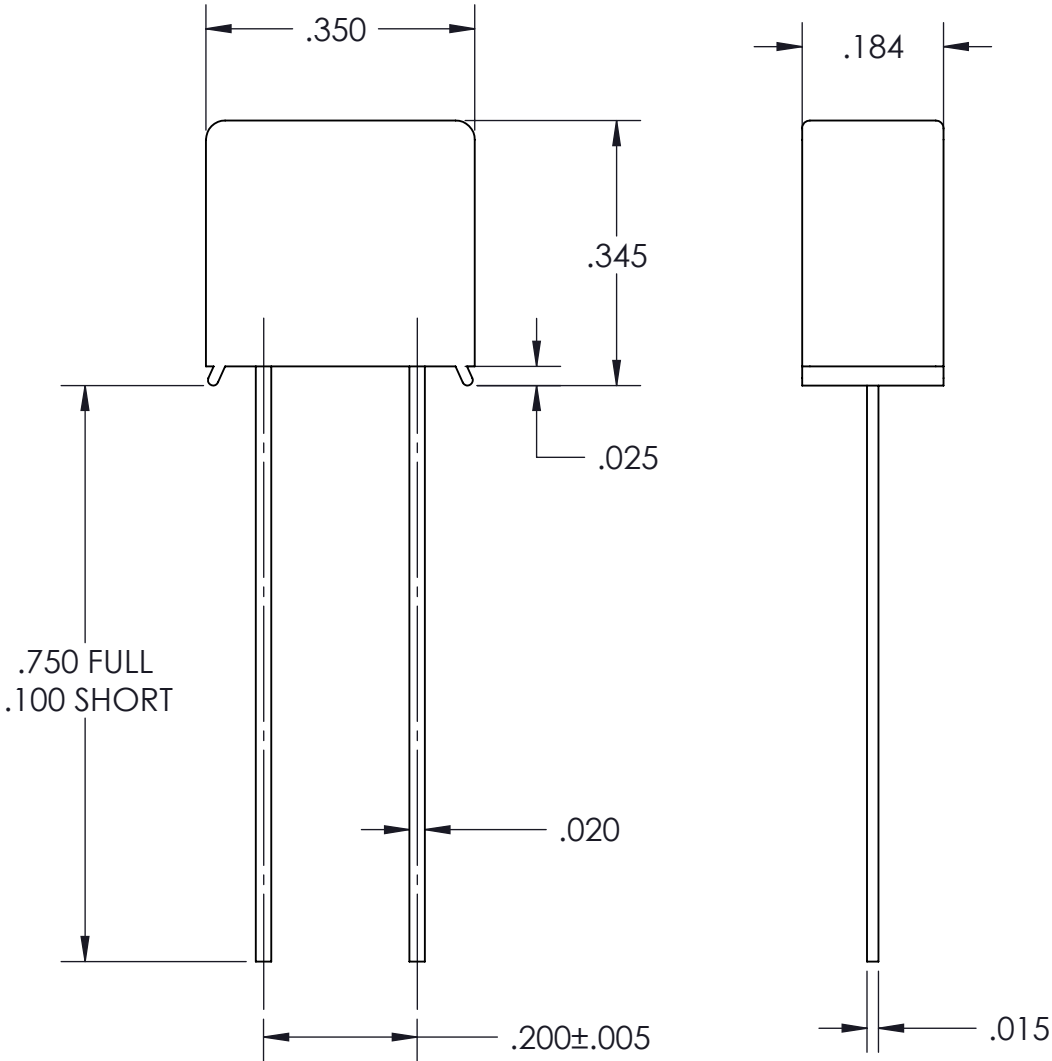

- NOTES:
- 1.) TIME CURRENT CHARACTERISTICS: CARRY 100% OF RATING FOR 4.0 HRS. MINIMUM, OPEN OF 200% OF RATING IN 10 SECONDS MAXIMUM. (NON-TIME DELAY).
 - 2.) AGENCY APPROVALS:
PCB, PCC, PCD, PDE, PCF, PCH & PCI. UL RECOGNIZED: FILE E19180.
GUIDE JDYX2. (PCC APPROVAL PENDING)
CSA CERTIFIED: FILE 42731, CLASS 1421-01.
PCG CERTIFICATION PENDING.
 - 3.) RATINGS 2.5 AMPS, 250 V.
 - 4.) COLD RESISTANCE DATA: (10% RATED CURRENT) NOMINAL VALUE 2.5 A - .10 .
 - 5.) RoHS COMPLIANT, LEAD FREE PER CST-0001 LATEST REVISION.

MARKING:
MFG. ID/PF CODE

MATERIAL
FINISH

DRAWN		DATE		<div> VICOR</div> <div>SWD</div>	
P.E.IENI		10/26/05		<div>FUSE 2.5A 250V</div> <div>BUSS PC-TRON</div>	
<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCH [MM] TOLERANCES ARE: DECIMALS ANGLES X.XX [X.X] = ±0.01 [0.25] ±1° X.XXX [X.XX] = ±0.005 [0.127]</div>					
THIRD ANGLE PROJECTION		SIZE	CAGE CODE	DWG NO	REV
<div></div>		B	67131	30772	2
DO NOT SCALE DRAWING		SCALE 4 : 1			SHEET 1 OF 1