SIEMENS

Data sheet

3RA2125-4BA26-0AK6



FUSELESS MOTOR STARTER DIRECT START 600V AC SZ S0 14-20A 110/120V AC 50/60HZ SCREW CONNECTION FOR SCREW MOUNTING OR 35 MM RAIL-MOUNTING TYPE OF COORDINATION 2 IQ = 50 KA ALSO FULFILLS TYPE OF COORDINATION 1 1NO+1NC (MSP) 1NO+1NC (CONTACTOR)

product brand name	SIRIUS				
product designation	non-fused motor starter 3RA2				
design of the product	direct starter				
manufacturer's article number					
 of the supplied contactor 	<u>3RT2026-1AK60</u>				
 of the supplied circuit-breakers 	<u>3RV2021-4BA15</u>				
 of the supplied link module 	<u>3RA2921-1AA00</u>				
General technical data					
size of the circuit-breaker	SO				
size of load feeder	SO				
product extension auxiliary switch	Yes				
insulation voltage with degree of pollution 3 at AC rated value	690 V				
degree of pollution	3				
surge voltage resistance rated value	6 kV				
shock resistance according to IEC 60068-2-27	6g / 11 ms				
mechanical service life (operating cycles) of contactor typical	10 000 000				
type of assignment	2				
Weight	0.76 kg				
Ambient conditions					
ambient temperature					
during operation	-20 +60 °C				
during storage	-50 +80 °C				
during transport	-55 +80 °C				
Main circuit					
number of poles for main current circuit	3				
design of the switching contact	electromechanical				
adjustable current response value current of the current- dependent overload release	14 20 A				
operating voltage					
rated value	690 V				
 at AC-3 rated value maximum 	690 V				
operating frequency rated value	50 60 Hz				
operational current at AC-3 at 400 V rated value	15.5 A				
operating power at AC-3					
• at 400 V rated value	7 500 W				
• at 500 V rated value	11 000 W				
Control circuit/ Control					
control supply voltage at AC					
• at 50 Hz rated value	110 V				
• at 50 Hz rated value	88 121 V				

a at CO Lie asted we have	120.)/
 at 60 Hz rated value at 60 Hz rated value 	120 V
	96 132 V
apparent holding power of magnet coil at AC	9.4 VA
inductive power factor with the holding power of the coil	0.28
Auxiliary circuit	2
number of NC contacts for auxiliary contacts	2 2
number of NO contacts for auxiliary contacts	2
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release response value current of instantaneous short-circuit trip unit	thermal (bimetallic) 260 A
UL/CSA ratings	200 A
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	15.2 A
at 600 V rated value	17.8 A
yielded mechanical performance [hp]	1.07
• for single-phase AC motor	
— at 110/120 V rated value	1.5 hp
— at 230 V rated value	3 hp
• for 3-phase AC motor	
— at 200/208 V rated value	5 hp
— at 220/230 V rated value	5 hp
— at 460/480 V rated value	10 hp
— at 575/600 V rated value	15 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (lq)	Ŭ,
• at 400 V according to IEC 60947-4-1 rated value	153 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
	vertical Snap-mounted to DIN rail or screw-mounted with additional push-in lug
mounting position	
mounting position fastening method	Snap-mounted to DIN rail or screw-mounted with additional push-in lug
mounting position fastening method height	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm
mounting position fastening method height width	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm
mounting position fastening method height width depth	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm
mounting position fastening method height width depth required spacing	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm
mounting position fastening method height width depth required spacing • for grounded parts	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — upwards — upwards — upwards — upwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 10 mm 10 mm 10 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — downwards — forwards — downwards — forwards — downwards — hackwards — of orwards — backwards — downwards — backwards — upwards — downwards	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 10 mm 10 mm 10 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — downwards — forwards — at the side — downwards — forwards — forwards — at the side — downwards — backwards — upwards — upwards — at the side	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 10 mm 10 mm 30 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — downwards • for live parts — forwards — at the side — downwards — at the side Connections/ Terminals	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 10 mm 9 mm 10 mm 9 mm 30 mm 9 mm 10 mm 9 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — downwards • for live parts — downwards — at the side — downwards — at the side — downwards — of electrical connection for main current circuit	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 0 mm 30 mm 9 mm 10 mm 9 mm 10 mm 9 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — downwards • for live parts — forwards — downwards — at the side — downwards — of connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 0 mm 30 mm 10 mm 9 mm 10 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 30 m
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — at the side — downwards — backwards — upwards — downwards — at the side — upwards — downwards — upwards — downwards — at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 10 mm 10 mm 10 mm 10 mm 9 mm 10 mm 9 mm 10 mm 9 mm 30 mm 10 mm 9 mm
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — forwards — downwards — at the side — downwards — backwards — upwards — downwards — at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts finely connectable conductor cross-section for main contacts finely	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 0 mm 30 mm 10 mm 9 mm 10 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 30 m
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — of orwards — at the side — downwards — at the side — downwards — forwards — upwards — other side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts finely stranded with core end processing	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 0 mm 30 mm 10 mm 9 mm 10 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 2 mm 30 mm 10 mm 30 m
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — ownwards • for live parts — forwards — backwards — upwards — at the side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts finely stranded with core end processing Safety related data proportion of dangerous failures with high demand rate	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 10 mm 0 mm 30 mm 10 mm 9 mm 10 mm ² , 2x (2.5 6 mm ²) 1 6 mm ²
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — backwards — upwards — oonnextable width Uppe of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded connectable conductor cross-section for main contacts finely stranded with core end processing Safety related data proportion of dangerous failures with high demand rate according to SN 31920	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 0 mm 30 mm 10 mm 9 mm 10 mm 30 mm 10 mm 10 mm 10 mm 2 mm 1 mm 10 mm 10 mm 2 mm 1 mm 10 mm 2 mm 10 mm 3 mm 10 mm ² , 2x (2.5 6 mm ²) 1 6 mm ²
mounting position fastening method height width depth required spacing • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — ownwards • for live parts — forwards — backwards — upwards — backwards — upwards — backwards — upwards — other side Connections/ Terminals type of electrical connection for main current circuit type of connectable conductor cross-sections for main contacts stranded connectable conductor cross-section for main contacts finely stranded with core end processing Safety related data proportion of dangerous failures with high demand rate according to SN 31920 B10 value with high demand rate according to SN 31920	Snap-mounted to DIN rail or screw-mounted with additional push-in lug 193.1 mm 45 mm 97.1 mm 10 mm 0 mm 30 mm 9 mm 10 mm 10 mm 0 mm 30 mm 10 mm 9 mm 10 mm 30 mm 10 mm 10 mm 10 mm 2 mm 1 mm 10 mm 10 mm 2 mm 1 mm 10 mm 2 mm 10 mm 3 mm 10 mm ² , 2x (2.5 6 mm ²) 1 6 mm ²

roval			For use in hazard- ous locations	Test Certificates			
UK CA		EAC	K ATEX	Type Test Certific- ates/Test Report			
Marine / Shipping							
ABS	BUREAU VERITAS		Llovd's Register uts	PRS			
	other	Railway	Environment				
RMRS	<u>Confirmation</u>	Special Test Certific- ate	Environmental Con- firmations				
Further information Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2125-4BA26-0AK6 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2125-4BA26-0AK6 Service&Support (Manuals, Certificates, Characteristics, FAQs,)							
	UK Marine / Shipping	Karine / Shipping Marine / Shipping Image: Shipping state of the state of t	VICK Victor Victor Narine / Shipping Victor Victor Victor Victor Special Test Certificate Victor Victor Special Test Certificate <t< td=""><td>out ious locations UKS \widehat{U} \widehat{U} \widehat{U} \widehat{U} \widehat{U} Marine / Shipping \widehat{U} \widehat{U} \widehat{U} \widehat{U} \widehat{U} \widehat{U} Marine / Shipping \widehat{U} \widehat{U}</td></t<>	out ious locations UKS \widehat{U} \widehat{U} \widehat{U} \widehat{U} \widehat{U} Marine / Shipping \widehat{U} \widehat{U} \widehat{U} \widehat{U} \widehat{U} \widehat{U} Marine / Shipping \widehat{U}			

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2125-4BA26-0AK6&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2125-4BA26-0AK6/char

 Further characteristics (e.g. electrical endurance, switching frequency)

 http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2125-4BA26-0AK6&objecttype=14&gridview=view1

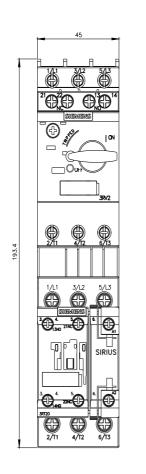

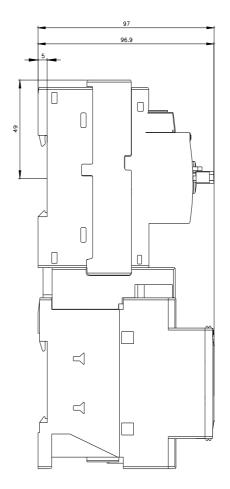

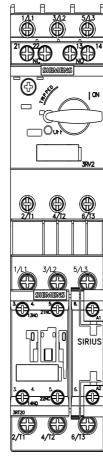

12/15/2020 🖸

4/4/2025

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA21254BA260AK6