Data sheet 3RA2220-0GB23-0AP6



Fuseless motor starter Reversing operation 600VAC Size S0 0.45-0.63A 220/240VAC 50/60HZ screw connection For 35 mm rail-mounting Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (per contactor)

product brand name	SIRIUS
product designation	non-fused motor starter 3RA2
design of the product	reversing starter
manufacturer's article number	
of the supplied contactor	3RT2023-1AP60
of the supplied circuit-breakers	3RV2011-0GA10
of the supplied RH assembly kit	3RA2923-1BB1
of the supplied busbar adapter	3RA2922-1AA00
of the supplied link module	3RA2921-1AA00
of the supplied DIN-rail adapter	3RA2922-1AA00
eneral technical data	
size of the circuit-breaker	S00
size of load feeder	SO
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (operating cycles) of contactor typical	10 000 000
type of assignment	2
Substance Prohibitance (Date)	03/01/2017
Weight	1.43 kg
mbient conditions	
ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-55 +80 °C
ain circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	0.45 0.63 A
operating voltage	
• rated value	690 V
• at AC-3 rated value maximum	690 V
operating frequency rated value	000 V
	50 60 Hz
operational current at AC-3 at 400 V rated value	
· · · · · · · · · · · · · · · · · · ·	50 60 Hz
operational current at AC-3 at 400 V rated value	50 60 Hz

control circuit/ Control control supply voltage at AC • at 50 Hz rated value • at 50 Hz rated value • at 60 Hz rated value • at 60 Hz rated value • at 60 Hz rated value • at 60 Hz rated value apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts 2 Protective and monitoring functions	
control supply voltage at AC • at 50 Hz rated value • at 50 Hz rated value • at 60 Hz rated value 15 apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts 2 Protective and monitoring functions	76 242 V 40 V 92 264 V .2 VA
at 50 Hz rated value at 50 Hz rated value at 60 Hz rated value apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	76 242 V 40 V 92 264 V .2 VA
at 50 Hz rated value at 60 Hz rated value at 60 Hz rated value at 60 Hz rated value apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	76 242 V 40 V 92 264 V .2 VA
at 60 Hz rated value at 60 Hz rated value apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	40 V 92 264 V .2 VA .28
at 60 Hz rated value apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts 2 Protective and monitoring functions	92 264 V .2 VA .28
apparent holding power of magnet coil at AC inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts 2 number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	.2 VA .28
inductive power factor with the holding power of the coil Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	.28
Auxiliary circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	
number of NO contacts for auxiliary contacts 2 Protective and monitoring functions	
Protective and monitoring functions	
trin class	
trip class CI	LASS 10
design of the overload release the	nermal (bimetallic)
response value current of instantaneous short-circuit trip unit 8.	.19 A
Short-circuit protection	
product function short circuit protection Ye	es
design of the short-circuit trip	nagnetic
conditional short-circuit current (Iq)	
	53 000 A
nstallation/ mounting/ dimensions	
	ertical
	nap-on fastening on 35 mm DIN rail
•	65 mm
	0 mm
·	20 mm
required spacing	
• for grounded parts	•
	0 mm
	mm
	0 mm
	mm
— downwards	0 mm
for live parts	
— forwards	0 mm
— backwards 0	mm
— upwards 30	0 mm
— downwards 10	0 mm
— at the side	mm
Connections/ Terminals	
type of electrical connection for main current circuit	crew-type terminals
type of connectable conductor cross-sections for main contacts stranded	10 mm², 2x (2.5 6 mm²)
connectable conductor cross-section for main contacts finely stranded with core end processing	6 mm²
Safety related data	
proportion of dangerous failures with high demand rate according to SN 31920	3 %
3	000 000
Electrical Safety	
	220
	nger-safe, for vertical contact from the front
Approvals Certificates	ngor care, for vortical contact from the front
hpprovata Certificates	Ear upp in howard
General Product Approval	For use in hazard- ous locations other Environment









nvironmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2220-0GB23-0AP6

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2220-0GB23-0AP6

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0GB23-0AP6

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2220-0GB23-0AP6&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0GB23-0AP6/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2220-0GB23-0AP6&objecttype=14&gridview=view1

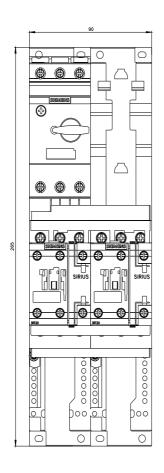

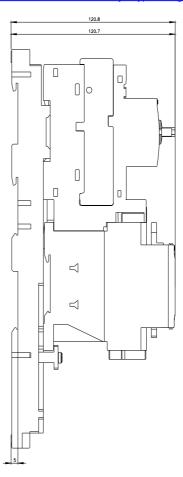

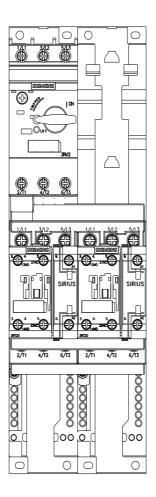

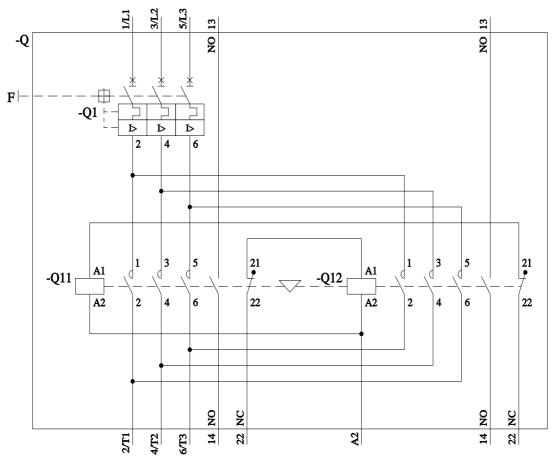

last modified: 11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA22200GB230AP6