# SIEMENS

#### Data sheet

### 3RA2327-8XB30-1AC2



reversing contactor assembly, AC-3e/AC-3, 32 A, 15 kW / 400 V, 3-pole, 24 V AC, 50/60 Hz, screw terminal, electrical and mechanical interlock, auxiliary contacts: 2 x 1 NO

product brand name	SIRIUS	
product designation	Reversing contactor assembly	
product type designation	3RA23	
manufacturer's article number		
<ul> <li>1 of the supplied contactor</li> </ul>	<u>3RT2027-1AC20</u>	
• 2 of the supplied contactor	<u>3RT2027-1AC20</u>	
<ul> <li>of the supplied RH assembly kit</li> </ul>	<u>3RA2923-2AA1</u>	
General technical data		
size of contactor	S0	
product extension auxiliary switch	Yes	
shock resistance at rectangular impulse		
• at AC	8,3g / 5 ms, 5,3g / 10 ms	
• at DC	10g / 5 ms, 7,5g / 10 ms	
shock resistance with sine pulse		
• at AC	13,5g / 5 ms, 8,3g / 10 ms	
• at DC	15g / 5 ms, 10g / 10 ms	
mechanical service life (operating cycles)		
<ul> <li>of contactor typical</li> </ul>	10 000 000	
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
during operation	-25 +60 °C	
• during storage	-55 +80 °C	
Main circuit		
number of poles for main current circuit	3	
number of NO contacts for main contacts	3	
number of NC contacts for main contacts	0	
operating voltage		
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V	
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V	
operational current		
• at AC-3		
— at 400 V rated value	32 A	
— at 500 V rated value	32 A	
— at 690 V rated value	21 A	
• at AC-3e		
— at 400 V rated value	32 A	

— at 500 V rated value	32 A
— at 690 V rated value	21 A
operating power	
• at AC-3	
— at 400 V rated value	15 kW
— at 500 V rated value	15 kW
— at 690 V rated value	18.5 kW
• at AC-3e	
— at 400 V rated value	15 kW
— at 690 V rated value	18.5 kW
at AC-4 at 400 V rated value	11 kW
operating frequency	750.4%
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
operating range factor control supply voltage rated value of	
magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	77 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.82
apparent holding power of magnet coil at AC	
• at 50 Hz	9.8 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.27
Auxiliary circuit	
Auxiliary circuit	
number of NO contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> </ul>	1
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul>	2
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li>	
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li>	2
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> </ul> </li>	2 < 1 error per 100 million operating cycles
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li>	2
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> </ul> </li>	2 < 1 error per 100 million operating cycles
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> </ul> </li>	2 <1 error per 100 million operating cycles 27 A
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> </li>	2 <1 error per 100 million operating cycles 27 A
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor</li> </ul> </li>	2 < 1 error per 100 million operating cycles 27 A 27 A
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor</li> <li>at 220/230 V rated value</li> </ul></li>	2 <1 error per 100 million operating cycles 27 A 27 A 27 A 10 hp
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> </ul>	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li>	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul></li>	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> Short-circuit protection design of the fuse link</li></ul>	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link <ul> <li>for short-circuit protection of the main circuit</li> </ul></li></ul>	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> Short-circuit protection <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit</li> <li>with type of coordination 1 required</li> </ul></li></ul>	2 < 1 error per 100 million operating cycles 27 A 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> Short-circuit protection design of the fuse link <ul> <li>for short-circuit protection of the main circuit</li> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> </ul>	2 < 1 error per 100 million operating cycles 27 A 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> <li>contact rating of auxiliary contacts according to UL</li> Short-circuit protection design of the fuse link <ul> <li>for short-circuit protection of the main circuit</li> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	2 < 1 error per 100 million operating cycles 27 A 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> Short-circuit protection <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit</li> <li>with type of coordination 1 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> Installation/ mounting/ dimensions	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A fuse gG: 10 A
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> </ul> yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> <li>contact rating of auxiliary contacts according to UL</li> Short-circuit protection design of the fuse link <ul> <li>for short-circuit protection of the main circuit</li> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li> <li>contact rating of auxiliary contacts according to UL</li> </ul> Short-circuit protection <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit</li> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> Installation/ mounting/ dimensions	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>yielded mechanical performance [hp] for 3-phase AC motor <ul> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li> <li>contact rating of auxiliary contacts according to UL</li> </ul> Short-circuit protection <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit</li> <li>with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> Installation/ mounting/ dimensions mounting position	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail
number of NO contacts for auxiliary contacts         • per direction of rotation         • instantaneous contact         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         vielded mechanical performance [hp] for 3-phase AC motor         • at 220/230 V rated value         • at 460/480 V rated value         • at 575/600 V rated value         contact rating of auxiliary contacts according to UL         Short-circuit protection         design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required         — with type of assignment 2 required         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and backward by +/- 22.5° on vertical mounting surface; scan be tilted forward and screw and snap-on mounting onto 35 mm DIN rail
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> UL/CSA ratings full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>at 575/600 V rated value</li> </ul> Short-circuit protection design of the fuse link <ul> <li>for short-circuit protection of the main circuit</li> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> Installation/ mounting/ dimensions mounting position fastening method height	2 < 1 error per 100 million operating cycles 27 A 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail 101 mm 90 mm
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>contact rating of auxiliary contacts according to UL</li> </ul> </li> <li>Short-circuit protection <ul> <li>design of the fuse link</li> <li>for short-circuit protection of the main circuit</li> <li>with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> </li> <li>Installation/ mounting/ dimensions <ul> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> </ul> </li> </ul></li>	2 < 1 error per 100 million operating cycles 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and can be the tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface; can be tilted forward by +/- 22.
number of NO contacts for auxiliary contacts         • per direction of rotation         • instantaneous contact         contact reliability of auxiliary contacts         UL/CSA ratings         full-load current (FLA) for 3-phase AC motor         • at 480 V rated value         • at 600 V rated value         • at 600 V rated value         vielded mechanical performance [hp] for 3-phase AC motor         • at 220/230 V rated value         • at 460/480 V rated value         • at 575/600 V rated value         contact rating of auxiliary contacts according to UL         Short-circuit protection         design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required         — with type of assignment 2 required         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         required spacing	2 < 1 error per 100 million operating cycles 27 A 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600
number of NO contacts for auxiliary contacts <ul> <li>per direction of rotation</li> <li>instantaneous contact</li> </ul> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings <ul> <li>full-load current (FLA) for 3-phase AC motor <ul> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 220/230 V rated value</li> <li>at 460/480 V rated value</li> <li>at 575/600 V rated value</li> <li>at 575/600 V rated value</li> </ul> </li> <li>contact rating of auxiliary contacts according to UL</li> <li>Short-circuit protection</li> <li>design of the fuse link <ul> <li>for short-circuit protection of the main circuit</li> <li>with type of assignment 2 required</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul> </li> <li>Installation/ mounting/ dimensions <ul> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> </ul> </li> </ul></li>	2 < 1 error per 100 million operating cycles 27 A 27 A 27 A 10 hp 20 hp 25 hp A600 / Q600

— backwards	0 mm
	6 mm
— upwards — downwards	6 mm
— at the side	6 mm
for grounded parts	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— at the side	6 mm
— downwards	6 mm
for live parts	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	screw-type terminals
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)
<ul> <li>solid or stranded</li> </ul>	2x (1 2.5 mm²), 2x (2.5 10 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
type of connectable conductor cross-sections	
<ul> <li>for auxiliary contacts</li> </ul>	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	75 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Communication/ Protocol	
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function control circuit interface with IO link Certificates/ approvals	No
General Product Approval	Declaration of Conformity
	Declaration of contonnity
Confirmation UL	
Test Certificates Marine / Shipping	
Special Test Certific- ate	DINV LIRS PRS

Subject to change without notice © Copyright Siemens other

RINA



Confirmation

Vibration and Shock

#### **Further information**

Siemens has decided to exit the Russian market (see here).

 $\underline{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}$ 

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2327-8XB30-1AC2

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2327-8XB30-1AC2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2327-8XB30-1AC2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA2327-8XB30-1AC2&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2327-8XB30-1AC2/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2327-8XB30-1AC2&objecttype=14&gridview=view1

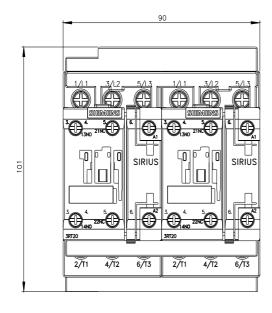

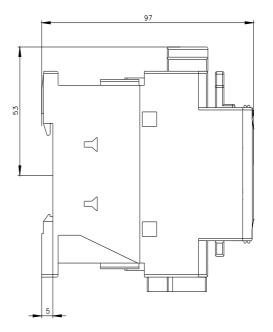

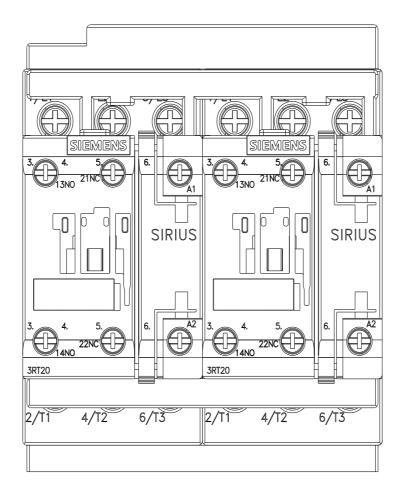

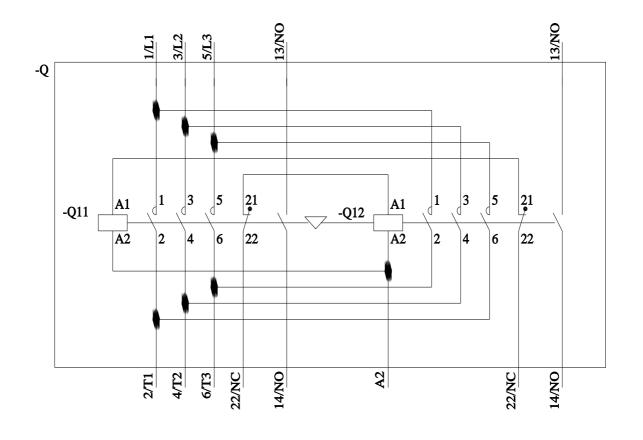

last modified:

11/21/2022 🖸

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RA23278XB301AC2