SIEMENS

Data sheet

3RA2338-8XB30-1AC2



reversing contactor assembly, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 24 V AC, 50/60 Hz, screw terminal, electrical and mechanical interlock, auxiliary contacts: 2 x 1 NO

product brand name	SIRIUS
product designation	Reversing contactor assembly
product type designation	3RA23
manufacturer's article number	
 1 of the supplied contactor 	<u>3RT2038-1AC20</u>
 2 of the supplied contactor 	<u>3RT2038-1AC20</u>
 of the supplied RS assembly kit 	<u>3RA2933-2AA1</u>
General technical data	
size of contactor	S2
product extension auxiliary switch	Yes
shock resistance at rectangular impulse	
• at AC	11.8g / 5 ms, 11.6g / 10 ms
shock resistance with sine pulse	
• at AC	18.5g / 5 ms, 11.6g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Weight	2.6 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operating voltage	
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operational current	
• at AC-3	
— at 400 V rated value	80 A
— at 500 V rated value	80 A
— at 690 V rated value	58 A
• at AC-3e	
— at 400 V rated value	80 A
— at 500 V rated value	80 A

— at 690 V rated value	58 A
operating power	
• at AC-3	
— at 400 V rated value	37 kW
— at 500 V rated value	37 kW
— at 690 V rated value	45 kW
• at AC-3e	
— at 400 V rated value	37 kW
— at 690 V rated value	45 kW
• at AC-4 at 400 V rated value	30 kW
operating frequency	00 111
	500 1/h
• at AC-3 maximum	
• at AC-3e maximum	500 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
 at 50 Hz rated value 	24 V
 at 60 Hz rated value 	24 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	210 VA
• at 60 Hz	188 VA
inductive power factor with closing power of the coil	
at 50 Hz	0.69
• at 60 Hz	0.65
apparent holding power of magnet coil at AC	
• at 50 Hz	17.2 VA
• at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.36
• at 60 Hz	0.39
	0.39
• at 60 Hz	0.39
• at 60 Hz Auxiliary circuit	0.39
• at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts	
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts o per direction of rotation	
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts o per direction of rotation number of NO contacts for auxiliary contacts	0
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts e per direction of rotation number of NO contacts for auxiliary contacts e per direction of rotation e instantaneous contact	0 1 2
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts	0 1
• at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts • per direction of rotation number of NO contacts for auxiliary contacts • per direction of rotation • instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings	0 1 2
• at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts • per direction of rotation number of NO contacts for auxiliary contacts • per direction of rotation • instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor	0 1 2 < 1 error per 100 million operating cycles
• at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts • per direction of rotation number of NO contacts for auxiliary contacts • per direction of rotation • instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	0 1 2 < 1 error per 100 million operating cycles 65 A
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts oper direction of rotation number of NO contacts for auxiliary contacts oper direction of rotation oinstantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor o at 480 V rated value o at 600 V rated value	0 1 2 < 1 error per 100 million operating cycles
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts e per direction of rotation number of NO contacts for auxiliary contacts e per direction of rotation e instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor e at 480 V rated value e at 600 V rated value vielded mechanical performance [hp] for 3-phase AC motor e at 220/230 V rated value	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for 3-phase AC motor at 460/480 V rated value 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact Contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 45075/600 V rated value 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact Contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 45075/600 V rated value 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp
at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp
• at 60 Hz • at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts • per direction of rotation number of NO contacts for auxiliary contacts • per direction of rotation • instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value • at 460/480 V rated value • at 460/480 V rated value • at 460/480 V rated value • at 575/600 V rated value • at 575/600 V rated value • at 575/600 V rated value	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp
• at 60 Hz • at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts • per direction of rotation number of NO contacts for auxiliary contacts • per direction of rotation • instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value • at 600 V rated value • at 460/480 V rated value • at 460/480 V rated value • at 575/600 V rated value	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp
 at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp A600 / Q600
 at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 50 hp 60 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 250 A
 at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 250 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A
 at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 250 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and
 at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 460/480 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value at 575/600 V rated value of or short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 250 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
 at 60 Hz Auxiliary circuit number of NC contacts for auxiliary contacts per direction of rotation number of NO contacts for auxiliary contacts per direction of rotation instantaneous contact contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 460/480 V rated value at 460/480 V rated value at 575/600 V rated value at 575/600 V rated value bastor rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	0 1 2 < 1 error per 100 million operating cycles 65 A 62 A 20 hp 50 hp 60 hp A600 / Q600 gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 250 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A fuse gG: 10 A +/-180° rotation possible on vertical mounting surface; can be tilted forward and

130 mm 10 mm 0 mm 10 mm 2 screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals 2 x (1 35 mm²), 1x (1 50 mm²) 2 x (1 35 mm²), 1x (1 50 mm²) 2 x (1 25 mm²), 1x (1 35 mm²)
0 mm 10 mm 2 screw-type terminals screw-type terminals
0 mm 10 mm 2 screw-type terminals screw-type terminals
0 mm 10 mm 2 screw-type terminals screw-type terminals
10 mm 10 mm 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
10 mm 10 mm 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
10 mm 10 mm 2 screw-type terminals Screw-type terminals
10 mm 0 mm 10 mm 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm2), 1x (1 50 mm2)
0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 2 x rew-type terminals Screw-type terminals
0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 2 x rew-type terminals Screw-type terminals
10 mm 10 mm 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm2), 1x (1 50 mm2)
10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 2 x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm2), 1x (1 50 mm2)
10 mm 10 mm 0 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm2), 1x (1 50 mm2)
10 mm 0 mm 10 mm 10 mm 10 mm 10 mm x crew-type terminals Screw-type terminals Screw-type terminals Screw-type terminals x crew-type terminals $x (1 35 mm^2), 1x (1 50 mm^2)$ $2x (1 35 mm^2), 1x (1 50 mm^2)$
0 mm 10 mm 10 mm 10 mm 10 mm 2 screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals 2 x (1 35 mm ²), 1x (1 50 mm ²) 2 x (1 35 mm ²), 1x (1 50 mm ²)
0 mm 10 mm 10 mm 10 mm 10 mm 2 screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals 2 x (1 35 mm ²), 1x (1 50 mm ²) 2 x (1 35 mm ²), 1x (1 50 mm ²)
10 mm 10 mm 10 mm 10 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
10 mm 10 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
10 mm 10 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
10 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
screw-type terminals Screw-type terminals Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
Screw-type terminals Screw-type terminals 2x (1 35 mm²), 1x (1 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²)
Screw-type terminals 2x (1 35 mm ²), 1x (1 50 mm ²) 2x (1 35 mm ²), 1x (1 50 mm ²)
2x (1 35 mm²), 1x (1 50 mm²) 2x (1 35 mm²), 1x (1 50 mm²)
2x (1 35 mm²), 1x (1 50 mm²)
2x (1 35 mm²), 1x (1 50 mm²)
$2 \times (0.5 - 1.5 \text{ mm}^2) - 2 \times (0.75 - 0.5 \text{ mm}^2)$
2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)
2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)
2x (20 16), 2x (18 14)
Yes
IP20
finger-safe, for vertical contact from the front
Yes
No
No
1.Å Jovds
Register
DNV LRS PRS
5

Subject to change without notice © Copyright Siemens other

Environment





Confirmation

Transport Information

Environmental Con**firmations**

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2338-8XB30-1AC2

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2338-8XB30-1AC2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2338-8X AC₂


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2338-8XB30-1AC2&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RA2338-8XB30-1AC2/char

Further characteristics (e.g. electrical endurance, switching frequency)

earch&mlfb=3RA2338-8XB30-1AC2&objecttype=14&gridview=view1 http://www.automation.siemens.com/bilddb/index.aspx?view=S

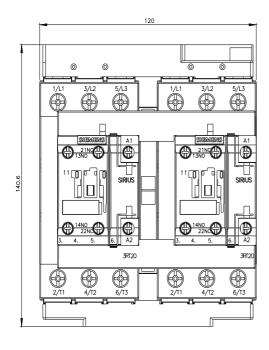

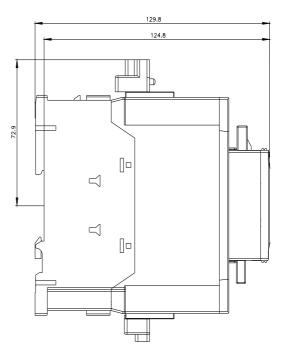

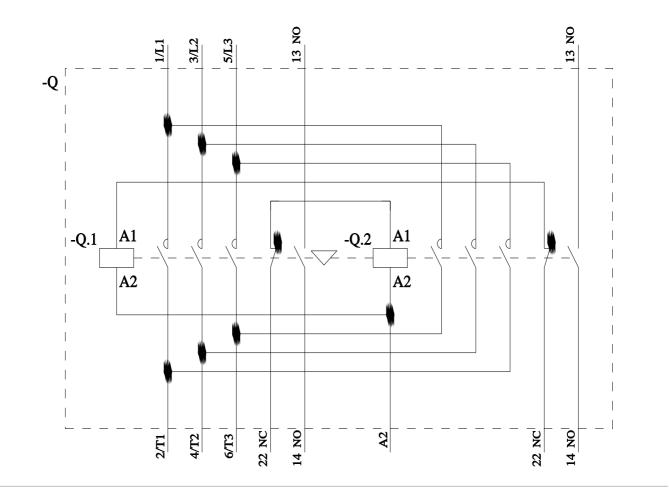

last modified:



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RA23388XB301AC2