



SIRIUS Compact load feeder DOL starter 690 V 110...240 V AC/DC 50...60 Hz
0.32...1.25 A IP20 Connection main circuit: plug-in, without terminals Connection
auxiliary circuit: plug-in, without terminals

product brand name	SIRIUS
product designation	compact starter
design of the product	direct starter
product type designation	3RA61
General technical data	
product function control circuit interface to parallel wiring	Yes
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
• at AC in hot operating state	0.1 W
• at AC in hot operating state per pole	0.03 W
• without load current share typical	6 W
insulation voltage rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 000 V
maximum permissible voltage for protective separation	
• between main and auxiliary circuit	400 V
• between auxiliary and auxiliary circuit	250 V
• between control and auxiliary circuit	300 V
degree of protection NEMA rating	other
shock resistance	a=60 m/s ² (6g) with 10 ms per 3 shocks in all axes
vibration resistance	f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s ² ; 10 cycles
mechanical service life (operating cycles)	
• of the main contacts typical	10 000 000
• of auxiliary contacts typical	10 000 000
• of the signaling contacts typical	10 000 000
electrical endurance (operating cycles) of auxiliary contacts	
• at DC-13 at 6 A at 24 V typical	30 000
• at AC-15 at 6 A at 230 V typical	200 000
type of assignment	continuous operation according to IEC 60947-6-2
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 Lead titanium zirconium oxide - 12626-81-2
Weight	1.356 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-20 ... +60 °C

<ul style="list-style-type: none"> • during storage 	-55 ... +80 °C
<ul style="list-style-type: none"> • during transport 	-55 ... +80 °C
relative humidity during operation	10 ... 90 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	0.32 ... 1.25 A
formula for making capacity limit current	$38.4 \times I_e$
formula for limit current breaking capacity	$32 \times I_e$
yielded mechanical performance for 4-pole AC motor <ul style="list-style-type: none"> • at 400 V rated value • at 500 V rated value • at 690 V rated value 	0.37 kW 0.55 kW 0.75 kW
operating voltage at AC-3 rated value maximum	690 V
operational current <ul style="list-style-type: none"> • at AC at 400 V rated value • at AC-3 at 400 V rated value • at AC-43 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value 	1.25 A 1.25 A 1.1 A 1.2 A 1.1 A
operating power <ul style="list-style-type: none"> • at AC-3 at 400 V rated value • at AC-43 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value 	0.37 kW 370 W 550 W 750 W
no-load switching frequency	3 600 1/h
operating frequency <ul style="list-style-type: none"> • at AC-41 according to IEC 60947-6-2 maximum • at AC-43 according to IEC 60947-6-2 maximum 	750 1/h 250 1/h
Control circuit/ Control	
type of voltage	AC/DC
control supply voltage 1 at AC <ul style="list-style-type: none"> • at 50 Hz rated value • at 50 Hz • at 60 Hz 	240 V 110 ... 240 V 110 ... 240 V
control supply voltage frequency <ul style="list-style-type: none"> • 1 rated value • 2 rated value 	50 Hz 60 Hz
control supply voltage 1 at DC rated value	240 V
control supply voltage 1 at DC	110 ... 240 V
holding power <ul style="list-style-type: none"> • at AC maximum • at DC maximum 	6 W 5.1 W
Auxiliary circuit	
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of NO contacts of instantaneous short-circuit trip unit for signaling contact	1
number of CO contacts of the current-dependent overload release for signaling contact	1
operational current of auxiliary contacts at AC-12 maximum	10 A
operational current of auxiliary contacts at DC-13 at 250 V	0.27 A
Protective and monitoring functions	
trip class	CLASS 10 and 20 adjustable
operating short-circuit current breaking capacity (Ics) <ul style="list-style-type: none"> • at 400 V rated value • at 500 V rated value • at 690 V rated value 	53 kA 3 kA 3 kA
UL/CSA ratings	

full-load current (FLA) for 3-phase AC motor	• at 480 V rated value	1.25 A
	• at 600 V rated value	1.25 A
yielded mechanical performance [hp] for 3-phase AC motor	• at 460/480 V rated value	0.5 hp
	• at 575/600 V rated value	0.5 hp
contact rating of auxiliary contacts according to UL	contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300	
Short-circuit protection		
product function short circuit protection	Yes	
design of short-circuit protection	electromagnetic	
design of the fuse link	• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A
	• for short-circuit protection of the signaling switch of the short-circuit release required	6A gL/gG/400V
	• for short-circuit protection of the signaling switch of the overload release required	4A gL/gG/400V
Installation/ mounting/ dimensions		
mounting position	any	
mounting position recommended	vertical, on horizontal standard DIN rail	
fastening method	screw and snap-on mounting	
height	170 mm	
width	45 mm	
depth	165 mm	
Connections/ Terminals		
product component removable terminal for main circuit	Yes	
product component removable terminal for auxiliary and control circuit	Yes	
type of electrical connection	• for main current circuit	plug-in without terminals
	• for auxiliary and control circuit	plug-in without terminals
Safety related data		
proportion of dangerous failures	• with low demand rate according to SN 31920	40 %
	• with high demand rate according to SN 31920	50 %
B10 value with high demand rate according to SN 31920	3 000 000	
failure rate [FIT] with low demand rate according to SN 31920	100 FIT	
IEC 61508		
T1 value for proof test interval or service life according to IEC 61508	20 a	
Electrical Safety		
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe	
Communication/ Protocol		
product function bus communication	No	
protocol is supported	• AS-Interface protocol	No
	• IO-Link protocol	No
product function control circuit interface with IO link	No	
Electromagnetic compatibility		
conducted interference	• due to burst according to IEC 61000-4-4	4 kV main contacts, 2 kV auxiliary contacts
	• due to conductor-earth surge according to IEC 61000-4-5	4 kV main contacts, 2 kV auxiliary contacts
	• due to conductor-conductor surge according to IEC 61000-4-5	2 kV main contacts, 1 kV auxiliary contacts
	• due to high-frequency radiation according to IEC 61000-4-6	0.15-80Mhz at 10V
field-based interference according to IEC 61000-4-3	10 V/m	
electrostatic discharge according to IEC 61000-4-2	8 kV	
conducted HF interference emissions according to CISPR11	150 kHz ... 30 MHz Class A	
field-bound HF interference emission according to CISPR11	30 ... 1000 MHz Class A	

Supply voltage	
Supply voltage required Auxiliary voltage	No
Display	
number of LEDs	2
Approvals Certificates	
General Product Approval	EMV



Functional Safety	Test Certificates	Marine / Shipping	other	Dangerous goods	Environment
-------------------	-------------------	-------------------	-------	-----------------	-------------



[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Transport Information](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6120-0BP30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6120-0BP30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-0BP30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6120-0BP30&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-0BP30/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA6120-0BP30&objecttype=14&gridview=view1>

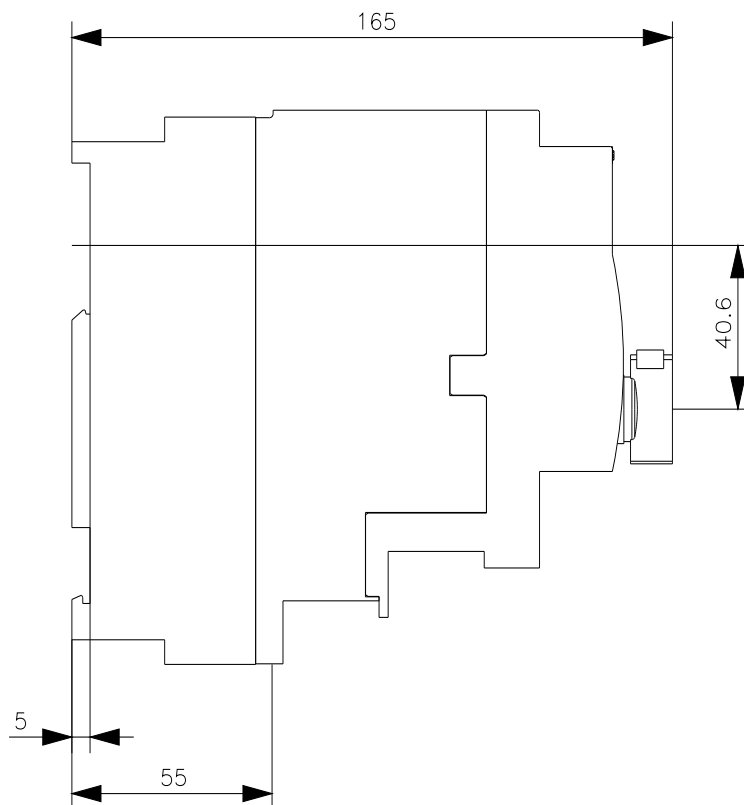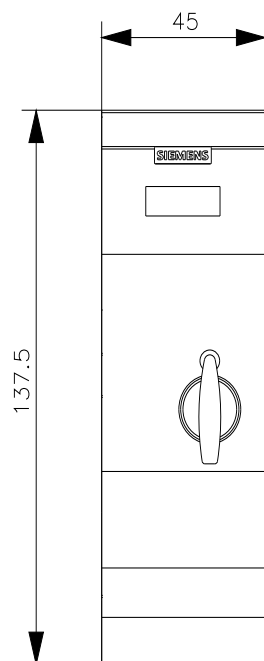

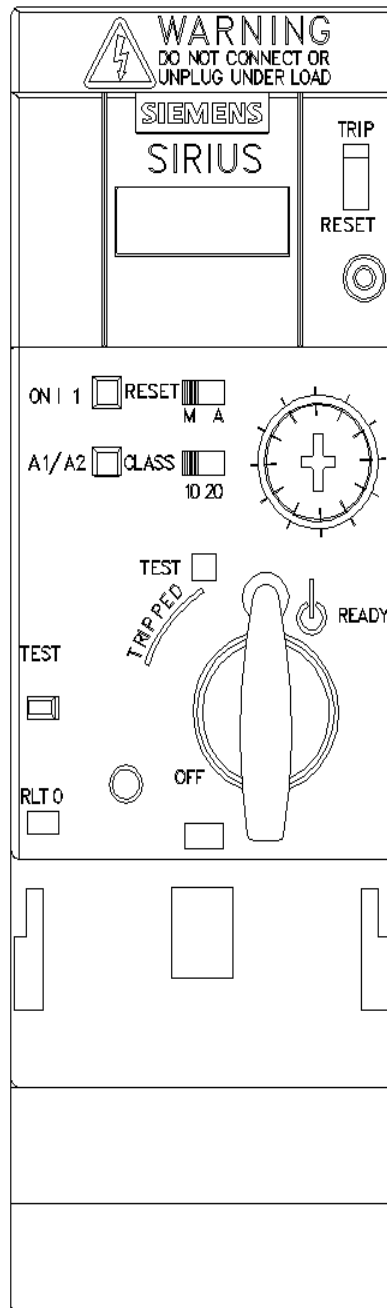

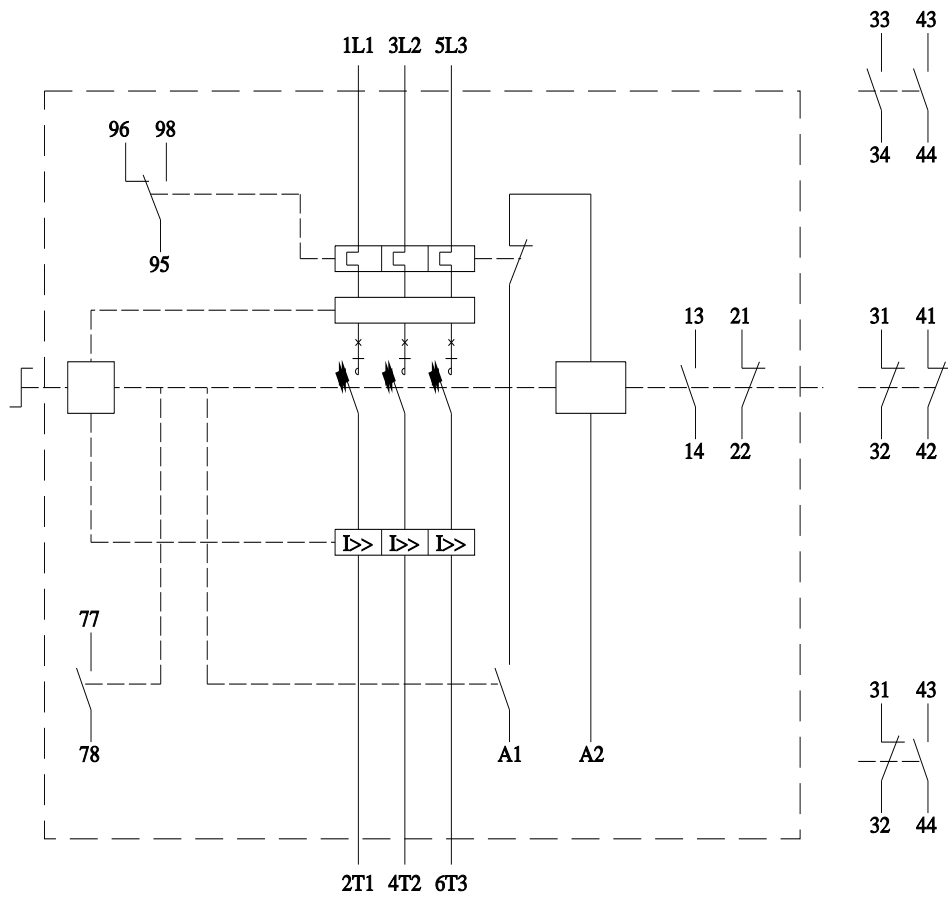

last modified:

4/2/2025 

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Siemens:](#)

[3RA61200BP30](#)