SIEMENS

Data sheet

3RB3026-2QE0



Overload relay 6...25 A Electronic For motor protection Size S0, Class 20 Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS		
product designation	solid-state overload relay		
product type designation	3RB3		
General technical data			
size of overload relay	S0		
size of contactor can be combined company-specific	S0		
power loss [W] for rated value of the current at AC in hot operating state	1.7 W		
• per pole	0.57 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for protective separation in networks with grounded star point			
 between auxiliary and auxiliary circuit 	300 V		
 between auxiliary and auxiliary circuit 	300 V		
 between main and auxiliary circuit 	600 V		
 between main and auxiliary circuit 	690 V		
shock resistance	15g / 11 ms		
according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms		
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s²; 10 cycles		
thermal current	25 A		
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]		
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001		
reference code according to IEC 81346-2	F		
Substance Prohibitance (Date)	10/01/2009		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
during operation	-25 +60 °C		
during storage	-40 +80 °C		
during transport	-40 +80 °C		
temperature compensation	-25 +60 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
adjustable current response value current of the current- dependent overload release	6 25 A		
operating voltage			
rated value	690 V		
 at AC-3e rated value maximum 	690 V		
operating frequency rated value	50 60 Hz		


operational current rated value	25 A
operational current at AC-3e at 400 V rated value	25 A
operating power	
• for 3-phase motors at 400 V at 50 Hz	3 11 kW
 for AC motors at 500 V at 50 Hz 	4 15 kW
 for AC motors at 690 V at 50 Hz 	5.5 22 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	
trip class	CLASS 20E
design of the overload release	electronic
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	25 A
at 400 V rated value at 600 V rated value	25 A 25 A
contact rating of auxiliary contacts according to UL	B600 / R300
Short-circuit protection	80007 K300
design of the fuse link	
- for about aircuit protection of the main size it	
for short-circuit protection of the main circuit	
- with type of coordination 1 required	gG: 125 A, RK5: 100 A
 — with type of coordination 1 required — with type of assignment 2 required 	gG: 63 A, J: 100 A
 — with type of coordination 1 required — with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions 	gG: 63 A, J: 100 A fuse gG: 6 A
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position 	gG: 63 A, J: 100 A fuse gG: 6 A any
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes spring-loaded terminals
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes spring-loaded terminals spring-loaded terminals
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes spring-loaded terminals
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes spring-loaded terminals spring-loaded terminals
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes spring-loaded terminals spring-loaded terminals
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes Spring-loaded terminals spring-loaded terminals Top and bottom
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes Spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm ²)
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid stranded solid or stranded	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes Yes spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm ²) 1x 10 mm ² 1x (1 10 mm ²)
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid stranded solid or stranded finely stranded with core end processing 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes Spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm ²) 1x 10 mm ² 1x (1 6 mm ²)
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid stranded solid or stranded finely stranded with core end processing finely stranded without core end processing 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes Yes spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm ²) 1x 10 mm ² 1x (1 10 mm ²)
 with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid stranded solid or stranded finely stranded with core end processing 	gG: 63 A, J: 100 A fuse gG: 6 A any Contactor mounting 109 mm 45 mm 85 mm Yes Spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm ²) 1x 10 mm ² 1x (1 6 mm ²)


— solid			2x (0.25 1.5 mm²)			
— solid or stra	inded		2x (0.25 1,5 mm²)			
	ded with core end processir		2x (0,22 1,5 mm ²)			
, ,	ded without core end proces		2x (0.25 1.5 mm ²)			
-			1x (24 16), 2x (24 16)			
design of screwdriver				meter 5 to 6 mm		
size of the screwdrive			Pozidriv PZ 2			
Safety related data	i up					
	the front eccording to IE	C 60520	D20			
protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529			IP20			
-	-	60529	finger-safe, for vertical contact from the front			
Communication/ Protoc				_		
	via input/output link mas	ster	No			
Electromagnetic compa		_				
conducted interference	e					
 due to burst accord 	ording to IEC 61000-4-4	2	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3			
	-earth surge according to I		2 kV (line to earth) corresponds	s to degree of severity 3		
	-conductor surge according	to IEC	I kV (line to line) corresponds t	o degree of severity 3		
61000-4-5						
 due to high-frequ 4-6 	ency radiation according to	IEC 61000-	10 V in frequency range 0.15 to	80 MHz, modulation 80	% AM with 1 kHz	
	ce according to IEC 6100	1-4-3	10 \//m			
	ce according to IEC 61000 e according to IEC 61000	-	10 V/m 6 kV contact discharge / 8 kV air discharge			
-	e according to IEC 61000	-4-2	s kv contact discharge / 8 kv a	ir discharge		
Display						
display version for swite	ching status	ŝ	Slide switch			
Certificates/ approvals						
General Product App	roval				EMC	
CSA			UL	LIIL	RCM	
ous locations	Declaration of Conform	nity	Test Certificates		Marine / Shipping	
ATEX ATEX	CE EG-Konf.	UK CA	Special Test Certific- ate	<u>Type Test Certific-</u> ates/Test Report	Lloyd's Register uis	
Marine / Shipping			other			
PRS	RINA	DNV-GL	<u>Confirmation</u>			
Further information						
Siemens has decided	to exit the Russian marke					
https://press.siemens.co	om/global/en/pressrelease/	siemens-wind-dowr				
	n the renewal of the curre		 EAC certification if you intend 	to import or offer to sup	nly those products to an	
	ther than the sanctioned E				pry these products to an	
Information on the packaging						
https://support.industry.siemens.com/cs/ww/en/view/109813875						
	nloadcenter (Catalogs, Bi	ochures,)				
https://www.siemens.com/ic10 Industry Mall (Online ordering system)						
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3026-2QE0						
Cax online generator						
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3026-2QE0						
Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-2QE0						
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)						
http://www.automation.s	siemens.com/bilddb/cax_de	e.aspx?mlfb=3RB30	26-2QE0⟨=en			
3RB30262QE0				Cubic et te	change without notice	


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB3026-2QE0/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3026-2QE0&objecttype=14&gridview=view1

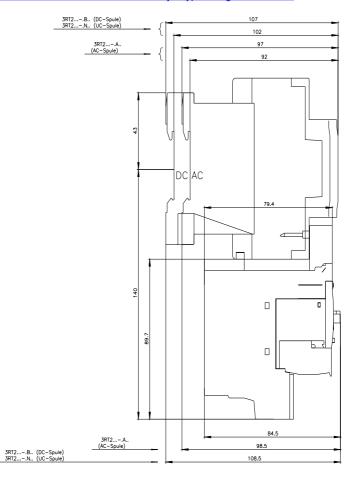

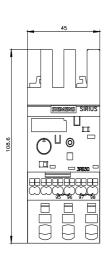

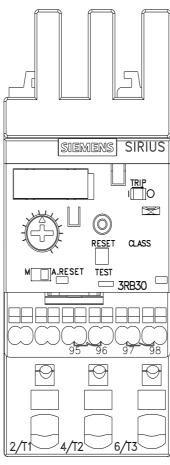

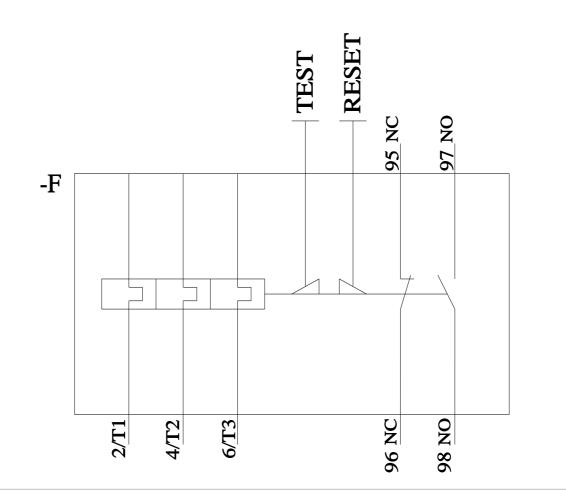

last modified:

2/9/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RB30262QE0