## **SIEMENS**

Data sheet 3RB3143-4UW1



Overload relay 12.5...50 A Electronic For motor protection Size S3, Class 5E...30E Stand-alone installation Main circuit: Straight-through transformer Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	solid-state overload relay
product type designation	3RB3
General technical data	
size of overload relay	S3
size of contactor can be combined company-specific	S3
power loss [W] for rated value of the current at AC in hot operating state	0.2 W
• per pole	0.07 W
insulation voltage with degree of pollution 3 at AC rated value	1 000 V
surge voltage resistance rated value	8 kV
maximum permissible voltage for protective separation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul> <li>between main and auxiliary circuit</li> </ul>	600 V
between main and auxiliary circuit	690 V
shock resistance	8g / 11 ms
according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s²; 10 cycles
thermal current	50 A
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-40 +80 °C
during transport	-40 +80 °C
temperature compensation	-25 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	12.5 50 A
operating voltage	
• rated value	1 000 V
<ul> <li>for remote-reset function at DC</li> </ul>	24 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	1 000 V

operating frequency rated value	50 60 Hz
operational current rated value	50 A
operational current at AC-3e at 400 V rated value	50 A
operating power	
• for 3-phase motors at 400 V at 50 Hz	7.5 22 kW
• for AC motors at 500 V at 50 Hz	11 30 kW
• for AC motors at 690 V at 50 Hz	11 45 kW
Auxiliary circuit	The local
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	v
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	U.IIA
trip class	CLASS 5E, 10E, 20E and 30E adjustable
design of the overload release	electronic
response value current of the grounding protection minimum	0.75 x IMotor
response time of the grounding protection in settled state	1 000 ms
operating range of the grounding protection relating to current set value	
• minimum	IMotor > lower current setting value
• maximum	IMotor < upper current setting value x 3.5
UL/CSA ratings	
OL/OSA ratings	
full-load current (FLA) for 3-phase AC motor	
	50 A
full-load current (FLA) for 3-phase AC motor	50 A 50 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	50 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL	50 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection	50 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link	50 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit	50 A B600 / R300
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required	50 A B600 / R300
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required	50 A B600 / R300 gG: 200 A gG: 200 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required	50 A B600 / R300 gG: 200 A gG: 200 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	50 A B600 / R300 gG: 200 A gG: 200 A fuse gG: 6 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position	50 A B600 / R300  gG: 200 A gG: 200 A fuse gG: 6 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method	50 A B600 / R300  gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height	gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation 106 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	50 A B600 / R300  gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation 106 mm 70 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method  height  width  depth	50 A B600 / R300  gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation 106 mm 70 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and	50 A B600 / R300  gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation 106 mm 70 mm 124 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit	50 A B600 / R300  gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation 106 mm 70 mm 124 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	50 A B600 / R300  gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation 106 mm 70 mm 124 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit	gG: 200 A gG: 200 A fuse gG: 6 A  any stand-alone installation 106 mm 70 mm 124 mm  Yes  straight-through transformers

	( )
	x (0.5 4 mm²), 2x (0.5 2.5 mm²)
<ul><li>— solid or stranded</li><li>1x</li></ul>	x (0,5 4 mm²), 2x (0,5 2,5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
• for AWG cables for auxiliary contacts	x (20 14)
tightening torque	
• for auxiliary contacts with screw-type terminals 0.	.8 1.2 N·m
design of screwdriver shaft Di	iameter 5 to 6 mm
size of the screwdriver tip	ozidriv PZ 2
design of the thread of the connection screw	
• of the auxiliary and control contacts	13
Safety related data	
protection class IP on the front according to IEC 60529	220
touch protection on the front according to IEC 60529 fin	nger-safe, for vertical contact from the front
Communication/ Protocol	
type of voltage supply via input/output link master	0
Electromagnetic compatibility	
conducted interference	
• due to burst according to IEC 61000-4-4	kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
• due to conductor-earth surge according to IEC 61000-4-5	kV (line to earth) corresponds to degree of severity 3
<ul> <li>due to conductor-conductor surge according to IEC</li> <li>61000-4-5</li> </ul>	kV (line to line) corresponds to degree of severity 3
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	0 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
field-based interference according to IEC 61000-4-3	0 V/m
electrostatic discharge according to IEC 61000-4-2	kV contact discharge / 8 kV air discharge
Display	
display version for switching status	lide switch
Certificates/ approvals	
General Product Approval	EMC



Confirmation









For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report

Special Test Certificate



## Marine / Shipping



LRS







Confirmation

other

## Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$ 

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3143-4UW1

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3143-4UW1

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4UW1


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RB3143-4UW1&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4UW1/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3143-4UW1&objecttype=14&gridview=view1







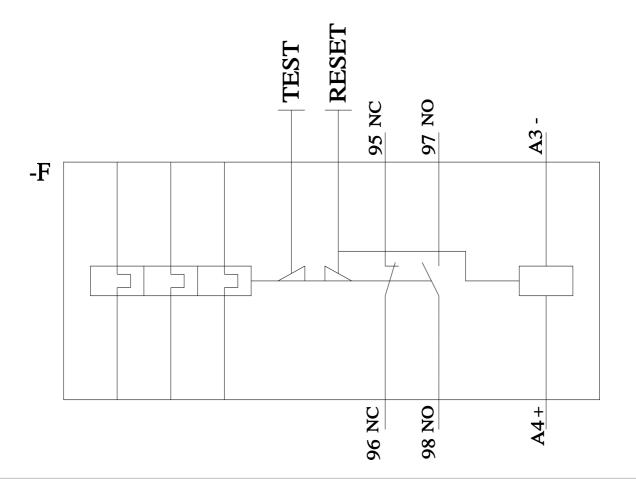

last modified: 2/9/2022 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RB31434UW1