SIEMENS

Data sheet 3RB3143-4XX1



Overload relay 32...115 A Electronic For motor protection Size S3, Class 5E...30E Stand-alone installation Main circuit: Straight-through transformer Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS		
product designation	solid-state overload relay		
product type designation	3RB3		
General technical data			
size of overload relay	S3		
size of contactor can be combined company-specific	S3		
power loss [W] for rated value of the current at AC in hot operating state	0.6 W		
• per pole	0.2 W		
insulation voltage with degree of pollution 3 at AC rated value	1 000 V		
surge voltage resistance rated value	8 kV		
maximum permissible voltage for protective separation in networks with grounded star point			
 between auxiliary and auxiliary circuit 	300 V		
 between auxiliary and auxiliary circuit 	300 V		
 between main and auxiliary circuit 	600 V		
between main and auxiliary circuit	690 V		
shock resistance	8g / 11 ms		
• according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms		
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles		
thermal current	115 A		
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]		
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001		
reference code according to IEC 81346-2	F		
Substance Prohibitance (Date)	03/01/2017		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
 during operation 	-25 +60 °C		
during storage	-40 +80 °C		
during transport	-40 +80 °C		
temperature compensation	-25 +60 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
adjustable current response value current of the current- dependent overload release	32 115 A		
operating voltage			
• rated value	1 000 V		
 for remote-reset function at DC 	24 V		
 at AC-3e rated value maximum 	1 000 V		

operating frequency rated value	50 60 Hz
operational current rated value	115 A
operational current at AC-3e at 400 V rated value	115 A
operating power	
• for 3-phase motors at 400 V at 50 Hz	18.5 55 kW
• for AC motors at 500 V at 50 Hz	22 75 kW
• for AC motors at 690 V at 50 Hz	30 90 kW
Auxiliary circuit	00 00 NY
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	·
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	
at 24 V	2 A
	0.55 A
at 60 V at 110 V	0.55 A 0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	01400 55 405 005 1005 11 111
trip class	CLASS 5E, 10E, 20E and 30E adjustable
design of the overload release	electronic
response value current of the grounding protection minimum response time of the grounding protection in settled state	0.75 x IMotor 1 000 ms
response time of the archinging profession in settled state	1 000 ms
	1 000 1110
operating range of the grounding protection relating to current set value	1 000 mg
operating range of the grounding protection relating to	IMotor > lower current setting value
operating range of the grounding protection relating to current set value	
operating range of the grounding protection relating to current set value • minimum	IMotor > lower current setting value
operating range of the grounding protection relating to current set value • minimum • maximum	IMotor > lower current setting value
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings	IMotor > lower current setting value
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor	IMotor > lower current setting value IMotor < upper current setting value x 3.5
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	IMotor > lower current setting value IMotor < upper current setting value x 3.5
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm 70 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required installation/ mounting/ dimensions mounting position fastening method height width depth	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm 70 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm 70 mm 124 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm 70 mm 124 mm Yes
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm 70 mm 124 mm Yes straight-through transformers
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm 70 mm 124 mm Yes
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit	IMotor > lower current setting value IMotor < upper current setting value x 3.5 115 A 115 A 115 A B600 / R300 gG: 315 A gG: 315 A fuse gG: 6 A any stand-alone installation 106 mm 70 mm 124 mm Yes straight-through transformers spring-loaded terminals

 for auxiliary contacts 			
— solid	2x (0.25 1.5 mm²)		
— solid or stranded	2x (0,25 1,5 mm²)		
 finely stranded with core end processing 	2x (0.25 1.5 mm²)		
 finely stranded without core end processing 	2x (0.25 1.5 mm²)		
 for AWG cables for auxiliary contacts 	2x (24 16)		
design of screwdriver shaft	Diameter 5 to 6 mm		
size of the screwdriver tip	Pozidriv PZ 2		
Safety related data			
protection class IP on the front according to IEC 60529	IP20		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front		
Communication/ Protocol			
type of voltage supply via input/output link master	No		
Electromagnetic compatibility			
conducted interference			
 due to burst according to IEC 61000-4-4 	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3		
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV (line to earth) corresponds to degree of severity 3		
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV (line to line) corresponds to degree of severity 3		
 due to high-frequency radiation according to IEC 61000- 4-6 	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz		
field-based interference according to IEC 61000-4-3	10 V/m		
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge		
Display			
display version for switching status	Slide switch		
Certificates/ approvals			
General Product Approval		EMC	

Confirmation









For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping







Special Test Certific-<u>ate</u>

Type Test Certificates/Test Report



Marine / Shipping









Confirmation

other

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3143-4XX1

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3143-4XX1

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4XX1


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB3143-4XX1/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3143-4XX1&objecttype=14&gridview=view1







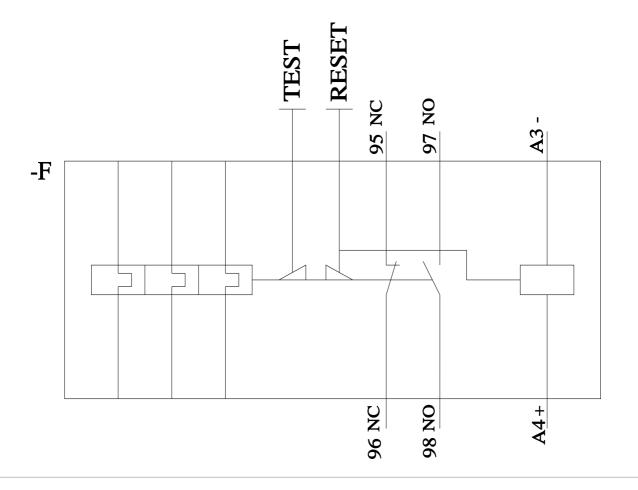

last modified: 2/9/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RB31434XX1