SIEMENS

Data sheet 3RF2420-1AB45



solid-state contactor 3-phase 3RF2 AC 51 / 22 A / 40 $^{\circ}\text{C}$ 48-600 V / 4-30 V DC 2-phase controlled screw terminal blocking voltage 1200 V

product brand name	SIRIUS
product designation	solid-state contactor
design of the product	two-phase controlled
product type designation	3RF24
manufacturer's article number	
_2 of the accessories that can be ordered	3RF2900-0EA18
product designation	
_2 of the accessories that can be ordered	converter
General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
 at AC in hot operating state 	44 W
 at AC in hot operating state per pole 	14.67 W
 without load current share typical 	0.9 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage	
 of the operating voltage 	AC
of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
protection class IP	IP20
protection class IP on the front according to IEC 60529	IP20
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4
Weight	0.338 kg
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	2
number of NC contacts for main contacts	0
type of voltage of the operating voltage	AC
operating voltage	
• at AC	
— at 50 Hz rated value	48 600 V
— at 60 Hz rated value	48 600 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %

operating range relative to the operating voltage at AC	
• at 50 Hz	40 660 V
• at 60 Hz	40 660 V
operational current	
• at AC-51 rated value	22 A
at AC-51 according to IEC 60947-4-3	15 A
 according to UL 508 rated value 	15 A
operational current minimum	500 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I2t value maximum	1 800 A²-s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1 at DC rated value maximum permissible	30 V
control supply voltage 1 at DC	4 30 V
control supply voltage	
at DC initial value for signal <1> detection	4 V
at DC full-scale value for signal<0> recognition	1 V
symmetrical line frequency tolerance	5 Hz
control current at minimum control supply voltage	
• at DC	22 mA
control current at DC rated value	30 mA
ON-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	, additionally man, one hall trave
·	normally open contact (NO)
type of switching contact	normally open contact (NO) 0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	
Installation/ mounting/ dimensions	Voc
fastening method side-by-side mounting fastening method	Yes screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
design of the thread of the screw for securing the equipment	M4
height	100 mm
width	45 mm
depth	117 mm
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	, , , , , , , , , , , , , , , , , , ,
• for main contacts	
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
— finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
for AWG cables for main contacts	2x (1 2.3 min), 2x (2.3 6 min), 1x 10 min 2x (14 10)
connectable conductor cross-section for main contacts	£/\(\tau\)
	0.5 2.5 mm²
solid or stranded finally stranded with earn and pressessing	0.5 2.5 mm ²
finely stranded with core end processing	0.5 1.5 mm ²
finely stranded without core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	
for auxiliary and control contacts	
eelid	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
— solid— finely stranded with core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)

• for AWG cables for auxiliary and control contacts AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [Ibf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts • of the auxiliary and control contacts • for main contacts • for auxiliary and control contacts 7 mm 7 mm Electrical Safety protection class IP on the front according to IEC 60529 IP20 Ambient conditions installation altitude at height above sea level maximum 1 000 n ambient temperature • during operation • during storage • due to burst according to IEC 61000-4-4 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to bigh-frequency radiation according to IEC 61000-4-6 • due to bigh-frequency radiation according to IEC 61000-4-6 • due to bigh-frequency radiation according to IEC 61000-4-6 • due to bigh-frequency radiation according to IE	N·m f·in
AWG number as coded connectable conductor cross section for main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [IbF·in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • for he auxiliary and control contacts • for he auxiliary and control contacts • for main contacts • for main contacts • for main contacts • for auxiliary and control contacts • fingers Ambient conditions installation altitude at height above sea level maximum 1 000 number conditions installation altitude at height above sea level maximum 1 000 number conditions installation altitude at height above sea level maximum 1 000 number conditions installation altitude at height above sea level maximum 1 000 number con	m N·m
main contacts tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts * of the auxiliary and control contacts * for auxiliary and control c	N·m f·in
• for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts • of the auxiliary and control contacts • of the auxiliary and control contacts * for main contacts • for main contacts • for main contacts • for main contacts • for auxiliary and control contacts * for main contacts * for	N·m f·in
• for auxiliary and control contacts with screw-type terminals tightening torque [ibf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts * of the auxiliary and control contacts * of main contacts • for main contacts • for auxiliary and control contacts * for main contacts • for auxiliary and control contacts * for main contacts * 7 mm * Electrical Safety protection class IP on the front according to IEC 60529 IP20 touch protection on the front according to IEC 60529 finger-s Ambient conditions installation altitude at height above sea level maximum * 1 000 n ambient temperature • during operation • during storage * -25 4 • due to burst according to IEC 61000-4-4 • due to conductor-compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-6 • due to conductor-conductor surge according to IEC 61000-4-6 • due to conductor-conductor surge according to IEC 61000-4-6 • due to burst according to IEC 61000-4-7 • due to conductor-conductor surge according to IEC 61000-4-6 • due to conductor-conductor surge according to IEC 61000-4-6 • due to conductor-conductor surge according to IEC 61000-4-7 • due to conductor-conductor surg	N·m f·in
terminals tightening torque [lbf-in] • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts • of the auxiliary and control contacts * of the auxiliary and control contacts * for main contacts • for main contacts • for auxiliary and control contacts * for auxiliary and control contacts * for auxiliary and control contacts * protection class IP on the front according to IEC 60529 IP20 touch protection on the front according to IEC 60529 Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage * Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	f-in
for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw for main contacts of the auxiliary and control contacts for main contacts for main contacts for main contacts for main contacts for auxiliary and control contacts for auxiliary and control contacts for auxiliary and control contacts Felectrical Safety protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 finger-s Ambient conditions installation altitude at height above sea level maximum ambient temperature during operation during storage Felectromagnetic compatibility conducted interference due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 conducted HF interference emission according to Class According to IEC 61000-4-2 e of back-up R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 3	
• for auxiliary and control contacts with screw-type terminals design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts * of the auxiliary and control contacts * of main contacts • for auxiliary and control contacts * For auxiliary and contacts * For auxiliary and contacts * For auxiliary and contacts * For auxiliary	
design of the thread of the connection screw • for main contacts • of the auxiliary and control contacts • for main contacts • for main contacts • for main contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts Electrical Safety protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 finger-s Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emission according to Class A CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	bf·in
• for main contacts • of the auxiliary and control contacts • of the auxiliary and control contacts • for main contacts • for main contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • for auxiliary and control contacts • finger-s • for auxiliary and control contacts • for auxiliary and contacts • fo	
stripped length of the cable	
stripped length of the cable	
• for main contacts • for auxiliary and control contacts • for auxiliary and control contacts Flectrical Safety protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage Flectromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A Class A Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of buck-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	
For auxiliary and control contacts For auxiliary and control contacts	
Electrical Safety protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 finger-s Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 to conducted HF interference emissions according to Class A C	
protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 finger-s Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage -55 + Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A CISPR11 field-bound HF interference emission according to CISPR11 Class A Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	
touch protection on the front according to IEC 60529 Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A Class	
touch protection on the front according to IEC 60529 Ambient conditions installation altitude at height above sea level maximum ambient temperature • during operation • during storage Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A Class	
installation altitude at height above sea level maximum ambient temperature during operation during storage Electromagnetic compatibility conducted interference due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 due to chigh-frequency radiation according to IEC 61000-4-5 due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A CISPR11 field-bound HF interference emission according to CISPR11 Class A Short-circuit protection, design of the fuse link manufacturer's article number of full range R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable a conductor protection at cylindrical design 14 x 51 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	e, for vertical contact from the front
ambient temperature • during operation • during storage Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A ClsPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	
ambient temperature • during operation • during storage Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A ClsPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	
 during operation during storage 55 + Electromagnetic compatibility conducted interference due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 due to high-frequency radiation according to IEC 61000-4-2 electrostatic discharge according to IEC 61000-4-2 due to high-frequency radiation according to IEC 61000-4-8 electrostatic discharge according to IEC 61000-4-2 due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 due to high-frequency radiation according to IEC 61000-4-5 due to high-frequency radiation according to IEC 61000-4-2 due to high-frequency radiation according to IEC 61000-	
electromagnetic compatibility conducted interference e due to burst according to IEC 61000-4-4 e due to conductor-earth surge according to IEC 61000-4-5 e due to conductor-conductor surge according to IEC 61000-4-5 e due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number e of full range R fuse link for semiconductor protection at NH design usable e of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable e of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable e of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	°C.
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A CISPR11 field-bound HF interference emission according to CISPR11 Class A Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	
conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 • due to high-frequency radiation according to IEC 61000-4-6 • electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	
• due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 3NC14:	
 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number of full range R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design us able of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 3NC14: 	Hz behavior criterion 2
 due to conductor-conductor surge according to IEC 61000-4-5 due to high-frequency radiation according to IEC 61000-4-6 electrostatic discharge according to IEC 61000-4-2 due to high-frequency radiation according to IEC 61000-4-2 electrostatic discharge according to IEC 61000-4-2 due to high-frequency radiation according to Class A KV conducted HF interference emissions according to Class A Class A	
• due to high-frequency radiation according to IEC 61000- 4-6 electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A Class	vior criterion 2
electrostatic discharge according to IEC 61000-4-2 conducted HF interference emissions according to Class A C	vior criterion 2
conducted HF interference emissions according to CISPR11 field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	
CISPR11 field-bound HF interference emission according to CISPR11 Class A Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 3NC14:	in the frequency range 0.15 80 MHz, behavior criterion 1
Short-circuit protection, design of the fuse link manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	in the frequency range 0.15 80 MHz, behavior criterion 1 act discharging / 8 kV air discharging, behavior criterion 2
manufacturer's article number • of full range R fuse link for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	
of full range R fuse link for semiconductor protection at NH design usable of full range R fuse link for semiconductor protection at cylindrical design usable of back-up R fuse link for semiconductor protection at NH design usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	act discharging / 8 kV air discharging, behavior criterion 2
NH design usable • of full range R fuse link for semiconductor protection at cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment
cylindrical design usable • of back-up R fuse link for semiconductor protection at NH design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment
design usable • of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	nct discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
cylindrical design 10 x 38 mm usable • of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable 3NC14:	nct discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
cylindrical design 14 x 51 mm usable	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
of back-up R fuse link for semiconductor protection at	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
cylindrical design 22 x 58 mm usable	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
manufacturer's article number of the gG fuse at NH design usable	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
• up to 460 V 3NA380 relays	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
Approvals Certificates	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment
General Product Approval	act discharging / 8 kV air discharging, behavior criterion 2 r industrial environment r industrial environment





Confirmation







other

Environment

Type Test Certificates/Test Report

Confirmation



Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2420-1AB45


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2420-1AB45


 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$


https://support.industry.siemens.com/cs/ww/en/ps/3RF2420-1AB45

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2420-1AB45&lang=en

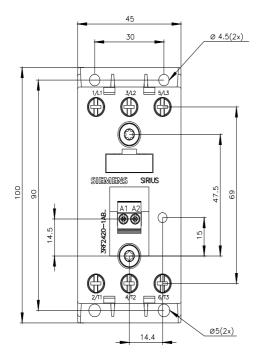

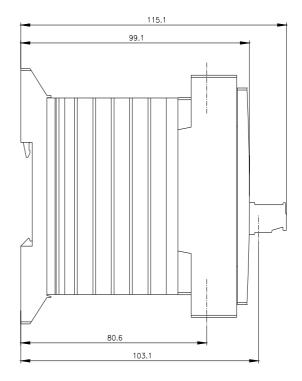

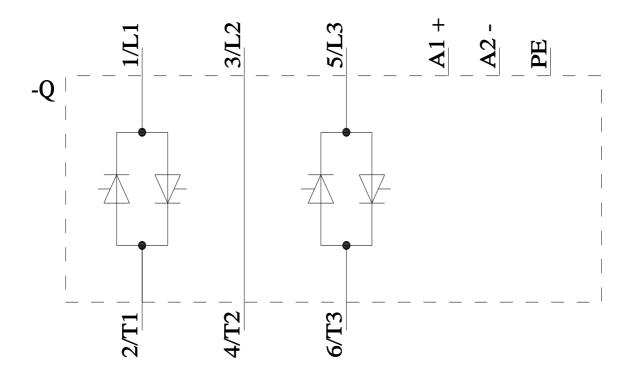

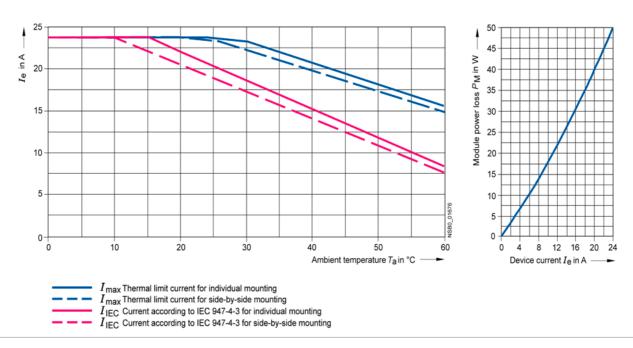

last modified: 8/12/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RF24201AB45