SIEMENS

Data sheet



ET 200pro ERSE/RSSE HF electronic reversing starter electronic (soft-) switching Full motor protection consisting of: electronic Overload protection + thermistor AC-3, 5.5 kW / 400 V 1.5 A...(9 A)12 A Brake contact 400 V AC 4 DI Han Q4/2 - Han Q8/0

product brand name	SIMATIC
product designation	Motor starters
design of the product	reversing starter
product type designation	ET 200pro
General technical data	
product function on-site operation	Yes
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
protection class IP	IP65
shock resistance	15g / 11 ms
vibration resistance	2g
mechanical service life (operating cycles) of the main contacts typical	30 000 000
type of assignment	1
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8 2-Methyl-1-(4-methylthiophenyl)-2-morpho - 71868-10-5 Bleititanzirkonoxid - 12626-81-2 2,2',6,6'-Tetrabrom-4,4'-isopropylidendi - 79-94-7
product function	
direct start	No
reverse starting	Yes
product component motor brake output	Yes
product feature	
 brake control with 230 V AC 	No
 brake control with 400 V AC 	Yes
 brake control with 24 V DC 	No
 brake control with 180 V DC 	No
 brake control with 500 V DC 	No
type of voltage of the supply voltage for brake control required	AC
supply voltage for brake control required	400 V
product function short circuit protection	Yes
design of short-circuit protection	fuse
maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	100 000 A
Safety related data	

B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	50 %
 with high demand rate according to SN 31920 	75 %
failure rate [FIT]	
 with low demand rate according to SN 31920 	100 FIT
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
design of the switching contact	solid-state / thyristor / 2 phases
adjustable current response value current of the current- dependent overload release	1.5 12 A
type of the motor protection	full motor protection
type of voltage	AC
operating voltage rated value	200 400 V
operating range relative to the operating voltage at AC at 50 Hz	200 440 V
operational current	
• at AC at 400 V rated value	12 A
 at AC-3 at 400 V rated value 	12 A
operating power	
at AC-3 at 400 V rated value	5 500 W
operating power for 3-phase motors at 400 V at 50 Hz	700 5 500 W
Inputs/ Outputs	
product function	
digital inputs parameterizable	Yes
digital inputs parameterizable digital outputs parameterizable	No
	4
number of digital inputs number of sockets	4
	0
• for digital output signals	0
• for digital input signals	4
Supply voltage	DC.
type of voltage of the supply voltage	DC 24 24 V
type of voltage of the supply voltage supply voltage 1 at DC	DC 24 24 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible	24 24 V 20.4 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible	24 24 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control	24 24 V 20.4 V 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage	24 24 V 20.4 V 28.8 V DC
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value	24 24 V 20.4 V 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 1.656 W
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 1.656 W
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 1.656 W
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit — without bypass circuit — without bypass circuit — without bypass circuit	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 1.656 W 1.656 W 6.84 W
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit — without bypass circuit — without bypass circuit — without bypass circuit	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 1.656 W 1.656 W 6.84 W
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 21.656 W 1.656 W 6.84 W 5.328 W
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit — without bypass circuit Installation/ mounting/ dimensions mounting position fastening method	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal screw fixing
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit — without bypass circuit Installation/ mounting/ dimensions mounting position fastening method height	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 5.328 W vertical, horizontal screw fixing 230 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit without bypass circuit Installation/ mounting/ dimensions mounting position fastening method height width	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal screw fixing 230 mm 110 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal screw fixing 230 mm 110 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal screw fixing 230 mm 110 mm 160 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value • minimum permissible • maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 • at DC rated value • at DC power loss [W] in auxiliary and control circuit • in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit Installation/ mounting/ dimensions mounting position fastening method height width depth Ambient conditions installation altitude at height above sea level maximum	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal screw fixing 230 mm 110 mm 160 mm
type of voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 4 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal screw fixing 230 mm 110 mm 160 mm
type of voltage of the supply voltage supply voltage 1 at DC supply voltage 1 at DC rated value	24 24 V 20.4 V 28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.656 W 1.656 W 6.84 W 5.328 W vertical, horizontal screw fixing 230 mm 110 mm 160 mm 3 500 m

relative humidity during operation	5 95 %
Communication/ Protocol	
protocol is supported	
PROFIBUS DP protocol	Yes
PROFINET protocol	Yes
design of the interface PROFINET protocol	Yes
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function	
 supports PROFlenergy measured values 	Yes
 supports PROFlenergy shutdown 	Yes
address space memory of address range	
• of the inputs	2 byte
• of the outputs	2 byte
type of electrical connection of the communication interface	via backplane bus
Connections/ Terminals	
type of electrical connection	
for main current circuit	tab terminals
type of electrical connection	
 1 for digital input signals 	M12 socket
 2 for digital input signals 	M12 socket
 3 for digital input signals 	M12 socket
4 for digital input signals	M12 socket
type of electrical connection	
 at the manufacturer-specific device interface 	optical interface
 for main energy infeed 	socket according to ISO23570
 for load-side outgoing feeder 	socket according to ISO23570
 for main energy transmission 	socket according to ISO23570
 for supply voltage line-side 	via backplane bus
 for supply voltage transmission 	via backplane bus
UL/CSA ratings	
operating voltage at AC at 60 Hz according to CSA and UL rated value	480 V
Certificates/ approvals	

General Product Approval

EMC

Declaration of Conformity

Confirmation











Declaration of Conformity

Test Certificates

other



Type Test Certific-ates/Test Report

Confirmation

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)


https://www.siemens.com/ic10


Industry Mall (Online ordering system)

 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS70-3AA3}$

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5LS70-3AA3

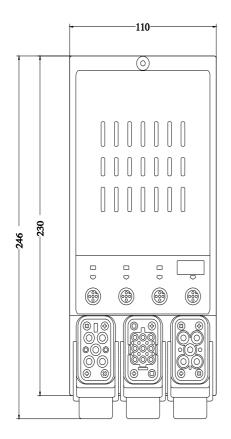

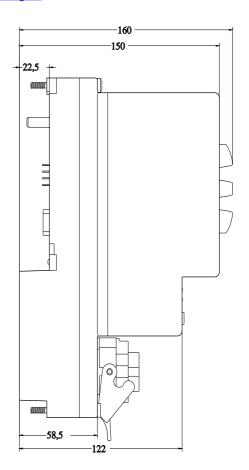

last modified: 8/7/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RK13045LS703AA3