SIEMENS

Data sheet 3RN2013-2BW30



thermistor motor protection relay standard evaluation unit 22.5 mm enclosure spring-loaded terminal 2 changeover contacts Us = 24 V-240 V AC/DC manual/auto/remote RESET with ATEX approval 2 LEDs (ready/tripped) safe electrical isolation test/RESET button wire-break monitoring short-circuit monitoring non-volatile

product brand name	SIRIUS
product category	SIRIUS 3RN2 thermistor motor protection
product designation	Thermistor motor protection relay
design of the product	Standard evaluation unit with ATEX approval, open-circuit and short-circuit detection in the sensor circuit, safe disconnection, non-volatile
product type designation	3RN2
General technical data	
product function	thermistor motor protection
display version LED	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	1.7 W
 at DC in hot operating state 	1.7 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
 between auxiliary and auxiliary circuit 	300 V
 between control and auxiliary circuit 	300 V
shock resistance according to IEC 60068-2-27	11g / 15 ms
vibration resistance according to IEC 60068-2-6	10 55 Hz: 0.35 mm
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
thermal current of the switching element with contacts maximum	5 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1
Weight	0.177 kg
Product Function	
product function	
• error memory	Yes
 dynamic open-circuit detection 	Yes
external reset	Yes
• auto-RESET	Yes
• manual RESET	Yes
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	

a at EO Hz rotad value	24 240 \/
at 50 Hz rated value at 60 Hz rated value	24 240 V
at 60 Hz rated value control cumply voltage at DC rated value.	24 240 V
control supply voltage at DC rated value	24 240 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
initial value	0.85
full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
initial value	0.85
full-scale value	1.1
inrush current peak	
● at 24 V	0.7 A
• at 240 V	12 A
duration of inrush current peak	
• at 24 V	0.25 ms
• at 240 V	0.2 ms
Measuring circuit	
buffering time in the event of power failure minimum	40 ms
Precision	
relative metering precision	2 %
Auxiliary circuit	
material of switching contacts	AgSnO2
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	2
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
Main circuit	
operating frequency rated value	50 60 Hz
ampacity of the output relay at AC-15 at 250 V at 50/60 Hz	3 A
ampacity of the output relay at DC-13	
ampacity of the output relay at DC-13 • at 24 V	1.A
• at 24 V • at 125 V	0.2 A
• at 24 V	
at 24 V at 125 V continuous current of the DIAZED fuse link of the output	0.2 A
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay	0.2 A
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility	0.2 A
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference	0.2 A 6 A
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports)
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground)
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line)
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line)
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at the due to burst according to IEC 61000-4-4 at the due to conductor-earth surge according to IEC 61000-4-5 at the due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge Protective separation Yes
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge Protective separation Yes Yes
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge Protective separation Yes Yes
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge Protective separation Yes Yes Yes
at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference at due to burst according to IEC 61000-4-4 at due to conductor-earth surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-5 at due to conductor-conductor surge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation abetween input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (Add) failure rate [FIT] at rate of non-recognizable hazardous	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge Protective separation Yes Yes Yes Yes
 at 24 V at 125 V continuous current of the DIAZED fuse link of the output relay Electromagnetic compatibility conducted interference due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (λdd) failure rate [FIT] at rate of non-recognizable hazardous failures (λdu) 	0.2 A 6 A 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) 6 kV contact discharge / 8 kV air discharge Protective separation Yes Yes Yes Yes 1.8 E-8 1/h 3.08E-7 1/h

MTTFd	303 a
IEC 62061	
Safety Integrity Level (SIL) according to IEC 62061	SIL 1
PFHD with high demand rate according to IEC 62061	3.76E-7 1/h
ISO 13849	5.10E 7 IM
performance level (PL) according to EN ISO 13849-1	PL c
category according to EN ISO 13849-1	1
performance level (PL) according to ISO 13849-1	PL c
IEC 61508	
Safety Integrity Level (SIL) according to IEC 61508	1
safety device type according to IEC 61508-2	Type B
PFDavg with low demand rate according to IEC 61508	0.0041
Safe failure fraction (SFF)	74 %
hardware fault tolerance according to IEC 61508	0
T1 value for proof test interval or service life according to IEC	3 a
61508	σα
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	spring-loaded terminal (push-in)
for auxiliary and control circuit	spring-loaded terminals (push-in)
type of connectable conductor cross-sections	
• solid	0.5 4 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
 finely stranded without core end processing 	0.5 4 mm²
 for AWG cables solid 	20 12
 for AWG cables stranded 	20 12
connectable conductor cross-section	
• solid	0.5 4 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
 finely stranded without core end processing 	0.5 4 mm²
AWG number as coded connectable conductor cross	
AWG number as coded connectable conductor cross section	20 12
AWG number as coded connectable conductor cross section • solid	20 12 20 12
AWG number as coded connectable conductor cross section • solid • stranded	20 12 20 12
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions	20 12
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position	20 12 any
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method	20 12 any screw and snap-on mounting onto 35 mm DIN rail
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height	any screw and snap-on mounting onto 35 mm DIN rail 100 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth	any screw and snap-on mounting onto 35 mm DIN rail 100 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — backwards — upwards — downwards — at the side • for grounded parts — forwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — backwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — backwards — backwards — upwards — oforwards — at the side • for grounded parts — backwards — backwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — upwards — at the side — upwards — at the side — downwards — at the side — at the side — downwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — backwards — upwards — at the side • for grounded parts — backwards — backwards — upwards — backwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — at the side — downwards — at the side — downwards • for live parts — forwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — backwards — at the side — downwards — at the side — forwards — at the side — downwards • for live parts — forwards — backwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — at the side — downwards — at the side — downwards • for live parts — forwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — oupwards — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — downwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 m
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • of or grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards • for live parts — forwards — backwards — backwards — backwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 m

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-40 +85 °C
during transport	-40 +85 °C
relative humidity during operation maximum	70 %
explosion protection category for dust	[Ex t] [Ex p]
explosion protection category for gas	[Ex e] [Ex d] [Ex px]

Approvals Certificates

General Product Approval

EMV













For use in hazardous locations

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report







other

Environment

Confirmation

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RN2013-2BW30

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RN2013-2BW30

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RN2013-2BW30


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RN2013-2BW30&lang=en

Characteristic: Derating


https://support.industry.siemens.com/cs/ww/en/ps/3RN2013-2BW30/manual

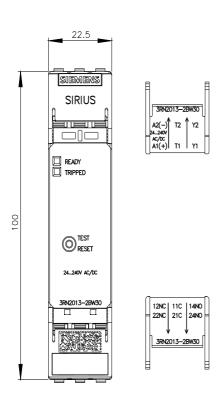

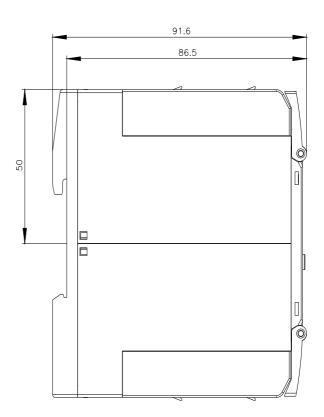

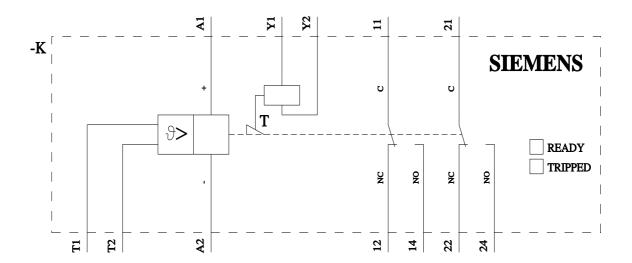

last modified: 4/17/2025 🖸

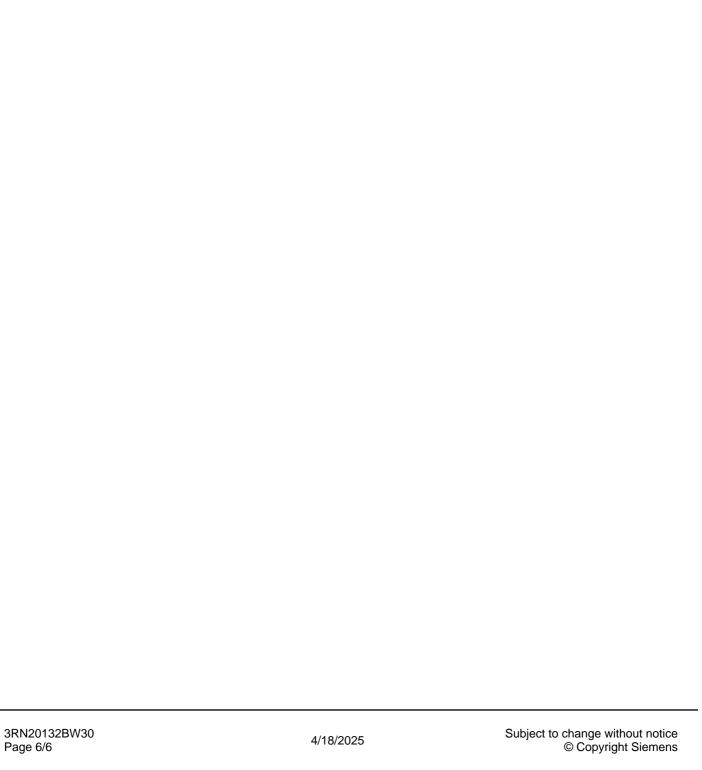

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RN20132BW30