SIEMENS

Data sheet 3RN2023-2DW30



Thermistor motor protection relay Device for warning and switching-off 22.5 mm enclosure Spring-type terminal 1 NO contact + 1 CO contact US = 24 V-240 V AC/DC Manual/Auto/Remote reset with ATEX approval 3 LEDs (READY/WARNING/TRIPPED) Safe galvanic isolation Test/reset button Wire break monitoring Short circuit monitoring non-volatile 2 separate PTC sensor circuits

product brand name	SIRIUS
product category	SIRIUS 3RN2 thermistor motor protection
product designation	Thermistor motor protection relay
design of the product	Standard evaluation unit with ATEX approval and 2 sensor circuits for warning and disconnection, open-circuit and short-circuit detection in both sensor circuits, safe disconnection, non-volatile
product type designation	3RN2
General technical data	
product function	thermistor motor protection
display version LED	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	1.8 W
at DC in hot operating state	1.8 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
 between auxiliary and auxiliary circuit 	300 V
 between control and auxiliary circuit 	300 V
shock resistance according to IEC 60068-2-27	11g / 15 ms
vibration resistance according to IEC 60068-2-6	10 55 Hz: 0.35 mm
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
thermal current of the switching element with contacts maximum	5 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/28/2009
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	0.18 kg
Product Function	
product function	
• error memory	Yes
 dynamic open-circuit detection 	Yes
external reset	Yes
• auto-RESET	Yes
manual RESET	Yes
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	

a at EO Ha rated value	24 240 V
at 50 Hz rated value at 60 Hz rated value	24 240 V
at 60 Hz rated value anticle upply valtes at DC rated value.	24 240 V
control supply voltage at DC rated value	24 240 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
initial value	0.85
full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
initial value	0.85
full-scale value	1.1
inrush current peak	
● at 24 V	0.7 A
• at 240 V	12 A
duration of inrush current peak	
• at 24 V	0.25 ms
• at 240 V	0.2 ms
Measuring circuit	
buffering time in the event of power failure minimum	30 ms
Precision	
relative metering precision	2 %
Auxiliary circuit	
material of switching contacts	AgSnO2
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	1
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
Main circuit	
operating frequency rated value	50 60 Hz
ampacity of the output relay at AC-15 at 250 V at 50/60 Hz	3 A
ampacity of the output relay at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
continuous current of the DIAZED fuse link of the output	6 A
relay	
Electromagnetic compatibility	
conducted interference	
 due to burst according to IEC 61000-4-4 	2 kV (power ports) / 1 kV (signal ports)
due to conductor-earth surge according to IEC 61000-4-5	2 kV (line to ground)
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV (line to line)
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
0.1	5
Galvanic isolation	
design of the electrical isolation	Protective separation
design of the electrical isolation	
design of the electrical isolation galvanic isolation	Protective separation
design of the electrical isolation galvanic isolation • between input and output	Protective separation Yes
design of the electrical isolation galvanic isolation • between input and output • between the outputs	Protective separation Yes Yes
design of the electrical isolation galvanic isolation • between input and output • between the outputs • between the voltage supply and other circuits	Protective separation Yes Yes
design of the electrical isolation galvanic isolation • between input and output • between the outputs • between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures	Protective separation Yes Yes Yes
design of the electrical isolation galvanic isolation • between input and output • between the outputs • between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (\lambdadd) failure rate [FIT] at rate of non-recognizable hazardous	Protective separation Yes Yes Yes Yes 6.8E-8 1/h
design of the electrical isolation galvanic isolation	Protective separation Yes Yes Yes Yes 6.8E-8 1/h 3.08E-7 1/h

MTTFd	303 a
IEC 62061	
Safety Integrity Level (SIL) according to IEC 62061	SIL 1
PFHD with high demand rate according to IEC 62061	3.76E-7 1/h
ISO 13849	5.10E 7 IM
performance level (PL) according to EN ISO 13849-1	PL c
category according to EN ISO 13849-1	1
performance level (PL) according to ISO 13849-1	PL c
IEC 61508	
Safety Integrity Level (SIL) according to IEC 61508	1
safety device type according to IEC 61508-2	Type B
PFDavg with low demand rate according to IEC 61508	0.0041
Safe failure fraction (SFF)	74 %
hardware fault tolerance according to IEC 61508	0
T1 value for proof test interval or service life according to IEC	3 a
61508	σα
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	spring-loaded terminal (push-in)
for auxiliary and control circuit	spring-loaded terminals (push-in)
type of connectable conductor cross-sections	
• solid	0.5 4 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
 finely stranded without core end processing 	0.5 4 mm²
 for AWG cables solid 	20 12
 for AWG cables stranded 	20 12
connectable conductor cross-section	
• solid	0.5 4 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
 finely stranded without core end processing 	0.5 4 mm²
AWG number as coded connectable conductor cross	
AWG number as coded connectable conductor cross section	20 12
AWG number as coded connectable conductor cross section • solid	20 12 20 12
AWG number as coded connectable conductor cross section • solid • stranded	20 12 20 12
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions	20 12
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position	20 12 any
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method	20 12 any screw and snap-on mounting onto 35 mm DIN rail
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height	any screw and snap-on mounting onto 35 mm DIN rail 100 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth	any screw and snap-on mounting onto 35 mm DIN rail 100 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — backwards — upwards — downwards — at the side • for grounded parts — forwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — backwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — backwards — backwards — upwards — oforwards — at the side • for grounded parts — backwards — backwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — upwards — at the side — upwards — at the side — downwards — at the side — at the side — downwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — backwards — backwards — upwards — at the side • for grounded parts — backwards — backwards — upwards — backwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — at the side — downwards — at the side — downwards • for live parts — forwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — backwards — at the side — downwards — at the side — forwards — at the side — downwards • for live parts — forwards — backwards — backwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — at the side — downwards — at the side — downwards • for live parts — forwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • for grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — oupwards — downwards • for live parts — forwards — backwards — upwards — backwards — upwards — downwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 m
AWG number as coded connectable conductor cross section • solid • stranded Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — at the side • of or grounded parts — forwards — backwards — upwards — at the side — downwards • for live parts — forwards — backwards — backwards — upwards • for live parts — forwards — backwards — backwards — backwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 m

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-40 +85 °C
during transport	-40 +85 °C
relative humidity during operation maximum	70 %
explosion protection category for dust	[Ex t] [Ex p]
explosion protection category for gas	[Ex e] [Ex d] [Ex px]

Approvals Certificates

General Product Approval







Confirmation





EMV

For use in hazardous locations

Test Certificates

Marine / Shipping







Type Test Certificates/Test Report





Marine / Shipping

other

Environment



Confirmation

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RN2023-2DW30

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RN2023-2DW30

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RN2023-2DW30


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RN2023-2DW30&lang=en

Characteristic: Derating

https://support.industry.siemens.com/cs/ww/en/ps/3RN2023-2DW30/manual

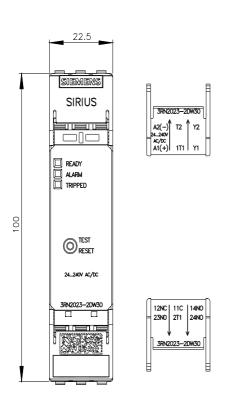

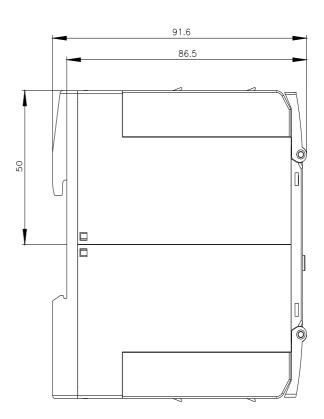

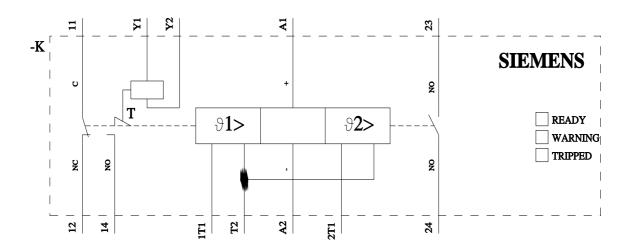

last modified: 12/10/2024 🖸



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RN20232DW30