SIEMENS

Data sheet

3RP2505-2CW30



Timing relay, Multifunction 1 NO semiconductor 13 functions 7 time ranges (0.05 s...100 h) 12-240 V AC/DC at 50/60 Hz AC with LED, Spring-type terminal (pushin)

product brand name	SIRIUS
product designation	timing relay
design of the product	13 functions
product type designation	3RP25
General technical data	
product component	
 relay output 	No
semi-conductor output	Yes
product extension required remote control	No
product extension optional remote control	No
power loss [W] maximum	2 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
test voltage for isolation test	2.5 kV
degree of pollution	3
surge voltage resistance rated value	4 000 V
shock resistance according to IEC 60068-2-27	11g / 15 ms
vibration resistance according to IEC 60068-2-6	10 55 Hz / 0.35 mm
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	300 000
adjustable time	0.05 s 100 h
relative setting accuracy relating to full-scale value	5 %; +/-
thermal current	1 A
minimum ON period	35 ms
recovery time	400 ms
reference code according to IEC 81346-2	К
relative repeat accuracy	1 %; +/-
influence of the surrounding temperature	1% in the whole temperature range to the set runtime
power supply influence	1% in the whole voltage range to the set runtime
Substance Prohibitance (Date)	09/12/2014
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1
Weight	0.136 kg
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage 1 at AC	
● at 50 Hz	12 240 V
• at 60 Hz	12 240 V
control supply voltage frequency 1	50 60 Hz


spectral range factor control supply voltage rated value at 6 (directar value) 0.8 outpet rate value 1.1 Operating range factor control supply voltage rated value at 6 (directar value) 0.8 outpet rate value 1.1 Operating range factor control supply voltage rated value at 6 (directar value) 0.8 outpet rate value 1.1 Operating range factor control supply voltage rated value at 6 (directar value) 0.8 outpet rate value 1.1 Operating range factor control supply voltage rated value at 6 (directar value) 0.8 outpet rate value 0.8		
production 0.8 • wind value 0.8	control supply voltage 1 at DC	12 240 V
• Initial value0 8• Initial value1• Addition of the Control supply voltage rated value distribution8• Initial value0.8• Initial value0.9• In		
• Initial-cale value1actional procession supply voltage rated value at procession factor control supply voltage rated value8• Initial-cale value1• Initial-cale value1• Initial-cale value0• Initial-cale value <td></td> <td>0.8</td>		0.8
percent prior prior factor control supply voltage rated value at • inflati value0.8• inflati value0.5 A• inflati value0.5 A• inflati value0.4 ms• inflati value0.4 ms• inflati value0.5 ms• out of the transformed part0.4 ms• inflati value0.5 ms• out of the transformed partVelocitation• out of the transformed partVelocitation• out of the transformed part of the transf		
AC at for kar Initial value • initial value 0.8 • initial value 0.5 A • initial value 0.4 A • OFF delay 0.5 A • of SF delay No • of SF delay No • of SF delay No <td></td> <td></td>		
• All-cale value1genering reproduction supply voltage rated value8• Initial value0.8• Initial value1.1inush current pask0.5 A• • 1.2 24 V0.5 A• • 1.2 24 V0.4 ms• • 1.2 24 V0.4 ms• • 1.2 24 V0.4 ms• • 1.2 40 V0.4 ms• • 0.4 day8• • 0.4 day8• • 0.4 day8• 0.4 day9• 0.4 day9 <td></td> <td></td>		
operating range factor control supply voltage rated value at initial value initial	● initial value	0.8
AC at doits Initial value Initial value 0.8 Initial value 1.1 Innush current poak 5.4 I 2240 V 5.4 I 2240 V 0.5 A I 2240 V 0.5 A I 2240 V 0.4 ma Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Value Va	• full-scale value	1.1
niniti value0.8 1.1invisit varue1.4invisit varue pak5.4- at 24 V0.5 Å- at 24 V0.5 Å- at 24 V0.5 ms- at 26 VVes- at 26 VVes- of 0.4 delayYes- of 0.4 delayYes- of 0.4 delayYes- of 0.4 delayNo- at 26 VNo- of 0.4 delayYes- of 0.4 delayYes- of 0.4 delayNo- of 0.4 delayNo- of 0.4 delayYes- of 0.4 delayNo- of 0.4 delayYes- of 0.4 delayNo- of 0.4 delay with interval stat/instantaneousNo- of 0.4 delay with puble statYes- of 0.4 delay with puble statNo- of 0.4 delay with puble statNo- of 0.4 delay with puble statNo- of 0.4 delay with of 0.4 delay withYes- of 0.4 delay with 0.4 delay timeYes- of 0.4 delay with 0.4 delay timeNo- of 0.4 delay with 0.4 delay timeNo- of 0.4 delay with 0.4 delay timeNo- of 0.4 delay with 0.4 delay timeNo	operating range factor control supply voltage rated value at	
• full-scale value1.1invasit varient pok0.5 A• all 24 V0.5 A• all 24 V0.5 A• all 24 V0.5 m• all 24 V0.5 ms• oll dially instantianeous contactNo• oll dially symmetrically with interval startificataneousNo• all shing symmetrically with puise startYes• all shing symmetrically with puise startNo• all shing symmetrically with puise startNo <td< td=""><td>AC at 60 Hz</td><td></td></td<>	AC at 60 Hz	
initial current peak > • al 24 V 0.5 A • al 24 V 0.5 A duration of Inrush current peak > • al 24 V 0.4 m. • al 24 V 0.5 m. • al 24 V 0.5 m. • al 24 V 0.5 m. • all 24 V V • All 24 V V • All 24 V V • all 24 V No • all 24 V No • all 24 V No • all 24 V V V • all 24 V V No • all 24 V V No • all 24 V V No		
• 124 V0.5 A 5A• 1240 V5A• 1240 V0.4 ms• 1240 V0.5 msSwitching function5 msSwitching functionVs• 0.Nd-dayYs• 0.Nd-day <td></td> <td>1.1</td>		1.1
• a1240 ∨ 5 A duration of incush current peak 0.4 ms • a124 ∨ 0.4 ms • a1240 ∨ 0.5 ms Switching function - • ON-delay/instantaneous contact No • ON-delay/instantaneous contact No • ON-delay/instantaneous contact No • ON-delay/instantaneous contact No • OR-delay/instantaneous No • Instaining symmetrically with interval start/instantaneous No • Instaining symmetrically with pulse start No • Instaining asymmetrically with pulse start No • Instaining asymmetrically with pulse start No • Instaining asymmetrically with interval start/instantaneous No • Instaining asymmetrically with interval start No • Instaining tercitori Yes • Instaining asymmetrically with interval start No • Instaining tercitori Yes •		
duration of inrush current peak 0.4 ms • id 24 V 0.4 ms • al 24 V 0.5 ms Switching Function - switching function Ves • ON-delay/instantaneous contact No • passing make contact No • passing make contact No • passing make contact No • of D-F delay No • alshing symmetrically with interval start instantaneous No • alshing symmetrically with interval start Yes • alshing symmetrically with pulse start Yes • alshing symmetrically with pulse start No • alshing symmetrically with interval start (start neta) No • alshing symmetrically with pulse start No • alshing symmetrically with pulse start No • star-delta circuit No • star-delta circuit No <t< td=""><td></td><td></td></t<>		
• 124 V0.4 ms 0.5 msside V0.5 msSwitching function-ewich desynstantaneous contactNo• ON-delayYes• ON-delay instantaneous contactNo• passing make contact/instantaneous contactNo• DEF delayNo• OFF delayNo• Switching functionVes• Isabing symmetrically with interval startinistantaneousNo• Isabing symmetrically with puice startinistantaneousNo• Isabing symmetrically with puice startYes• Isabing symmetrically with puice startNo• OFF delayYes• OFF delayNo• OFF delayNo <t< td=""><td></td><td>5 A</td></t<>		5 A
• at 240 V0.5 msSwitching Function• ON-delayYes• ON-delay/instantaneous contactNo• passing make contact/instantaneous contactNo• OFF delayYes• OFF delayNo• OFF delayNo• Switching functionYes• Instanting symmetrically with interval start/instantaneousNo• Satisting symmetrically with pulse start/instantaneousNo• Instanting symmetrically with pulse startYes• Instanting symmetrically with pulse startNo• Instanting functionYes• Instanting function startYes• Instanting function startYes• Delay (Start All and Could Start All All All All All All All All All Al	-	
Switching Function second		
switching function Ves • ON-delay Yes • ON-delay/instantaneous contact No • passing make contact/instantaneous contact No • OFF delay No • stabiling symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start finitiantaneous No • flashing symmetrically with pulse start Yes • flashing symmetrically with pulse start No • star-dela circuit No • star-dela circuit No • star-dela circuit No • star-dela circuit No • opsing break contact/instantaneous No • OFF delay Yes • passing break contact/instantaneous No • pulse delayed Yes • pulse delayed/instantaneous No • pulse delayed/instantaneous No • pulse delayed/instantaneous No • pulse d		U.5 ms
• ON-delayYes• ON-delay/instantaneous contactNo• passing make contact/instantaneous contactNo• OF delayNo• OFf delayNo• flashing symmetrically with interval start/instantaneousNo• flashing symmetrically with interval startYes• flashing symmetrically with interval startYes• flashing symmetrically with pulse start/instantaneousNo• flashing symmetrically with pulse startYes• flashing asymmetrically with pulse startNo• star-delta circultNo• star-delta circultYes• additive ON-delayYes• passing break contact/instantaneousNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo• Diplise delayed/instantaneousNo• pulse-shapingYes• pulse-shaping make contact/instantaneousNo• Diplise delayed/instantaneousNo• Ord delay/instantaneousNo• Diplise-shaping make contact/instantaneousNo• Diplise-shaping make contact/instantaneousNo• Diplise-shaping make contact/instantaneousNo• Diplise-shaping make contact/instantaneousNo <td></td> <td></td>		
• ON-delayNo• passing make contact/instantaneous contactYes• possing make contact/instantaneous contactNo• OFF delayNo• finishing symmetrically with interval start/instantaneousNo• finishing symmetrically with interval startYes• finishing symmetrically with pulse start/instantaneousNo• finishing symmetrically with pulse start/instantaneousNo• finishing symmetrically with pulse startNo• finishing asymmetrically with pulse startNo• finishing asymmetrically with pulse startNo• finishing asymmetrically with pulse startNo• start-delta circuit with delay timeNo• start-delta circuit with othery startNo• start-delta circuit with control signalYes• passing break contact/instantaneousNo• OFF delay/instantaneousNo• OFF delay/instantaneousNo• pulse delayedYes• pulse delayedYes• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• oN-delay/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• oN-delay/instantaneousNo• pulse delayed/instantaneous contactNo• pulse delayed/instantaneous contactNo• pulse delayed/instantaneous contactNo• pul	-	
• passing make contact/instantaneous contact Yes • oFF delay No switching function • • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with interval start Yes • flashing symmetrically with interval start No • start-delta circuit Yes • passing break contact Yes • passing break contact Yes • oFF delay Yes • oFF delay Yes • pulse delayed/instantaneous No • pulse delayed/instantaneous contact No • pulse delayed/instantaneous c	-	
passing make contact/instantaneous contact No oUFF delay No switching function No if abshing symmetrically with interval start/instantaneous No if abshing symmetrically with pulse start/instantaneous No if abshing symmetrically with pulse start Yes if abshing symmetrically with pulse start No if abshing asymmetrically with pulse start No if abshing asymmetrically with pulse start No switching function No etalt dela circuit with delay time No istar-delta circuit No switching function with control signal Fer etalt delay circuit with delay time No opassing break contact/instantaneous No oDFF delay Yes opassing break contact/instantaneous No ouise-shaping Yes pulse delayed Yes ouise-shaping Yes pulse-delay/instantaneous No ouise-shaping make contact/instantaneous No ouise-shaping/instantaneous No	-	
• OFF delayNoswitching functionswitching symmetrically with interval start/instantaneousYesinflashing symmetrically with pulse start/instantaneousNoinflashing symmetrically with pulse start/instantaneousNoinflashing asymmetrically with pulse startNoinflashing asymmetrically with pulse startNoinflashing asymmetrically with pulse startNoswitching functionswitching function with control signalNoswitching function with control signalYessardetta circuit with delay timeYeso dolitive ON-delayYeso DFF delay/instantaneousNoo OFF delay/instantaneousNoo OFF delay/instantaneousNoo DFF delay/instantaneousNoo DFF delay/instantaneousNoo pulse delayed/instantaneousNoo pulse delayed/instantaneousNoo pulse delayed/instantaneousNoo pulse delayed/instantaneousNoo DFF delay/instantaneousNoo DFF delay/instantaneousNoo DFF delay/instantaneousNoo pulse delayed/instantaneousNoo pulse delayed/instantaneousNoo pulse delayed/instantaneousNoo pulse delayed/instantaneousNoo pulse delayed/instantaneous contactYeso protringerable with decavated control signalYeso protringerable with activated control signalYeso retrotringerable with sulted-on control signalYes<		
switching function No • flashing symmetrically with interval start/instantaneous No • flashing symmetrically with pulse start (stantaneous) No • flashing symmetrically with pulse start (stantaneous) No • flashing symmetrically with pulse start Yes • flashing asymmetrically with pulse start No • flashing asymmetrically with pulse start No • star-delta circuit with delay time No • star-delta circuit with delay time No • star-delta circuit with control signal Yes • additive ON-delay Yes • passing break contact Yes • passing break contact/instantaneous No • DFF delay Yes • pulse delayed Yes • pulse delayed/instantaneous No • pulse delayed/instantaneous <td></td> <td></td>		
	•	No
• flashing symmetrically with interval startYes• flashing symmetrically with pulse start/instantaneousNo• flashing symmetrically with pulse startYes• flashing asymmetrically with pulse startNo• flashing asymmetrically with pulse startNo• star-delta circuitNo• star-delta circuit with delay timeNo• star-delta circuitNo• star-delta circuitYes• passing break contact/instantaneousNo• OFF delay/Yes• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse-shapingYes• pulse-shaping//instantaneousNo• pulse-shaping//instantaneousNo• oN-OH-delay/OFF-delay/instantaneousNo• pulse-shaping//instantaneousNo• pulse-shaping//instantaneousNo• pulse-shaping//instantaneousNo• passing make contact/instantaneousNo• pulse-shaping//instantaneousNo• pulse-shaping//instantaneousNo• passing make contact/instantaneousNo• pretoringerable with deactivated control signalYes <td< td=""><td>-</td><td></td></td<>	-	
• flashing symmetrically with pulse startNo• flashing symmetrically with pulse startYes• flashing asymmetrically with interval startNo• flashing asymmetrically with pulse startNo• star-delta circuit with delay timeNo• star-delta circuit with delay timeNo• star-delta circuit with delay timeNo• star-delta circuit or with control signalYes• additive ON-delayYes• passing break contactYes• passing break contact/instantaneousNo• OFF delayYes• OFF delay delayedYes• pulse delayedYes• pulse delayed/instantaneousNo• pulse delayed/instantaneous contactYes• pulse delayed/instantaneous contactNo• passing make contact/instantaneous contactNo• pretoriggerable with declavaled control signalYes• retroriggerable with edeclavaled control signalYes• retroriggerable with switched-on control signalYes• retroriggerable with switched-on		
• flashing symmetrically with interval startYes• flashing symmetrically with interval startNo• flashing asymmetrically with ubles startNo• switching functionNo• star-delta circuitNo• star-delta circuitNo• star-delta circuitNo• star-delta circuitYes• additive ON-delayYes• passing break contactYes• passing break contactYes• ofF delayYes• OFF delay/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse shaping/instantaneousNo• pulse shaping/instantaneousNo• pulse shaping/instantaneousNo• oftwice ontact/instantaneousNo• pulse shaping/instantaneousNo• pulse shaping/instantaneousNo• pulse shaping/instantaneousNo• pulse shaping/instantaneousNo• pulse shaping/instantaneousNo• pulse pulse contactYes• passing make contactNo• passing make contact leaveNo• pretortinggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes•		
• flashing asymmetrically with interval startNo• flashing asymmetrically with pulse startNoswitching functionNo• star-delta circuit with delay timeNo• additive ON-delayYes• passing break contact/instantaneousNo• OFF delayYes• OFF delayYes• pulse delayed/instantaneousNo• eitoriggerable with deactivated control signalYes• eitoriggerable with deactivated control signalYes• eitoriggerable with deactivated control signalYes• eitoriggerable with switched-on control sig		
• flashing asymmetrically with pulse start No switching function No • star-delta circuit with delay time No • star-delta circuit No switching function with control signal Ves • additive ON-delay Yes • passing break contact Yes • passing break contact/instantaneous No • OFF delay Yes • OFF delay Yes • pulse delayed Yes • pulse delayed Yes • pulse delayed/instantaneous No • pulse shaping Yes • pulse shaping/instantaneous No • pulse-shaping/instantaneous No • pulse-shaping/instantaneous No • pulse-shaping/instantaneous No • passing make contact/instantaneous No • passing make contact/instantaneous contact No • passing make contact/instantaneous contact No • passing make contact/instantaneous contact No • etrotriggerable with deadtivated control signal Yes • etrotriggerable with switched-on contro		
switching function No • star-delta circuit with delay time No • star-delta circuit No switching function with control signal Yes • additive ON-delay Yes • passing break contact Yes • passing break contact/instantaneous No • OFF delay Yes • OFF delay/instantaneous No • pulse delayed/instantaneous No • pulse delay/OFF-delay/instantaneous No • pulse delay/OFF-delay/instantaneous No • pulse delay/OFF-delay/instantaneous No • pulse-shaping/instantaneous No • passing make contact Yes • passing make contact No • passing make contact/instantaneous contact No • retrotriggerable with switched-on control signal Yes • retrotriggerable with switched-on control signal Yes • ret		
star-delta circuit with delay timeNo• star-delta circuitNoswitching function with control signalYes• additive ON-delayYes• passing break contactYes• passing break contact/instantaneousNo• OFF delayYes• DFF delay/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse shaping/instantaneousNo• pulse-shaping/instantaneousNo• pulse-shaping make contact/instantaneousNo• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated control signalYes• retrotriggerable with deactivated control signalYes <t< td=""><td></td><td>No</td></t<>		No
star-delta circuit No switching function with control signal Feason • additive ON-delay Yes • passing break contact Yes • passing break contact/instantaneous No • OFF delay Yes • OFF delay Yes • OFF delay Yes • DFF delay/instantaneous No • pulse delayed Yes • pulse delayed/instantaneous No • pulse-shaping/instantaneous No • pulse-shaping/instantaneous No • diditive ON-delay/instantaneous No • off-f-delay/instantaneous No • off-f-delay/instantaneous No • off-f-delay/instantaneous contact No • off-friggerable with deactivated control signal Yes • etrortriggerable with deactivated control signal Yes • etrortriggerable with switched-on control signal Yes • etrotriggerable with switched-on control signal Yes • etrortriggerable with switched-on control signal Yes • retrortriggerable with switched-on control signal Yes	-	
switching function with control signal Yes • additive ON-delay Yes • passing break contact Yes • passing break contact/instantaneous No • OFF delay Yes • OFF delay/instantaneous No • pulse delayed/instantaneous No • pulse delayed/instantaneous No • pulse delayed/instantaneous No • pulse delayed/instantaneous No • pulse-shaping Yes • pulse-shaping/instantaneous No • pulse-shaping/instantaneous No • pulse-shaping/instantaneous No • pulse-shaping/instantaneous No • passing make contact Yes • passing make contact No • retrotriggerable with deactivated control signal Yes • retrotriggerable with switched-on control signal Yes • retrotriggerable with deactivated control signal Yes </td <td>-</td> <td></td>	-	
• additive ON-delayYes• passing break contactYes• passing break contact/instantaneousNo• OFF delayYes• OFF delay/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse-shapingYes• pulse-shaping/instantaneousNo• pulse-shaping/instantaneousNo• pulse-shaping/instantaneousNo• pulse-shaping/instantaneousNo• additive ON-delay/instantaneousNo• passing make contactYes• passing make contactNo• passing make contactNo• passing make contactNo• passing make contactNo• retrotriggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated control signalYes• design of the cortrol terminal non-floatingYes• bort-circuit protectionfus gul/gG: 4 A		NO
• passing break contactYes• passing break contact/instantaneousNo• OFF delayYes• OFF delay/instantaneousNo• pulse delayedYes• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse-shapingYes• pulse-shaping/instantaneousNo• additive ON-delay/instantaneousNo• additive ON-delay/instantaneousNo• oN-delay/OFF-delay/instantaneousNo• oN-delay/OFF-delay/instantaneousNo• passing make contactYes• passing make contactNo• passing make contactNo• retrotriggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated control signal		Vee
passing break contact/instantaneousNo• OFF delayYes• OFF delay/instantaneousNo• pulse delayedYes• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse-shaping/instantaneousNo• pulse-shaping/instantaneousNo• delay/OFF-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousNo• passing make contactYes• passing make contactNo• passing make contact/instantaneous contactNo• retrotriggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated control signal <td>-</td> <td></td>	-	
OFF delayYes• OFF delay/instantaneousNo• pulse delayedYes• pulse delayed/instantaneousNo• pulse delayed/instantaneousNo• pulse-shapingYes• pulse-shaping(instantaneous)No• additive ON-delay/instantaneousNo• oN-delay/OFF-delay/instantaneousNo• oN-delay/OFF-delay/instantaneousNo• oN-delay/OFF-delay/instantaneousNo• oN-delay/OFF-delay/instantaneousNo• passing make contactYes• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• retrotriggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated cont		
• OFF delay/instantaneousNo• pulse delayedYes• pulse delayed/instantaneousNo• pulse-shapingYes• pulse-shaping/instantaneousNo• additive ON-delay/instantaneousNo• additive ON-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousNo• passing make contactYes• passing make contactNo• passing make contactNo• passing make contactNo• retrotriggerable with deactivated controlNo• retrotriggerable with deactivated controlNo• retrotriggerable with switched-on controlYes• retrotriggerable with deactivated control signalYes• retrotriggerable with for short-circuit protection of the auxiliaryYus gu'/gG: 4 A		
• pulse delayedYes• pulse delayed/instantaneousNo• pulse-shapingYes• pulse-shaping/instantaneousNo• additive ON-delay/instantaneousNo• oON-delay/OFF-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousNo• passing make contactYes• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• retrotriggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated control signalYes• retriggerable with for short-circuit protection of the auxiliaryYes• solor - circuit protectionYes• solor - circuit protectionYes• solor - circuit protection of the auxiliaryYes• solor - circuit protectionYes• solor - circuit protection of the auxiliaryYes	-	
pulse delayd/instantaneousNopulse-shapingYespulse-shaping/instantaneousNoadditive ON-delay/instantaneousNoON-delay/OFF-delay/instantaneousNoON-delay/OFF-delay/instantaneousNopassing make contactYespassing make contactNoswitching function of interval relay with control signalNo• retrotriggerable with deactivated controlNosignal/instantaneous contactYes• retrotriggerable with switched-on control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated controlYes• retrotriggerable with deactivated control signalYes• retriggerable with for short-circuit protection of the auxiliaryfuse gL/gG: 4 A		
Pulse-shapingYespulse-shaping/instantaneousNoadditive ON-delay/instantaneousNoON-delay/OFF-delay/instantaneousNoON-delay/OFF-delay/instantaneousNopassing make contactYespassing make contact/instantaneous contactNoswitching function of interval relay with control signalNoretrotriggerable with deactivated controlNosignal/instantaneous contactNoretrotriggerable with switched-on control signalYesretrotriggerable with switched-on controlNosignal/instantaneous contactYesretrotriggerable with deactivated control signalYesretrotriggerable with deactivated control signalYesretrotriggerable with switched-on controlNosignal/instantaneous contactYesretrotriggerable with deactivated control signalYesdesign of the control terminal non-floatingYesswitch requiredStort-circuit protection of the auxiliaryswitch requiredfuse gL/gG: 4 A		
Pulse-shaping/instantaneousNo• additive ON-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousYes• passing make contactNo• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• retrotriggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated control signalYes• retriggerable with for short-circuit protection of the auxiliaryfuse gL/gG: 4 A		
• additive ON-delay/instantaneousNo• ON-delay/OFF-delay/instantaneousNo• passing make contactYes• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• retrotriggerable with deactivated control signalNo• retrotriggerable with switched-on control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated controlNo• retrotriggerable with switched-on controlNo• retrotriggerable with deactivated controlYes• retrotriggerable with deactivated control signalYes• retriggerable with for short-circuit protection of the auxiliaryfuse gL/gG: 4 A		
• ON-delay/OFF-delay/instantaneousNo• passing make contactYes• passing make contact/instantaneous contactNo• passing make contact/instantaneous contactNo• retrotriggerable with deactivated control signalNo• retrotriggerable with deactivated control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated control signalYes• retriggerable with deactivated control signalYes• retrotriggerable with for short-circuit protection of the auxiliaryfuse gL/gG: 4 A		
• passing make contactYes• passing make contact/instantaneous contactNoswitching function of interval relay with control signal• retrotriggerable with deactivated controlNosignal/instantaneous contactYes• retrotriggerable with switched-on control signalYes• retrotriggerable with deactivated controlNosignal/instantaneous contactNo• retrotriggerable with switched-on controlNo• retrotriggerable with deactivated controlNosignal/instantaneous contactYes• retriggerable with deactivated control signalYes• retriggerable with for short-circuit protection of the auxiliaryfuse gL/gG: 4 A	-	
• passing make contact/instantaneous contactNoswitching function of interval relay with control signalNo• retrotriggerable with deactivated control signal/instantaneous contactNo• retrotriggerable with switched-on control signalYes• retrotriggerable with switched-on control signal/instantaneous contactNo• retrotriggerable with deactivated control signal/instantaneous contactNo• retrotriggerable with switched-on control 		
switching function of interval relay with control signal No • retrotriggerable with deactivated control No • retrotriggerable with switched-on control signal Yes • retrotriggerable with switched-on control No signal/instantaneous contact No • retrotriggerable with switched-on control No signal/instantaneous contact No • retriggerable with deactivated control signal Yes design of the control terminal non-floating Yes Short-circuit protection Yes design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		
• retrotriggerable with deactivated control signal No • retrotriggerable with switched-on control signal Yes • retrotriggerable with switched-on control signal No • retrotriggerable with switched-on control signal No • retrotriggerable with switched-on control signal Yes • retriggerable with deactivated control signal Yes • retriggerable with deactivated control signal Yes design of the control terminal non-floating Yes Short-circuit protection Yes design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		
signal/instantaneous contact Yes • retrotriggerable with switched-on control signal Yes • retrotriggerable with switched-on control No signal/instantaneous contact Yes • retriggerable with deactivated control signal Yes • retriggerable with deactivated control signal Yes design of the control terminal non-floating Yes Short-circuit protection Yes design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		No
retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal retriggerable with deactivated control signal retriggerable with deactivated control signal retriggerable with deactivated control signal retriggerable with deactivated control signal Yes Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		
signal/instantaneous contact Yes • retriggerable with deactivated control signal Yes design of the control terminal non-floating Yes Short-circuit protection Yes design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A	 retrotriggerable with switched-on control signal 	Yes
retriggerable with deactivated control signal Yes design of the control terminal non-floating Yes Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		No
design of the control terminal non-floating Yes Short-circuit protection Yes design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A	signal/instantaneous contact	
Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required fuse gL/gG: 4 A		Yes
design of the fuse link for short-circuit protection of the auxiliary fuse gL/gG: 4 A switch required		Yes
switch required		
		fuse gL/gG: 4 A
Auxiliary circuit		


number of NC contacts	
delayed switching	0
 instantaneous contact 	0
number of NO contacts	
 delayed switching 	1
instantaneous contact	0
number of CO contacts	
 delayed switching 	0
 instantaneous contact 	0
operational current of auxiliary contacts at AC-15	
• at 24 V	1 A
• at 250 V	1 A
operational current of auxiliary contacts at DC-12	
• at 24 V	1 A
• at 125 V	1 A
• at 250 V	1 A
operating frequency with 3RT2 contactor maximum	5 000 1/h
switching capacity current with inductive load	0.01 1 A
Inputs/ Outputs	
product function	
at the relay outputs switchover delayed/without delay	No
non-volatile	No
residual current maximum	0.5 mA
Electromagnetic compatibility	
EMC emitted interference according to IEC 61812-1	ambience A (industrial sector)
EMC immunity according to IEC 61812-1	corresponds to degree of severity 3
conducted interference	corresponds to degree or sevency 5
	2 kV network connection / 1 kV control connection
due to burst according to IEC 61000-4-4	2 kV
due to conductor-earth surge according to IEC 61000-4-5	
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV
field-based interference according to IEC 61000-4-3	10 V/m
field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2	10 V/m 4 kV contact discharge / 8 kV air discharge
electrostatic discharge according to IEC 61000-4-2 Safety related data	
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety	4 kV contact discharge / 8 kV air discharge
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1	4 kV contact discharge / 8 kV air discharge none
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529	4 kV contact discharge / 8 kV air discharge none
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and	4 kV contact discharge / 8 kV air discharge none IP20
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit	4 kV contact discharge / 8 kV air discharge none IP20 Yes
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit	4 kV contact discharge / 8 kV air discharge none IP20 Yes
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in)
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2.5 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing • for AWG cables solid	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2.5 mm ² 0.5 4 mm ² 20 12
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • finely stranded without core end processing • for AWG cables solid • for AWG cables stranded	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2.5 mm ² 0.5 4 mm ² 20 12
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2.5 mm ² 0.5 4 mm ² 20 12 20 12
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables stranded connectable conductor cross-section • solid • for AWG cables stranded connectable conductor cross-section • solid	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables stranded connectable conductor cross-section • solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded without core end processing • finely stranded without core end processing • finely stran	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded without core end processing • finely stranded without core end processing • finely stranded without core end processing	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2.5 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ² 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded with core end processing • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded with core end processing • finely stranded without core end processing • finely stranded without core end processing • solid • solid • solid • solid • solid • solid • stranded	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2.5 mm ² 0.5 4 mm ² 20 12 0.5 4 mm ² 20 12 0.5 4 mm ² 0.5 4 mm ² 0.5 4 mm ² 0.5 4 mm ² 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • solid • solid • solid • stranded Installation/ mounting/ dimensions	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ² 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded without core end processing<	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 4 mm ² 20 12 20 12 20 12 0.5 4 mm ² 0.5 4 mm ²
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded with core end processing • finely stranded without core end processing • finely stranded without core end processing • solid • solid • solid • solid • solid • stranded Installation/ mounting/ dimensions mounting position <	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ² 0.5 4 mm ² 12 12 12 12 12 12 12 12 12 12
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded without core end pr	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ² 0.5 4 mm ² 12 20 12 20 12
electrostatic discharge according to IEC 61000-4-2 Safety related data category according to EN 954-1 Electrical Safety protection class IP on the front according to IEC 60529 Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for auxiliary and control circuit type of connectable conductor cross-sections • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • for AWG cables stranded connectable conductor cross-section • solid • finely stranded with core end processing • finely stranded with core end processing • finely stranded with core end processing • finely stranded without core end processing • finely stranded without core end processing • solid • solid • solid • stranded Installation/ mounting/ dimensions mounting position fastening method <td>4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm² 0.5 2.5 mm² 0.5 4 mm² 20 12 20 12 0.5 4 mm² 0.5 4 mm²</td>	4 kV contact discharge / 8 kV air discharge none IP20 Yes spring-loaded terminals (push-in) 0.5 4 mm ² 0.5 2.5 mm ² 0.5 4 mm ² 20 12 20 12 0.5 4 mm ² 0.5 4 mm ²

required spacing with side-by-side 					
 with side-by-side 					
	e mounting				
— forwards		1 O	nm		
- backwards		1 O	nm		
— upwards		n O	nm		
- downwards	3	n O	nm		
— at the side		n O	nm		
 for grounded par 	ts				
— forwards		n O	nm		
— backwards		n O	nm		
— upwards		n O	nm		
— at the side		n O	nm		
- downwards	3	n O	nm		
 for live parts 					
— forwards		n 0	nm		
— backwards		n O	nm		
— upwards		n O	nm		
- downwards	3	n O	nm		
— at the side		n O	nm		
mbient conditions					
	eight above sea level max	kimum 2 (000 m		
ambient temperature	0				
 during operation 		-2	5 +60 °C		
 during storage 		-40	0 +85 °C		
during transport			0 +85 °C		
relative humidity during	operation		95 %		
pprovals Certificates	, op or all of				
General Product App	roval				EMV
	ŬΚ				<i>n</i> . <i>n</i>
	Сн	EG-Konf.		LHL	RCM
EMV	Test Certificates	EG-Konf. Marine / Shipping		EHL	RCM
EMV KC	Test Certificates			Llovds Register us	RCM
	Type Test Certific-	Marine / Shipping	UL UL Environment	LUS Hovers Register	RCM
<u>KC</u>	Type Test Certific-	Marine / Shipping	Environmental Con- firmations	LUNAL URS	RCM
KC Marine / Shipping Warine / Shipping Wither information Information on the pa https://support.industry Information- and Dow https://www.siemens.cc Industry Mall (Online	Ivpe Test Certific- ates/Test Report	Marine / Shipping	Environmental Con- firmations	Llovds Kegister uts	RCM

https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-2CW30 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2505-2CW30&lang=en

Characteristic: Derating https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-2CW30/manual

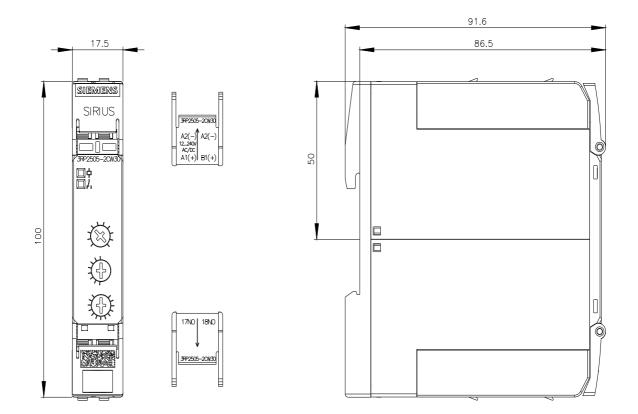

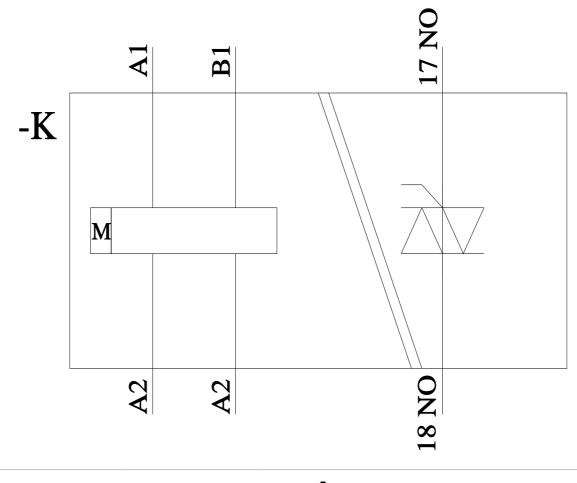

last modified:

4/1/2025 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RP25052CW30