## **SIEMENS**

Data sheet 3RQ3118-2AE01



Output coupler with plug-in Relay, 1 CO, hard gold-plated Spring-type terminal (push-in) 115 V AC/DC Enclosure width 6.2 mm Thermal current 6A

product brand name	SIRIUS
product category	SIRIUS 3RQ3 coupling relays in slim design
product designation	Coupling relays with plug-in relay
design of the product	Output coupling link
product type designation	3RQ3
General technical data	
display version LED	Yes
product feature protective coating on printed-circuit board	No
product component	
<ul> <li>relay output</li> </ul>	Yes
• semi-conductor output	No
consumed active power	0.5 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
surge voltage resistance rated value	4 kV
maximum permissible voltage for protective separation	
<ul> <li>between control and auxiliary circuit</li> </ul>	300 V
percental drop-out voltage related to the input voltage	9.6 %
protection class IP	IP20
flammability class of enclosure material	UL94 V-0
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
vibration resistance	
• according to IEC 60068-2-6	6 150 Hz: 2 g
operating frequency maximum	72 000 1/h
switching behavior	monostable
mechanical service life (operating cycles) typical	10 000 000
thermal current	6 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	03/25/2015
Control circuit/ Control	
control supply voltage at AC	
• at 50 Hz rated value	115 V
at 60 Hz rated value	115 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage at DC	
rated value	115 V
operating range factor control supply voltage rated value at DC	

0.8	
1.1	
0.8	
1.1	
0.8	
1.1	
8 ms	
6 ms	
17 ms	
poled	
Yes	
fuse gG: 4 A	
Changeover contact	
AgSnO2 hard gold-plated	
1	
3 A	
3 A	
1 A	
0.2 A	
0.1 A	
U. I A	
one incorrect switching operation of 100 million switching operations (5 V, 1	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)	
one incorrect switching operation of 100 million switching operations (5 V, 1	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector)	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A  0.2 A  0.1 A  ambience A (industrial sector) corresponds to degree of severity 3	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge  LED green  No spring-loaded terminals (push-in)	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge  LED green  No spring-loaded terminals (push-in)	
one incorrect switching operation of 100 million switching operations (5 V, 1 mA)  AC/DC  No 3 A  1 A 0.2 A 0.1 A  ambience A (industrial sector) corresponds to degree of severity 3  2 kV 2 kV 1 kV  10 V/m 6 kV contact discharge / 8 kV air discharge  LED green  No spring-loaded terminals (push-in)	

Control of the state of the sta	4(0.05 0.5	
finely stranded without core end processing	1x (0.25 2.5 mm²)	
• for AWG cables solid	1 x (20 14)	
• for AWG cables stranded	1x (20 14)	
connectable conductor cross-section	0.05 0.5 3	
• solid	0.25 2.5 mm <sup>2</sup>	
finely stranded with core end processing	0.25 1.5 mm <sup>2</sup>	
finely stranded without core end processing	0.25 2.5 mm <sup>2</sup>	
AWG number as coded connectable conductor cross section		
• solid	20 14	
stranded	20 14	
Installation/ mounting/ dimensions		
mounting position	any	
fastening method	snap-on mounting	
height	93 mm	
width	6.2 mm	
depth	76 mm	
required spacing		
with side-by-side mounting		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— downwards	0 mm	
— at the side	0 mm	
• for grounded parts		
— forwards	0 mm	
— backwards	0 mm	
— upwards	0 mm	
— at the side	0 mm	
— downwards	0 mm	
• for live parts	0 =====	
— forwards — backwards	0 mm	
	0 mm	
— upwards — downwards	0 mm 0 mm	
— downwards — at the side	0 mm	
Ambient conditions	O HIIII	
installation altitude at height above sea level maximum	2 000 m	
ambient temperature	2 000 111	
during operation	-25 +60 °C	
during operation     during storage	-40 +85 °C	
during storage     during transport	-40 +85 °C	
relative humidity during operation	10 95 %	
Certificates/ approvals	10 00 70	
General Product Approval		EMC
General Froduct Approval		LIVIC

Confirmation









**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping



Type Test Certificates/Test Report



Confirmation

Further information

Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

## Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

## Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ3118-2AE01

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ3118-2AE01


 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 


https://support.industry.siemens.com/cs/ww/en/ps/3RQ3118-2AE01

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RQ3118-2AE01&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RQ3118-2AE01&lang=en</a>

**Characteristic: Derating** 

https://support.industry.siemens.com/cs/ww/en/ps/3RQ3118-2AE01/manual

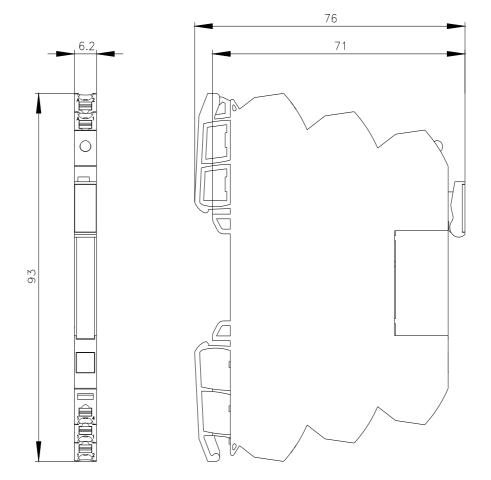

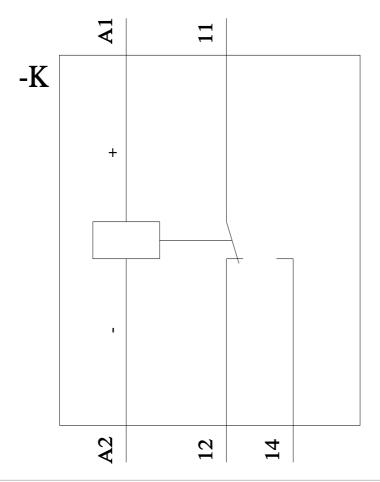

last modified: 6/30/2023 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RQ31182AE01