SIEMENS

Data sheet

3RT1065-2AP36



power contactor, AC-3e/AC-3 265 A, 132 kW / 400 V AC (50-60 Hz) / DC Uc: 220-240 V 3-pole, auxiliary contacts 2 NO + 2 NC drive: conventional main circuit: busbar control and auxiliary circuit: spring-loaded terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1
General technical data	
size of contactor	S10
product extension	
function module for communication	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
at AC in hot operating state	54 W
at AC in hot operating state per pole	18 W
without load current share typical	7.4 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
 of auxiliary circuit with degree of pollution 3 rated value 	500 V
surge voltage resistance	
of main circuit rated value	8 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
● at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30	95 %

maximum	
lain circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	5
at AC-3 rated value maximum	1 000 V
at AC-3 rated value maximum at AC-3e rated value maximum	1 000 V
	1000 V
 operational current at AC-1 at 400 V at ambient temperature 40 °C rated value 	330 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	330 A
— up to 690 V at ambient temperature 60 °C rated value	300 A
— up to 1000 V at ambient temperature 40 °C rated value	150 A
 — up to 1000 V at ambient temperature 60 °C rated value 	150 A
at AC-3 — at 400 V rated value	265 4
	265 A
— at 500 V rated value	265 A
— at 690 V rated value	265 A
— at 1000 V rated value	95 A
• at AC-3e	005 A
— at 400 V rated value	265 A
— at 500 V rated value	265 A
— at 690 V rated value	265 A
— at 1000 V rated value	95 A
• at AC-4 at 400 V rated value	230 A
• at AC-5a up to 690 V rated value	290 A
• at AC-5b up to 400 V rated value	219 A
• at AC-6a	205 A
— up to 230 V for current peak value n=20 rated value	265 A
— up to 400 V for current peak value n=20 rated value	265 A
— up to 500 V for current peak value n=20 rated value	265 A 265 A
— up to 690 V for current peak value n=20 rated value	
 — up to 1000 V for current peak value n=20 rated value at AC-6a 	95 A
— up to 230 V for current peak value n=30 rated value	184 A
— up to 400 V for current peak value n=30 rated value	184 A
 up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value 	184 A
 up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value 	184 A
— up to 1000 V for current peak value n=30 rated value	95 A
minimum cross-section in main circuit at maximum AC-1 rated	95 A 185 mm ²
value operational current for approx. 200000 operating cycles at	
AC-4	
• at 400 V rated value	117 A
• at 690 V rated value	105 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	300 A
— at 60 V rated value	300 A
— at 110 V rated value	33 A
— at 220 V rated value	3.8 A
— at 440 V rated value	0.9 A
— at 600 V rated value	0.6 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	300 A
— at 60 V rated value	300 A

— at 110 V rated value	300 A			
— at 220 V rated value	300 A			
— at 440 V rated value	4 A			
— at 600 V rated value	2 A			
with 3 current paths in series at DC-1				
— at 24 V rated value	300 A			
— at 60 V rated value	300 A			
— at 110 V rated value	300 A			
— at 220 V rated value	300 A			
— at 440 V rated value	11 A			
— at 600 V rated value	5.2 A			
• at 1 current path at DC-3 at DC-5	200.4			
— at 24 V rated value	300 A			
- at 60 V rated value	11 A			
- at 110 V rated value	3 A			
- at 220 V rated value	0.6 A 0.18 A			
— at 440 V rated value — at 600 V rated value	0.125 A			
with 2 current paths in series at DC-3 at DC-5	0.125 A			
- at 24 V rated value	300 A			
— at 60 V rated value	300 A			
— at 110 V rated value	300 A			
— at 220 V rated value	2.5 A			
— at 440 V rated value	0.65 A			
— at 600 V rated value	0.37 A			
• with 3 current paths in series at DC-3 at DC-5				
— at 24 V rated value	300 A			
— at 60 V rated value	300 A			
— at 110 V rated value	300 A			
— at 220 V rated value	300 A			
— at 440 V rated value	1.4 A			
— at 600 V rated value	0.75 A			
operating power				
• at AC-3				
— at 230 V rated value	75 kW			
— at 400 V rated value	132 kW			
— at 500 V rated value	160 kW			
— at 690 V rated value	250 kW			
— at 1000 V rated value	132 kW			
• at AC-3e				
— at 230 V rated value	75 kW			
— at 400 V rated value	132 kW			
— at 500 V rated value	160 kW			
— at 690 V rated value	250 kW			
— at 1000 V rated value	132 kW			
operating power for approx. 200000 operating cycles at AC- 4				
• at 400 V rated value	66 kW			
• at 690 V rated value	102 kW			
operating apparent power at AC-6a				
 up to 230 V for current peak value n=20 rated value 	100 000 kVA			
• up to 400 V for current peak value n=20 rated value	180 000 VA			
 up to 500 V for current peak value n=20 rated value 	220 000 VA			
 up to 690 V for current peak value n=20 rated value 	310 000 VA			
• up to 1000 V for current peak value n=20 rated value	160 000 VA			
operating apparent power at AC-6a				
 up to 230 V for current peak value n=30 rated value 	70 000 VA			
• up to 400 V for current peak value n=30 rated value	120 000 VA			
• up to 500 V for current peak value n=30 rated value	150 000 VA			
• up to 690 V for current peak value n=30 rated value	220 000 VA			
• up to 1000 V for current peak value n=30 rated value	160 000 VA			

short-time withstand current in cold operating state up to 40 °C				
 limited to 1 s switching at zero current maximum 	4 880 A; Use minimum cross-section acc. to AC-1 rated value			
 limited to 5 s switching at zero current maximum 				
 limited to 0 s switching at zero current maximum 	4 045 A; Use minimum cross-section acc. to AC-1 rated value			
 limited to 30 s switching at zero current maximum 	2 785 A; Use minimum cross-section acc. to AC-1 rated value			
Imited to 50 s switching at zero current maximum Imited to 60 s switching at zero current maximum	1 664 A; Use minimum cross-section acc. to AC-1 rated value 1 276 A; Use minimum cross-section acc. to AC-1 rated value			
no-load switching frequency	1270 A, Ose minimum closs-section acc. to AC-11ated value			
• at AC	2 000 1/h			
• at DC	2 000 1/h			
operating frequency	2 000 1/11			
• at AC-1 maximum	800 1/h			
• at AC-2 maximum	250 1/h			
• at AC-2 maximum	500 1/h			
• at AC-3 maximum	500 1/h			
• at AC-3e maximum	130 1/h			
Control circuit/ Control	130 1/11			
type of voltage of the control supply voltage	AC/DC			
control supply voltage at AC	220 240 1/			
at 50 Hz rated value	220 240 V			
at 60 Hz rated value	220 240 V			
control supply voltage at DC	220 240 1/			
rated value	220 240 V			
operating range factor control supply voltage rated value of magnet coil at DC				
initial value	0.8			
full-scale value	1.1			
operating range factor control supply voltage rated value of magnet coil at AC				
• at 50 Hz	0.8 1.1			
• at 60 Hz	0.8 1.1			
design of the surge suppressor	with varistor			
apparent pick-up power				
 at minimum rated control supply voltage at AC 				
— at 50 Hz	490 VA			
— at 60 Hz	490 VA			
 at maximum rated control supply voltage at AC 				
— at 60 Hz	590 VA			
— at 50 Hz	590 VA			
apparent pick-up power of magnet coil at AC				
• at 50 Hz	590 VA			
• at 60 Hz	590 VA			
inductive power factor with closing power of the coil				
• at 50 Hz	0.9			
• at 60 Hz	0.9			
apparent holding power				
 at minimum rated control supply voltage at DC 	6.1 VA			
 at maximum rated control supply voltage at DC 	7.4 VA			
apparent holding power				
 at minimum rated control supply voltage at AC 				
— at 50 Hz	5.6 VA			
— at 60 Hz	5.6 VA			
 at maximum rated control supply voltage at AC 				
— at 50 Hz	6.7 VA			
— at 60 Hz	6.7 VA			
apparent holding power of magnet coil at AC				
• at 50 Hz	6.7 VA			
• at 60 Hz	6.7 VA			
inductive power factor with the holding power of the coil				
• at 50 Hz	0.9			
• at 60 Hz	0.9			
closing power of magnet coil at DC	650 W			

holding power of magnet coil at DC	7.4 W			
closing delay				
• at AC	30 95 ms			
• at DC	30 95 ms			
opening delay				
• at AC	40 80 ms			
• at DC	40 80 ms			
arcing time	10 15 ms			
control version of the switch operating mechanism	Standard A1 - A2			
Auxiliary circuit				
number of NC contacts for auxiliary contacts instantaneous	2			
contact	2			
number of NO contacts for auxiliary contacts instantaneous contact	2			
operational current at AC-12 maximum	10 A			
operational current at AC-15				
• at 230 V rated value	6 A			
• at 400 V rated value	3 A			
at 500 V rated value	2 A			
at 690 V rated value	1A			
operational current at DC-12				
• at 24 V rated value	10 A			
at 24 V rated value at 48 V rated value	6 A			
• at 60 V rated value	6 A			
• at 110 V rated value	3 A			
• at 125 V rated value	2 A			
at 220 V rated value	1 A			
at 600 V rated value	0.15 A			
operational current at DC-13				
• at 24 V rated value	10 A			
• at 48 V rated value	2 A			
• at 60 V rated value	2 A			
• at 110 V rated value	1 A			
• at 125 V rated value	0.9 A			
• at 220 V rated value	0.3 A			
at 600 V rated value	0.1 A			
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)			
UL/CSA ratings				
full-load current (FLA) for 3-phase AC motor				
• at 480 V rated value	240 A			
	240 A 242 A			
• at 600 V rated value	242 M			
yielded mechanical performance [hp]				
• for 3-phase AC motor				
— at 200/208 V rated value	75 hp			
— at 220/230 V rated value	100 hp			
— at 460/480 V rated value	200 hp			
— at 575/600 V rated value	250 hp			
contact rating of auxiliary contacts according to UL	A600 / Q600			
Short-circuit protection				
design of the fuse link				
 for short-circuit protection of the main circuit 				
- with type of coordination 1 required	gG: 500 A (690 V, 100 kA)			
— with type of assignment 2 required	gG: 400 A (690 V, 100 kA), aM: 315 A (690 V, 50 kA), BS88: 400 A (415 V, 50			
for short-circuit protection of the auxiliary switch required	κ̈́A) gG: 10 A (500 V, 1 kA)			
Installation/ mounting/ dimensions				
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back			
fastening method	screw fixing			
side-by-side mounting	Yes			
height	210 mm			
width	145 mm			
	199.111111			

 for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil Spring width of connection bar thickness of connection bar for mumber of holes at connectable conductor cross-section for main contacts stranded solid or stranded with core end processing for auxiliary contacts for auxiliary contacts for auxiliary contacts a solid or stranded for auxiliary contacts a solid or stranded b solid or stranded a solid or stranded b solid or stranded c solid or stranded a solid or stranded b solid or stranded b solid or stranded c solid or stranded a solid or stranded b solid or stranded c solid or stranded c	tion bar baded terminals ype terminals ype terminals			
at the side0 mm• for grounded parts20 mm- forwards10 mm- at the side10 mm- at the side10 mm- downwards10 mm• for live parts20 mm- forwards20 mm- upwards10 mm- downwards10 mm- downwards10 mm- at the side10 mmonnections/ TerminalsConntype of electrical connectionfor auxiliary and control circuit• for auxiliary and control circuitspring• at contactor for auxiliary contactsSpring• of magnet coilSpringwidth of connection bar25 mmthickness of connection bar6 mmthickness of connection bar11 mmthickness of connection bar10 mmconnectable conductor cross-section for auxiliary contacts10 mm• stranded70connectable conductor cross-section for auxiliary contacts25 mm• finely stranded with core end processing0.25 .• for auxiliary contacts2x (0,- finely stranded with core end processing2x (0,- finely stranded with core end processing2x (0,- finely stranded without core end processing2x (0,- finely stranded without core end processing2x (0,- finely stranded without core end processing2x (2xAWG number as code	paded terminals ype terminals			
• for grounded parts for grounded parts forwards upwards 10 mm at the side 10 mm downwards for live parts for wards for upwards for main current server at contactor for auxiliary contacts spring at contactor cross-section for auxiliary contacts stranded for auxiliary contacts stranded stranded at connectable conductor cross-section for auxiliary contacts solid or stranded for auxiliary contacts for auxiliary contacts solid or stranded ax (0, - solid or stranded for auxiliary contacts solid or stranded ax (0, - solid or stranded for auxiliary contacts for auxiliary contacts ax (0, - finely stranded with core end processing for auxiliary contacts ax (0, - finely stranded with core end processing for auxiliary contacts ax (0, - finely stranded with core end processing ax (0, - finely stranded with core end processing ax (0, - finely stranded with core end processing ax (0, - finely stranded with core end processin	paded terminals ype terminals			
 forwards powards orm at the side orm downwards orm for live parts for wards orm for live parts forwards orm for wards orm downwards orm for auxiliary and control circuit spring of magnet coil spring or magnet coil spring or magnet coil spring or magnet coil spring or magnet coil spring ormaction bar for main current circuit connection bar for magnet coil spring ormagnet coil spring orm orm ormagnet coil spring ormagnet coil spring	paded terminals ype terminals			
	paded terminals ype terminals			
	paded terminals ype terminals			
	paded terminals ype terminals			
• for live parts — forwards 20 mm — upwards 10 mm — downwards 10 mm — at the side 10 mm — at the side 10 mm onnections/ Terminals ype of electrical connection • for auxiliary and control circuit for auxiliary and control circuit • for auxiliary and control circuit • of magnet coil width of connection bar thickness of nales 11 mm tumber of holes 11 connectable conductor cross-section for auxiliary contacts • stranded 0.255 • solid or stranded 0.255 • solid or stranded 0.255 • solid or stranded 2x (0, — finely stranded with core end processing • for auxiliary contacts - solid - finely stranded with core end processing - finely stranded without core end proc	paded terminals ype terminals			
	paded terminals ype terminals			
	paded terminals ype terminals			
downwards 10 mm at the side 10 mm at the side 10 mm onnections/Terminals 10 mm ype of electrical connection Connections for main current circuit Connection spring of magnet coil Spring width of connection bar 25 mm hickness of connection bar 6 mm hiameter of holes 11 mm biameter of holes 1 ornnectable conductor cross-section for main contacts - orn • stranded 70 connectable conductor cross-section for auxiliary contacts - solid or stranded • finely stranded with core end processing 0.25 . ype of connectable conductor cross-sections - solid solid 2x (0 solid 2x (0 solid or stranded 2x (0 finely stranded with core end processing 2x (0 finely stranded with core end processin	paded terminals ype terminals			
— at the side 10 mm ponnections/ Terminals ype of electrical connection • for main current circuit Connection is pring. • for auxiliary and control circuit spring. • at contactor for auxiliary contacts Spring. • of magnet coil Spring. width of connection bar 25 mm hickness of connection bar 6 mm fliameter of holes 11 mm number of holes 1 • stranded 70 connectable conductor cross-section for main contacts 0.25 . • solid or stranded 0.25 . • finely stranded with core end processing 0.25 . • for auxiliary contacts - solid - solid or stranded 2x (0. - finely stranded with core end processing 0.25 . • for auxiliary contacts - solid 2x (0. - finely stranded without core end processing 0.25 . • for auxiliary contacts - solid or stranded 2x (0. - finely stranded with core end processing 2x (0. - finely stranded without core end processing 2x (0. - finely stranded without core end processing	paded terminals ype terminals			
onnections/ Terminals ype of electrical connection Connection • for main current circuit spring • at contactor for auxiliary contacts Spring • of magnet coil Spring width of connection bar 25 mm hickness of connection bar 6 mm hiameter of holes 11 mm number of holes 1 connectable conductor cross-section for main contacts • stranded • stranded 0.25 . • of nealy stranded with core end processing 0.25 . • finely stranded without core end processing 0.25 . • for auxiliary contacts - solid - solid or stranded 2x (0. - solid or stranded 2x (0. - solid or stranded 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded without core end processing	paded terminals ype terminals			
ype of electrical connection Conn • for main current circuit spring • for auxiliary and control circuit spring • at contactor for auxiliary contacts Spring • of magnet coil Spring width of connection bar 25 mm thickness of connection bar 6 mm diameter of holes 11 mm brownectable conductor cross-section for main contacts • stranded • stranded 70 connectable conductor cross-section for auxiliary contacts • solid or stranded • solid or stranded 0.25 . • finely stranded with core end processing 0.25 . • for auxiliary contacts - solid - solid or stranded 2x (0. - solid or stranded 2x (0. - solid or stranded 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. <tr< td=""><td>paded terminals ype terminals</td></tr<>	paded terminals ype terminals			
 for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil spring spring of magnet coil spring of magnet coil spring spring of magnet coil spring spring spring if at contactor for auxiliary contacts stranded oconnectable conductor cross-section for main contacts stranded oconnectable conductor cross-section for auxiliary contacts solid or stranded 0.25 . finely stranded with core end processing o.25 . optical or stranded ax (0,	paded terminals ype terminals			
• for auxiliary and control circuitspring• at contactor for auxiliary contactsSpring• of magnet coilSpring• of magnet coilSpringwidth of connection bar25 mmthickness of connection bar6 mmdiameter of holes11 mmnumber of holes1connectable conductor cross-section for main contacts1• stranded70connectable conductor cross-section for auxiliary contacts0.25 .• solid or stranded0.25 .• finely stranded with core end processing0.25 .• for auxiliary contacts0.25 .• for auxiliary contacts2x (0 solid or stranded2x (0 solid or stranded with core end processing2x (0 finely stranded without core end processing2x (0 finely stranded without core end processing2x (0 finely stranded connectable conductor cross2x (0 finely	paded terminals ype terminals			
• at contactor for auxiliary contactsSpring• of magnet coilSpringwidth of connection bar25 mmthickness of connection bar6 mmdiameter of holes11 mmnumber of holes1connectable conductor cross-section for main contacts1• stranded70connectable conductor cross-section for auxiliary contacts0.25 .• solid or stranded0.25 .• finely stranded with core end processing0.25 .• for auxiliary contacts2x (0 solid or stranded2x (0 solid or stranded2x (0 finely stranded with core end processing2x (0 finely stranded without core end processing2x (0 finely stranded connectable conductor cross2x (0 finely stranded connectable conductor cross2x (0 finely stranded without core end processing2x (0 finely stranded connectable conductor cross2x (0 finely stranded connectable conductor cross2x (0 finely stranded without core end processing<	ype terminals			
• of magnet coilSpringwidth of connection bar25 mmchickness of connection bar6 mmdiameter of holes11 mmnumber of holes1connectable conductor cross-section for main contacts70• stranded70connectable conductor cross-section for auxiliary contacts0.25 .• solid or stranded0.25 .• finely stranded with core end processing0.25 .• for auxiliary contacts2x (0 solid2x (0 solid or stranded2x (0 finely stranded with core end processing2x (0 solid or stranded2x (0 finely stranded with core end processing2x (0 finely stranded without core end processing2x (0 finely stranded connectable conductor cross2x (0 for auxiliary contacts2x (2.AWG number as coded connectable conductor cross24of et y related data24				
width of connection bar 25 mm thickness of connection bar 6 mm diameter of holes 11 mm number of holes 1 connectable conductor cross-section for main contacts 1 e stranded 70 connectable conductor cross-section for auxiliary contacts 0.25 . e solid or stranded 0.25 . e finely stranded with core end processing 0.25 . e for auxiliary contacts 0.25 . e for auxiliary contacts 2x (0. — solid 2x (0. — finely stranded with core end processing 2x (0. — solid or stranded 2x (0. — finely stranded with core end processing 2x (0. — finely stranded with core end processing 2x (0. — finely stranded with core end processing 2x (0. — finely stranded with core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded connectable conductor cross 2x (24 MWG number as coded connectable conductor cross <td< td=""><td>ype terminals</td></td<>	ype terminals			
thickness of connection bar 6 mm diameter of holes 11 mm number of holes 1 connectable conductor cross-section for main contacts 1 e stranded 70 connectable conductor cross-section for auxiliary contacts 0.25 . e solid or stranded 0.25 . e finely stranded with core end processing 0.25 . e for auxiliary contacts 2x (0. — solid 2x (0. — finely stranded with core end processing 2x (0. — finely stranded with core end processing 2x (0. — finely stranded with core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded connectable conductor cross section 2x (24 AWG number as coded connectable conductor cross section				
diameter of holes 11 mm number of holes 1 connectable conductor cross-section for main contacts 70 • stranded 70 connectable conductor cross-section for auxiliary contacts 0.25 . • solid or stranded 0.25 . • finely stranded with core end processing 0.25 . • finely stranded without core end processing 0.25 . • for auxiliary contacts 2x (0. - solid 2x (0. - finely stranded with core end processing 2x (0. - solid or stranded 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded without core end processing 2x (0. - for AWG cables for auxiliary contacts 2x (24 AWG number as coded connectable conductor cross 24 afety related data 24				
number of holes 1 connectable conductor cross-section for main contacts 70 • stranded 70 connectable conductor cross-section for auxiliary contacts 0.25 . • solid or stranded 0.25 . • finely stranded with core end processing 0.25 . • finely stranded with core end processing 0.25 . • for auxiliary contacts 2x (0. - solid 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. • for AWG cables for auxiliary contacts 2x (24 AWG number as coded connectable conductor cross section 24 • for auxiliary contacts 24 afety related data 24				
connectable conductor cross-section for main contacts 70 stranded 70 connectable conductor cross-section for auxiliary contacts 0.25 . solid or stranded 0.25 . e finely stranded with core end processing 0.25 . e finely stranded without core end processing 0.25 . type of connectable conductor cross-sections 0.25 . e for auxiliary contacts 2x (0. — solid 2x (0. — finely stranded with core end processing 2x (0. — solid or stranded 2x (0. — finely stranded with core end processing 2x (0. — finely stranded with core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded without core end processing 2x (0. — finely stranded without core end processing 2x (0. — for AWG cables for auxiliary contacts 2x (24 AWG number as coded connectable conductor cross 24 afety related data 24				
• stranded70connectable conductor cross-section for auxiliary contacts• solid or stranded0.25 .• finely stranded with core end processing0.25 .• finely stranded without core end processing0.25 .• for auxiliary contacts solid2x (0 solid or stranded with core end processing2x (0 solid or stranded2x (0 finely stranded with core end processing2x (0 finely stranded with core end processing2x (0 finely stranded with core end processing2x (0 finely stranded without core end processing2x (0 finely stranded without core end processing2x (0 for AWG cables for auxiliary contacts2x (2.AWG number as coded connectable conductor cross24afety related data				
connectable conductor cross-section for auxiliary contacts 0.25 • solid or stranded 0.25 • finely stranded with core end processing 0.25 • finely stranded without core end processing 0.25 • for auxiliary contacts 2x (0. - solid 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded without core end processing 2x (0. • for AWG cables for auxiliary contacts 2x (24 AWG number as coded connectable conductor cross section 24 • for auxiliary contacts 24	0 mm²			
 solid or stranded finely stranded with core end processing finely stranded without core end processing finely stranded without core end processing for auxiliary contacts solid solid or stranded finely stranded with core end processing solid or stranded finely stranded with core end processing for auxiliary contacts finely stranded with core end processing for AWG cables for auxiliary contacts for auxiliary contacts for auxiliary contacts for auxiliary contacts 2x (0. for auxiliary contacts 2x (24 				
finely stranded without core end processing 0.25 type of connectable conductor cross-sections for auxiliary contacts — solid — solid 2x (0, — solid or stranded 2x (0, — finely stranded with core end processing — finely stranded without core end processing — finely stranded without core end processing — for AWG cables for auxiliary contacts 4 for auxiliary contacts — for auxiliary contacts — for auxiliary contacts 2x (24 AWG number as coded connectable conductor cross section — for auxiliary contacts 24 afety related data	2.5 mm ²			
type of connectable conductor cross-sections • for auxiliary contacts - solid 2x (0. - solid or stranded 2x (0. - finely stranded with core end processing 2x (0. - finely stranded with core end processing 2x (0. - finely stranded without core end processing 2x (0. • for AWG cables for auxiliary contacts 2x (24 AWG number as coded connectable conductor cross 24 • for auxiliary contacts 24 afety related data 24	1.5 mm ²			
for auxiliary contacts	2.5 mm ²			
 finely stranded with core end processing finely stranded without core end processing for AWG cables for auxiliary contacts for AWG number as coded connectable conductor cross for auxiliary contacts for auxiliary contacts 24 	2.5 mm²)			
 finely stranded without core end processing for AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section for auxiliary contacts afety related data 	2,5 mm²)			
for AWG cables for auxiliary contacts 2x (24 AWG number as coded connectable conductor cross section for auxiliary contacts 24 afety related data	1.5 mm²)			
AWG number as coded connectable conductor cross section • for auxiliary contacts 24 afety related data	2.5 mm²)			
• for auxiliary contacts afety related data	. 14)			
afety related data				
product function				
mirror contact according to IEC 60947-4-1 Yes	Yes			
positively driven operation according to IEC 60947-5-1 No	No			
suitability for use safety-related switching OFF Yes	Yes			
	1 000 000			
T1 value for proof test interval or service life according to IEC 20 a 61508	20 a			
v				
couch protection on the front according to IEC 60529 finger ertificates/ approvals	20 with box terminal/cover			







<u>KC</u>

EHC

EMC	Functional Safety/Safety of Ma- chinery	Declaration of Conformity		Test Certificates	
RCM	<u>Type Examination Cer-</u> <u>tificate</u>	UK CA	CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report
Marine / Shipping					other
ABS	Lloyd's Register LRS	PRS	RMRS	DNV-GL EMVELCORD	<u>Confirmation</u>
other			Railway		Environment
<u>Miscellaneous</u>	<u>Miscellaneous</u>	<u>Confirmation</u>	<u>Special Test Certific-</u> <u>ate</u>	Vibration and Shock	Environmental Con- firmations

Further informatior

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1065-2AP36

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1065-2AP36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1065-2AP36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1065-2AP36&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1065-2AP36/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1065-2AP36&objecttype=14&gridview=view1



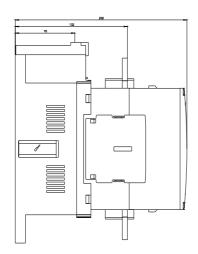

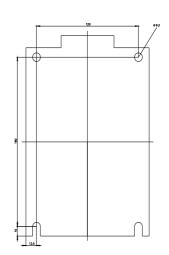

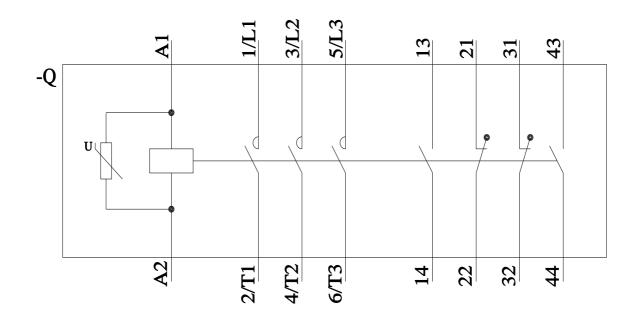

8/15/2023 🖸

8/17/2023

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT10652AP36