SIEMENS

Data sheet

3RT2326-1AB00



contactor AC-1, 40 A, 400 V / 40 $^\circ C$, 4-pole, 24 V AC, 50 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S0

| product brand name | SIRIUS |
|---|----------------------------|
| product designation | Contactor |
| product type designation | 3RT23 |
| General technical data | |
| size of contactor | SO |
| product extension | |
| function module for communication | No |
| auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| at AC in hot operating state | 9.6 W |
| at AC in hot operating state per pole | 2.4 W |
| insulation voltage | |
| of main circuit with degree of pollution 3 rated value | 690 V |
| of the auxiliary and control circuit with degree of pollution 3 rated value | 690 V |
| surge voltage resistance | |
| of main circuit rated value | 6 kV |
| of auxiliary circuit rated value | 6 kV |
| shock resistance at rectangular impulse | |
| • at AC | 8,3g / 5 ms, 5,3g / 10 ms |
| shock resistance with sine pulse | |
| ● at AC | 13,5g / 5 ms, 8,3g / 10 ms |
| mechanical service life (operating cycles) | |
| of contactor typical | 10 000 000 |
| of the contactor with added auxiliary switch block typical | 10 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 10/01/2009 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| during operation | -25 +60 °C |
| during storage | -55 +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Main circuit | |
| number of poles for main current circuit | 4 |
| number of NO contacts for main contacts | 4 |
| operational current | |
| at AC-1 at 400 V at ambient temperature 40 °C rated value | 40 A |

| • at AC-1 | |
|---|--|
| at AC-1 up to 690 V at ambient temperature 40 °C rated | 40 A |
| value | |
| — up to 690 V at ambient temperature 60 °C rated | 35 A |
| value | |
| • at AC-3 | |
| — at 400 V rated value | 15.5 A |
| at AC-4 at 400 V rated value | 15.5 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 10 mm ² |
| operating power | |
| • at AC-3 at 400 V rated value | 7.5 kW |
| • at AC-4 at 400 V rated value | 7.5 kW |
| short-time withstand current in cold operating state up to | |
| 40 °C | Use minimum cross-section acc. to AC-1 rated value |
| limited to 1 s switching at zero current maximum | Use minimum cross-section acc. to AC-1 rated value |
| limited to 5 s switching at zero current maximum | |
| Imited to 10 s switching at zero current maximum | Use minimum cross-section acc. to AC-1 rated value |
| Imited to 30 s switching at zero current maximum | Use minimum cross-section acc. to AC-1 rated value |
| Imited to 60 s switching at zero current maximum | Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | 5 000 4/h |
| • at AC | 5 000 1/h |
| operating frequency at AC-1 maximum | 1 000 1/h |
| Control circuit/ Control | |
| type of voltage | AC |
| type of voltage of the control supply voltage | AC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 24 V |
| operating range factor control supply voltage rated value of | |
| magnet coil at AC | |
| • at 50 Hz | 0.8 1.1 |
| apparent pick-up power of magnet coil at AC | |
| • at 50 Hz | 77 VA |
| inductive power factor with closing power of the coil | |
| • at 50 Hz | 0.82 |
| apparent holding power of magnet coil at AC | |
| • at 50 Hz | 9.8 VA |
| inductive power factor with the holding power of the coil | |
| • at 50 Hz | 0.25 |
| closing delay | |
| • at AC | 8 40 ms |
| opening delay | |
| • at AC | 4 16 ms |
| arcing time | 10 10 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts | 1 |
| attachable | 2 |
| instantaneous contact | 1 |
| number of NO contacts for auxiliary contacts | 1 |
| attachable | 2 |
| instantaneous contact | 1 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| • at 230 V rated value | 10 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| operational current at DC-12 | |
| at 24 V rated value | 10 A |
| at 48 V rated value | 6 A |
| at 60 V rated value | 6 A |
| | |

| at 110 V rated value | 3 A | | |
|---|--|--|--|
| at 125 V rated value | 2 A | | |
| at 220 V rated value | 1 A | | |
| • at 600 V rated value | 0.15 A | | |
| operational current at DC-13 | | | |
| at 24 V rated value | 10 A | | |
| • at 48 V rated value | 2 A | | |
| at 110 V rated value | 1A | | |
| • at 125 V rated value | 0.9 A | | |
| at 220 V rated value | 0.3 A | | |
| • at 600 V rated value | 0.1 A | | |
| design of the miniature circuit breaker for short-circuit protection | gG: 10 A (230 V, 400 A) | | |
| of the auxiliary switch required | go. 10 A (200 V, 400 A) | | |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) | | |
| UL/CSA ratings | | | |
| contact rating of auxiliary contacts according to UL | A600 / Q600 | | |
| Short-circuit protection | | | |
| product function short circuit protection | No | | |
| design of the fuse link | | | |
| - | | | |
| for short-circuit protection of the main circuit — with type of coordination 1 required | nG: 63 A (690 V, 100 kA) | | |
| | gG: 63 A (690 V, 100 kA) | | |
| — with type of assignment 2 required for short circuit protection of the auxiliant switch required | gG: 20 A (690 V, 100 kA) | | |
| for short-circuit protection of the auxiliary switch required | gG: 10 A (690 V, 1 kA) | | |
| Installation/ mounting/ dimensions | | | |
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface | | |
| factoring mothod | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 | | |
| fastening method | | | |
| side-by-side mounting | Yes | | |
| height | 85 mm | | |
| width | 60 mm | | |
| depth | 97 mm | | |
| required spacing | | | |
| with side-by-side mounting | | | |
| — forwards | 10 mm | | |
| — upwards | 10 mm | | |
| — downwards | 10 mm | | |
| | | | |
| — at the side | 0 mm | | |
| | 0 mm | | |
| — at the side | 0 mm 10 mm | | |
| — at the side for grounded parts | | | |
| — at the side for grounded parts — forwards | 10 mm | | |
| at the side for grounded parts forwards upwards | 10 mm 10 mm | | |
| at the side for grounded parts forwards upwards at the side | 10 mm 10 mm 6 mm | | |
| at the side for grounded parts forwards upwards at the side downwards | 10 mm 10 mm 6 mm | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts | 10 mm 10 mm 6 mm 10 mm | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for wards | 10 mm 10 mm 6 mm 10 mm | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts forwards upwards | 10 mm 10 mm 6 mm 10 mm 10 mm | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts forwards upwards upwards downwards | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts forwards upwards upwards at the side downwards at the side | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts forwards upwards upwards at the side at the side | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 6 mm | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts forwards upwards upwards at the side Connections/ Terminals type of electrical connection for main current circuit | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm Screw-type terminals | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for vards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm Screw-type terminals screw-type terminals | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm screw-type terminals screw-type terminals screw-type terminals | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm Screw-type terminals screw-type terminals | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals $2x (1 2.5 mm^2), 2x (2.5 10 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 10 mm^2)$ | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for vards upwards downwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 6 mm Screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals Screw-type terminals $2x (1 2.5 mm^2), 2x (2.5 10 mm^2)$ $2x (1 2.5 mm^2), 2x (2.5 10 mm^2)$ | | |
| at the side for grounded parts forwards upwards at the side downwards for live parts for live parts forwards upwards downwards at the side Connections/ Terminals type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing | 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 10 mm 10 mm 6 mm screw-type terminals Screw- | | |

| finely stranded wi | th core end processing | | 1 10 mm² | | |
|--|------------------------------|-------------------------------|--|---|---------------------|
| - | | liary contacts | | | |
| connectable conductor cross-section for auxiliary contacts solid or stranded | | 0.5 2.5 mm² | | | |
| finely stranded with core end processing | | 0.5 2.5 mm ² | | | |
| type of connectable conductor cross-sections | | | | | |
| for auxiliary conta | acts | | | | |
| — solid | | | 2x (0.5 1.5 mm²), 2x (0.75 . | 2.5 mm²) | |
| — solid or stra | nded | | 2x (0.5 1.5 mm²), 2x (0.75 . | 2.5 mm²) | |
| - finely strand | led with core end process | sing | 2x (0.5 1.5 mm²), 2x (0.75 . | 2.5 mm²) | |
| for AWG cables for auxiliary contacts | | 2x (20 16), 2x (18 14) | | | |
| AWG number as code section | d connectable conducto | or cross | | | |
| for main contacts | | | 16 8 | | |
| for auxiliary contacts | | | 20 14 | | |
| afety related data | | | | | |
| product function | | | | | |
| mirror contact acc | cording to IEC 60947-4-1 | | Yes | | |
| 61508 | nterval or service life acco | - | 20 a | | |
| - | the front according to I | | IP20 | | |
| - | e front according to IEC | 60529 | finger-safe, for vertical contac | t from the front | |
| ommunication/ Protoc | | _ | | | |
| product function bus of | communication | | No | | |
| ertificates/ approvals | | | | | |
| General Product Appr | oval | | | | EMC |
| CSA | ccc | | UL | LIIL | RCM |
| Functional Safety/Safety of Ma- chinery | Declaration of Confor | mity | Test Certificates | | Marine / Shipping |
| <u>Type Examination Cer-</u> tificate | UK CA | CE EG-Konf. | <u>Type Test Certific-</u> ates/Test Report | <u>Special Test Certific-</u> <u>ate</u> | ABS |
| Marine / Shipping | | | | | other |
| BUREAU VERITAS | | Lloyds Register urs | RINA | RMRS RMRS | <u>Confirmation</u> |
| other | Railway | Environment | | | |
| | Vibration and Shock | Environmental C firmations | ion- | | |
| urther information | | | | | |
| Siemens has decided | to exit the Russian mar | | | | |
| https://proce.gicmons | om/global/en/pressrelease | loiomone wind d | | | |

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2326-1AB00

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2326-1AB00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2326-1AB00


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2326-1AB00&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2326-1AB00/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2326-1AB00&objecttype=14&gridview=view1







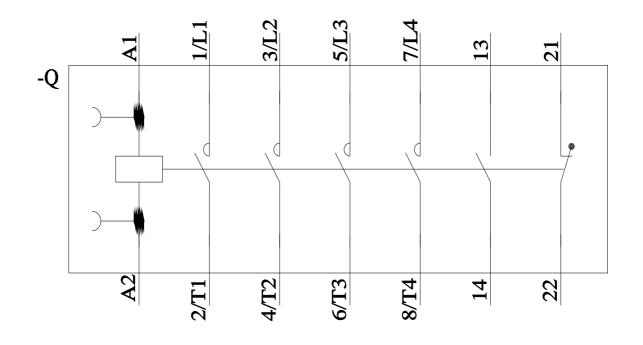

last modified:

11/21/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RT23261AB00