SIEMENS

Data sheet

3RU2116-1EB1




Overload relay 2.8...4.0 A Thermal For motor protection Size S00, Class 10 Standalone installation Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset


product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	5.7 W
• per pole	1.9 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-40 +70 °C
during storage	-55 +80 °C
 during transport 	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	2.8 4 A
operating voltage	
rated value	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	4 A
operational current at AC-3e at 400 V rated value	4 A


• at AC-3			
— at 400 V rated value	1.5 kW		
— at 500 V rated value	2.2 kW		
— at 690 V rated value	3 kW		
• at AC-3e			
— at 400 V rated value	1.5 kW		
— at 500 V rated value	2.2 kW		
— at 690 V rated value	3 kW		
Auxiliary circuit			
design of the auxiliary switch	integrated		
number of NC contacts for auxiliary contacts	1		
-			
• note	for contactor disconnection		
number of NO contacts for auxiliary contacts	1		
• note	for message "Tripped"		
number of CO contacts for auxiliary contacts	0		
operational current of auxiliary contacts at AC-15			
• at 24 V	3 A		
• at 110 V	3 A		
• at 120 V	3 A		
• at 125 V	3 A		
• at 230 V	2 A		
• at 400 V	1 A		
• at 690 V	0.75 A		
operational current of auxiliary contacts at DC-13			
• at 24 V	2 A		
• at 60 V	0.3 A		
	0.22 A		
• at 110 V			
• at 125 V	0.22 A		
• at 220 V	0.11 A		
contact rating of auxiliary contacts according to UL	B600 / R300		
Protective and monitoring functions			
trip class	CLASS 10		
design of the overload release	thermal		
UL/CSA ratings			
full-load current (FLA) for 3-phase AC motor			
 at 480 V rated value 	4 A		
 at 480 V rated value at 600 V rated value 	4 A 4 A		
at 600 V rated value Short-circuit protection			
at 600 V rated value Short-circuit protection design of the fuse link	4 A		
at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required			
at 600 V rated value Short-circuit protection design of the fuse link o for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	4 A fuse gG: 6 A, quick: 10 A		
• at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	4 A fuse gG: 6 A, quick: 10 A any		
at 600 V rated value Short-circuit protection design of the fuse link o for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation		
at 600 V rated value Short-circuit protection design of the fuse link o for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm		
at 600 V rated value Short-circuit protection design of the fuse link o for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm		
tat 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm		
at 600 V rated value Short-circuit protection design of the fuse link o for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm		
tat 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm		
• at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm		
• at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm		
the set of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No		
• at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No		
• at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No		
• at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No		
• at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No screw-type terminals screw-type terminals Top and bottom		
 at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No Screw-type terminals screw-type terminals Top and bottom 2x (0,5 1,5 mm ²), 2x (0,75 2,5 mm ²), 2x 4 mm ²		
 at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No Screw-type terminals screw-type terminals Top and bottom 2x (0,5 1,5 mm ²), 2x (0,75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)		
 at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid or stranded finely stranded with core end processing for AWG cables for main contacts 	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No Screw-type terminals screw-type terminals Top and bottom 2x (0,5 1,5 mm ²), 2x (0,75 2,5 mm ²), 2x 4 mm ²		
 at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts	4 A fuse gG: 6 A, quick: 10 A any stand-alone installation 89 mm 45 mm 80 mm No No Screw-type terminals screw-type terminals Top and bottom 2x (0,5 1,5 mm ²), 2x (0,75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)		


for AWG cables in tightening torque for main contacts for auxiliary control design of screwdriver size of the screwdriver design of the thread of the auxiliary auxiliary auxiliary auxiliary auxiliary auxiliary rate [FIT] with low Safety related data failure rate [FIT] with low MTTF with high dema T1 value for proof test in 61508 protection class IP on 	ded with core end process for auxiliary contacts s with screw-type terminals acts with screw-type termi s shaft of the connection screw of the connection screw of the contacts w demand rate according nd rate nterval or service life accord the front according to I	to SN 31920 rding to IEC EC 60529	2x (0.5 1.5 mm²), 2x (0.75 2x (0.5 1.5 mm²), 2x (0.75 2x (20 16), 2x (18 14) 0.8 1.2 N·m 0.8 1.2 N·m Diameter 5 6 mm Pozidriv PZ 2 M3 M3 S0 FIT 2 280 a 20 a IP20	2.5 mm²)		
	ne front according to IEC		finger-safe, for vertical contac			
Display	ching status		Slide switch			
display version for swite Certificates/ approvals						
	roval			For use in hazardous	locations	
General Product App	Ioval			For use in nazardous	locations	
<u>Confirmation</u>		(ال س	EHC	K ATEX	IECEx	
Declaration of Confor	mity	Test Certificate	es	Marine / Shipping		
CE EG-Konf.	UK CA	<u>Special Test Ce</u> <u>ate</u>	ertific- <u>Type Test Certific-</u> ates/Test Report	ABS	BUREAU VERITAS	
Marine / Shipping					other	
	Lloyd's Kegister uis	PRS	RINA	RMRS	<u>Confirmation</u>	
other	Railway					
	Vibration and Shock					
Further information Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1EB1						
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1EB1						


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EB1 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2116-1EB1&lang=en Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EB1/char Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1EB1&objecttype=14&gridview=view1

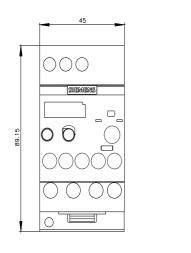

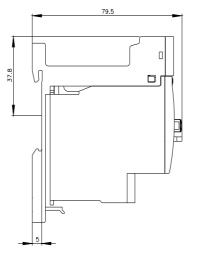

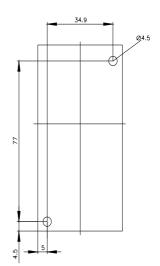

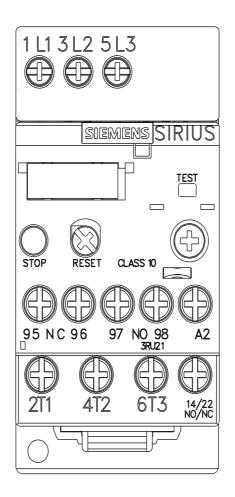

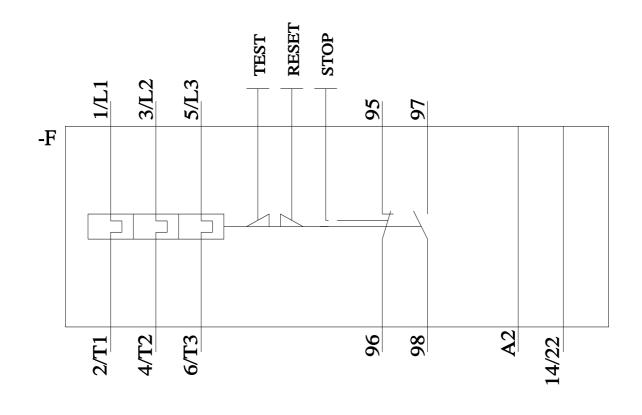

last modified:

3/8/2022 🖸

8/17/2023

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RU21161EB1