SIEMENS

Data sheet

3RU2126-1GB0



Overload relay 4.5...6.3 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

and double have a series	
product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	6.6 W
• per pole	2.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-40 +70 °C
 during storage 	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	4.5 6.3 A
operating voltage	
rated value	690 V
 at AC-3e rated value maximum 	690 V
operating frequency rated value	50 60 Hz
operational current rated value	
	6.3 A
operational current at AC-3e at 400 V rated value	6.3 A 6.3 A

• at AC-3	2.2 1/1/		
— at 400 V rated value	2.2 kW		
— at 500 V rated value	3 kW		
— at 690 V rated value	4 kW		
• at AC-3e	0.0111/		
— at 400 V rated value	2.2 kW		
— at 500 V rated value	3 kW		
— at 690 V rated value	4 kW		
Auxiliary circuit			
design of the auxiliary switch	integrated		
number of NC contacts for auxiliary contacts	1		
• note	for contactor disconnection		
number of NO contacts for auxiliary contacts	1		
• note	for message "Tripped"		
number of CO contacts for auxiliary contacts	0		
operational current of auxiliary contacts at AC-15			
• at 24 V	3 A		
• at 110 V	3 A		
• at 120 V	3 A		
• at 125 V	3 A		
• at 230 V	2 A		
• at 400 V	1 A		
• at 690 V	0.75 A		
operational current of auxiliary contacts at DC-13			
• at 24 V	2 A		
• at 60 V	0.3 A		
● at 110 V	0.22 A		
• at 125 V	0.22 A		
• at 220 V	0.11 A		
contact rating of auxiliary contacts according to UL	B600 / R300		
Protective and monitoring functions			
trip class	CLASS 10		
design of the overload release	thermal		
UL/CSA ratings			
full-load current (FLA) for 3-phase AC motor			
• at 480 V rated value	6.3 A		
• at 600 V rated value	6.3 A		
Short-circuit protection			
design of the fuse link			
design of the fuse linkfor short-circuit protection of the auxiliary switch required	fuse gG: 6 A, quick: 10 A		
-	fuse gG: 6 A, quick: 10 A		
for short-circuit protection of the auxiliary switch required	fuse gG: 6 A, quick: 10 A any		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	any		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	any Contactor mounting		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	any Contactor mounting 85 mm		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	any Contactor mounting 85 mm 45 mm		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	any Contactor mounting 85 mm 45 mm		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	any Contactor mounting 85 mm 45 mm 85 mm		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	any Contactor mounting 85 mm 45 mm 85 mm		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	any Contactor mounting 85 mm 45 mm 85 mm		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit	any Contactor mounting 85 mm 45 mm 85 mm No No		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current	any Contactor mounting 85 mm 45 mm 85 mm No No		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit	any Contactor mounting 85 mm 45 mm 85 mm No No		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	any Contactor mounting 85 mm 45 mm 85 mm No No		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm ²), 2x (2.5 10 mm ²)		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts	any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
 for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid or stranded finely stranded with core end processing for AWG cables for main contacts 	any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm ²), 2x (2.5 10 mm ²)		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts _ solid or stranded _ finely stranded with core end processing	any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom 2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		

	 — solid or stranded — finely stranded with core end processing 		2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)			
 for AWG cables for auxiliary contacts 		2x (20 16), 2x (18 14)				
tightening torque						
 for main contacts with screw-type terminals 		2 2.5 N·m				
 for auxiliary contacts with screw-type terminals 		0.8 1.2 N·m				
design of screwdriver shaft		Diameter 5 6 mm				
size of the screwdriver tip		Pozidriv PZ 2				
design of the thread of the connection screw						
for main contacts			M4			
			M3			
of the auxiliary and control contacts			IVIJ			
Safety related data						
	failure rate [FIT] with low demand rate according to SN 31920			50 FIT		
MTTF with high dema			2 280 a			
T1 value for proof test 61508	interval or service life acco	rding to IEC	20 a			
-	n the front according to II		IP20			
	he front according to IEC	60529	finger-safe, for vertical contact	ct from the front		
Display			.			
display version for swit	cning status		Slide switch			
Certificates/ approvals						
General Product App	oroval			For use in hazardous	locations	
	<u>Confirmation</u>	Ű	EHC	IECEx	K ATEX	
Declaration of Confo	rmity	Test Certificate	es	Marine / Shipping		
UK CA	CE EG-Konf.	<u>Special Test Ce</u> <u>ate</u>	ertific- <u>Type Test Certific-</u> ates/Test Report	ABS		
Marine / Shipping					other	
	Lloyd's Register urs	PRS	RINA	RMRS	<u>Confirmation</u>	
other	Railway					
	Vibration and Shock					
	to exit the Russian mark		own-russian-business			
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875						
Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10						
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-1GB0						
Cax online generator http://support.automati	Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-1GB0					

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1GB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-1GB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1GB0/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-1GB0&objecttype=14&gridview=view1

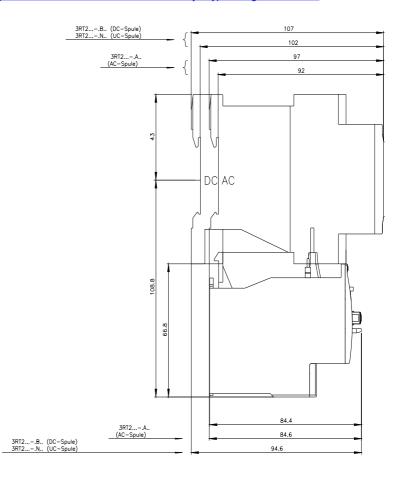



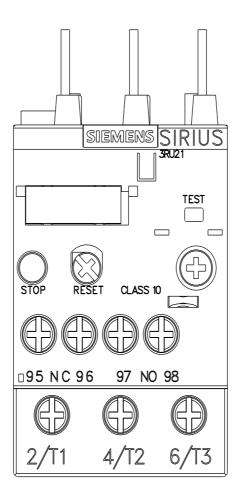

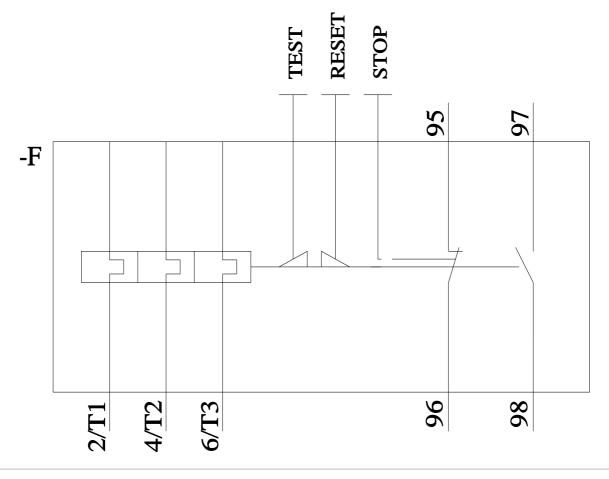

last modified:

3/8/2022 🖸

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RU21261GB0