SIEMENS

Data sheet 3RU2126-4PC0



Overload relay 30...36 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Spring-type terminal Auxiliary circuit: spring-type terminal Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	9.6 W
• per pole	3.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-40 +70 °C
 during storage 	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	30 36 A
operating voltage	
• rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	36 A
operational current at AC-3e at 400 V rated value	36 A
operating power	

• at AC-3	
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
	30 kW
— at 690 V rated value ● at AC-3e	SU KVV
	40 E MM
— at 400 V rated value	18.5 kW 22 kW
— at 500 V rated value — at 690 V rated value	30 kW
Auxiliary circuit	30 KVV
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal
UL/CSA ratings	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	36 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	36 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	36 A 36 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	36 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	36 A 36 A fuse gG: 6 A, quick: 10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	36 A 36 A fuse gG: 6 A, quick: 10 A
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No
full-load current (FLA) for 3-phase AC motor	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No spring-loaded terminals spring-loaded terminals
full-load current (FLA) for 3-phase AC motor	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No spring-loaded terminals spring-loaded terminals
UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No spring-loaded terminals spring-loaded terminals Top and bottom
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No spring-loaded terminals spring-loaded terminals Top and bottom
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm²) 1x (1 6 mm²)
full-load current (FLA) for 3-phase AC motor	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm²) 1x (1 6 mm²) 1x (1 6 mm²)
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing	36 A 36 A fuse gG: 6 A, quick: 10 A any Contactor mounting 102 mm 45 mm 84 mm No spring-loaded terminals spring-loaded terminals Top and bottom 1x (1 10 mm²) 1x (1 6 mm²)

• for auxiliary contacts - solid or stranded 2x (0.5 ... 2.5 mm²) - finely stranded with core end processing 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) - finely stranded without core end processing 2x (0.5 ... 1.5 mm²) • for AWG cables for auxiliary contacts 2x (20 ... 14) design of screwdriver shaft Diameter 3 mm size of the screwdriver tip 3,0 x 0,5 mm Safety related data failure rate [FIT] with low demand rate according to SN 31920 50 FIT MTTF with high demand rate 2 280 a T1 value for proof test interval or service life according to IEC 20 a 61508 IP20 protection class IP on the front according to IEC 60529 touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front display version for switching status Slide switch

Certificates/ approvals

General Product Approval

For use in hazardous locations



Confirmation









Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping



100







Confirmation

other

Railway

Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4PC0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-4PC0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4PC0


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-4PC0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4PC0/char



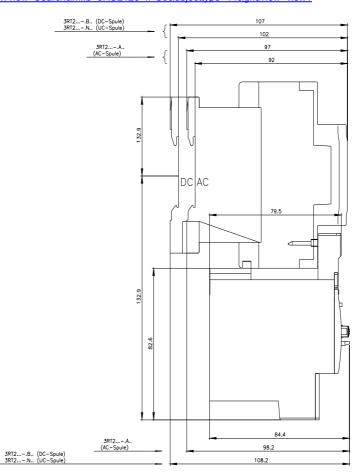

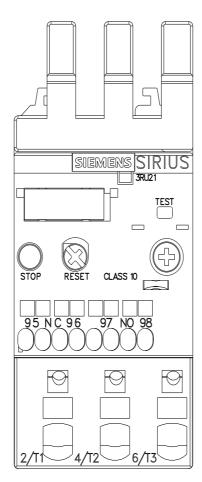

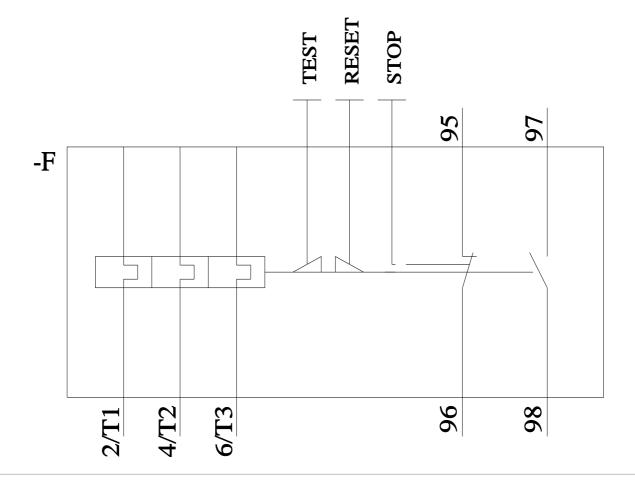

last modified: 3/8/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RU21264PC0