SIEMENS

Data sheet 3RU2136-4EB0



Overload relay 22...32 A Thermal For motor protection Size S2, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS	
product designation	thermal overload relay	
product type designation	3RU2	
General technical data		
size of overload relay	S2	
size of contactor can be combined company-specific	S2	
power loss [W] for rated value of the current at AC in hot operating state	13.8 W	
• per pole	4.6 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
maximum permissible voltage for protective separation in networks with grounded star point		
 between auxiliary and auxiliary circuit 	415 V	
 between auxiliary and auxiliary circuit 	415 V	
 between main and auxiliary circuit 	690 V	
between main and auxiliary circuit	690 V	
shock resistance according to IEC 60068-2-27	8g / 11 ms	
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD	
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001	
reference code according to IEC 81346-2	F	
Substance Prohibitance (Date)	10/15/2014	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
 during operation 	-40 +70 °C	
during storage	-55 +80 °C	
during transport	-55 +80 °C	
temperature compensation	-40 +60 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
adjustable current response value current of the current- dependent overload release	22 32 A	
operating voltage		
rated value	690 V	
at AC-3e rated value maximum	690 V	
operating frequency rated value	50 60 Hz	
operational current rated value	32 A	
	00.4	
operational current at AC-3e at 400 V rated value	32 A	

• at AC-3		
- at 500 V rated value - at 690 V rated value 30 kW • at AC-3e - at 400 V rated value 15 kW - at 590 V rated value 18.5 kW - at 690 V rated value 30 kW Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note for contactor disconnection number of NO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 • at 24 V 3 A • at 110 V 3 A • at 125 V • at 230 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V		
- at 690 V rated value • at AC-3e - at 400 V rated value - at 500 V rated value - at 690 V rated value - at 690 V rated value - at 690 V rated value 30 kW Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 24 V • at 24 V • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 24 V 2 A		
• at AC-3e		
- at 400 V rated value - at 500 V rated value - at 690 V rated value 30 kW Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note for message "Tripped" number of CO contacts for auxiliary contacts 0 operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 125 V • at 230 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V		
- at 500 V rated value - at 690 V rated value 30 kW Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 125 V • at 230 V • at 4400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 24 V • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 24 V		
— at 690 V rated value Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts onumber of CO contacts for auxiliary contacts • at 24 V • at 110 V • at 125 V • at 230 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 24 V 2 A		
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts • note note note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts onumber of CO contacts for auxiliary contacts • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V • at 24 V 2 A		
design of the auxiliary switch number of NC contacts for auxiliary contacts • note number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 125 V • at 230 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V 2 A		
number of NC contacts for auxiliary contacts ● note number of NO contacts for auxiliary contacts ● note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 ● at 24 V at 110 V at 120 V at 125 V at 230 V et at 230 V et at 400 V operational current of auxiliary contacts at DC-13 et 24 V 2 A		
 note number of NO contacts for auxiliary contacts note note for message "Tripped" number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 24 V 		
number of NO contacts for auxiliary contacts • note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V 2 A		
 note number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 24 V at 110 V at 120 V at 125 V at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V at 24 V 		
number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 o at 24 V o at 110 V o at 120 V o at 125 V o at 230 V o at 400 V o at 690 V operational current of auxiliary contacts at DC-13 o at 24 V o at 24 V 2 A		
operational current of auxiliary contacts at AC-15 • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V • at 400 V • at 690 V operational current of auxiliary contacts at DC-13 • at 24 V 2 A		
 at 24 V at 110 V at 120 V at 125 V at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V 3 A 3 A 4 A 2 A 2 A 2 A 		
 at 110 V at 120 V at 125 V at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V 3 A 3 A 4 A 0.75 A 2 A 		
 at 120 V at 125 V at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V 3 A 3 A 1 A 0.75 A 2 A 		
 at 125 V at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V 2 A 		
 at 230 V at 400 V at 690 V operational current of auxiliary contacts at DC-13 at 24 V 2 A 2 A 		
• at 400 V		
at 690 V Operational current of auxiliary contacts at DC-13 at 24 V 2 A		
operational current of auxiliary contacts at DC-13 • at 24 V 2 A		
• at 24 V 2 A		
a at 60 V		
♥ at 00 v		
• at 110 V 0.22 A		
• at 125 V 0.22 A		
• at 220 V 0.11 A		
design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required 6A (SCC less than equal to 0.5 kA; U less than equal to 260V)		
contact rating of auxiliary contacts according to UL B600 / R300		
Protective and monitoring functions		
trip class CLASS 10		
design of the overload release thermal		
UL/CSA ratings		
full-load current (FLA) for 3-phase AC motor		
• at 480 V rated value 32 A		
• at 600 V rated value 32 A		
Short-circuit protection		
design of the fuse link		
• for short-circuit protection of the auxiliary switch required fuse gG: 6 A, quick: 10 A		
Installation/ mounting/ dimensions		
mounting position any		
fastening method Contactor mounting		
height 90 mm		
width 55 mm		
depth 105 mm		
Connections/ Terminals		
product component removable terminal for auxiliary and No		
control circuit		
type of electrical connection		
• for main current circuit screw-type terminals		
• for auxiliary and control circuit screw-type terminals		
arrangement of electrical connectors for main current Top and bottom		
circuit		
type of connectable conductor cross-sections		
• for main contacts		
— solid or stranded 2x (1 35 mm²), 1x (1 50 mm²)		
	2x (1 25 mm²), 1x (1 35 mm²)	
• for AWG cables for main contacts 2x (18 2), 1x (18 1)		

type of connectable conductor cross-sections			
 for auxiliary contacts 			
 — solid or stranded 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
 for AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)		
tightening torque			
 for main contacts with screw-type terminals 	3 4.5 N⋅m		
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m		
design of screwdriver shaft	Diameter 5 6 mm		
size of the screwdriver tip	Pozidriv PZ 2		
design of the thread of the connection screw			
• for main contacts	M6		
 of the auxiliary and control contacts 	M3		
Safety related data			
T1 value for proof test interval or service life according to IEC 61508	20 a		
protection class IP on the front according to IEC 60529	IP20		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front		
Display			
display version for switching status	Slide switch		
Certificates/ approvals			
General Product Approval		For use in hazardous locations	

Confirmation











Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report

Special Test Certificate





Marine / Shipping





LRS







Confirmation

other

Railway

Special Test Certificate

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2136-4EB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2136-4EB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2136-4EB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2136-4EB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RU2136-4EB0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2136-4EB0&objecttype=14&gridview=view1

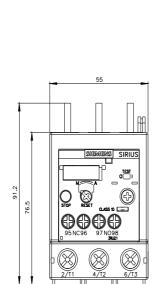

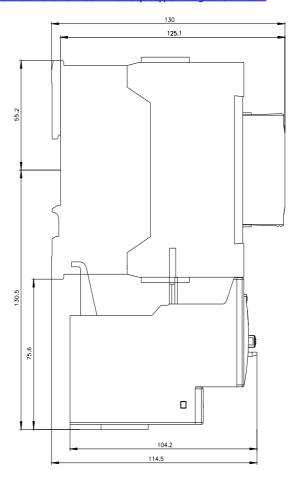

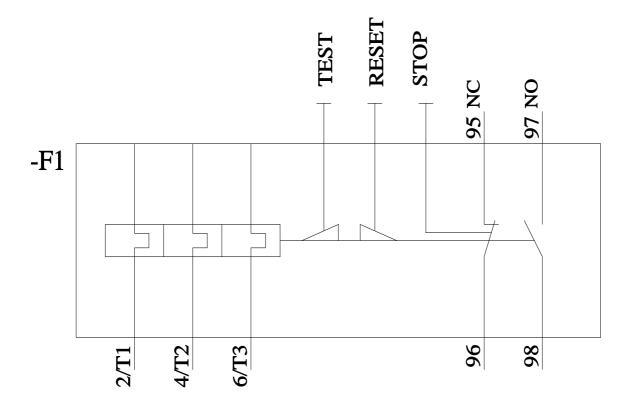

last modified: 3/8/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RU21364EB0