SIEMENS

Data sheet 3RV2711-1DD10



Circuit breaker size S00 for system protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 3.2 A N release 42 A screw terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For system protection according to UL 489/CSA C22.2 No. 5
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
at AC in hot operating state per pole	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
of auxiliary contacts typical	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	3.2 A
operational current	
 at AC-3 at 400 V rated value 	3.2 A
• at AC-3e at 400 V rated value	3.2 A
operating power	
• at AC-3	
— at 230 V rated value	0.6 kW

— at 400 V rated value	1.1 kW
— at 500 V rated value	1.5 kW
— at 690 V rated value	2.2 kW
• at AC-3e	
— at 230 V rated value	0.6 kW
— at 400 V rated value	1.1 kW
— at 500 V rated value	1.5 kW
— at 690 V rated value	2.2 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Protective and monitoring functions	10 1/11
product function	Na
ground fault detection	No
phase failure detection	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
 at AC at 240 V rated value 	100 kA
 at AC at 400 V rated value 	100 kA
 at AC at 500 V rated value 	100 kA
• at AC at 690 V rated value	10 kA
• at 480 AC Y/277 V according to UL 489 rated value	65 kA
operating short-circuit current breaking capacity (lcs) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	100 kA
at 500 V rated value	100 kA
at 690 V rated value	10 kA
response value current of instantaneous short-circuit trip unit	42 A
Short-circuit protection	
product function short circuit protection	Yes
p. 1 mart tamener. Chert off daily protocolors	
design of the short-circuit trip	magnetic
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
design of the fuse link for IT network for short-circuit	
design of the fuse link for IT network for short-circuit protection of the main circuit	gG 32 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	gG 32 A gG 32 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	gG 32 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	gG 32 A gG 32 A gG 25 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	gG 32 A gG 32 A gG 25 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards upwards at the side for grounded parts at 500 V downwards upwards at the side at the side upwards upwards at the side	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V	gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards	gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards upwards upwards upwards	gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards at the side for live parts at 500 V at the side for live parts at 500 V at the side at the side at the side for live parts at 500 V at the side at the side	gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards upwards upwards upwards	gG 32 A gG 32 A gG 32 A gG 25 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm

— upwards	70 mm	
— backwards	0 mm	
— at the side	30 mm	
— forwards	0 mm	
• for live parts at 690 V		
— downwards	70 mm	
— upwards	70 mm	
— backwards	0 mm	
— at the side	30 mm	
— forwards	0 mm	
Connections/ Terminals		
type of electrical connection		
for main current circuit	screw-type terminals	
arrangement of electrical connectors for main current circuit	Top and bottom	
type of connectable conductor cross-sections		
• for main contacts		
— solid or stranded	1 10 mm², max. 2x 10 mm²	
 finely stranded with core end processing 	1 16 mm², max. 6 + 16 mm²	
 for AWG cables for main contacts 	2x (14 10)	
tightening torque		
 for main contacts with screw-type terminals 	2.5 3 N·m	
design of screwdriver shaft	Diameter 5 to 6 mm	
size of the screwdriver tip	Pozidriv size 2	
design of the thread of the connection screw		
• for main contacts	M4	
Safety related data		
B10 value		
 with high demand rate according to SN 31920 	5 000	
proportion of dangerous failures		
 with low demand rate according to SN 31920 	50 %	
 with high demand rate according to SN 31920 	50 %	
failure rate [FIT]		
 with low demand rate according to SN 31920 	50 FIT	
T1 value for proof test interval or service life according to IEC 61508	10 a	
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
display version for switching status	Handle	
Certificates/ approvals		
General Product Approval		Declaration of Conformity
Confirmation (U)	EAC	UK



Declaration of Conformity **Test Certificates** Marine / Shipping other



Type Test Certificates/Test Report

ccc

Special Test Certific-<u>ate</u>





Confirmation

	other	Railway
--	-------	---------



Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2711-1DD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2711-1DD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1DD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2711-1DD10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1DD10/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2711-1DD10&objecttype=14&gridview=view1

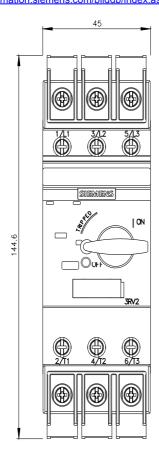

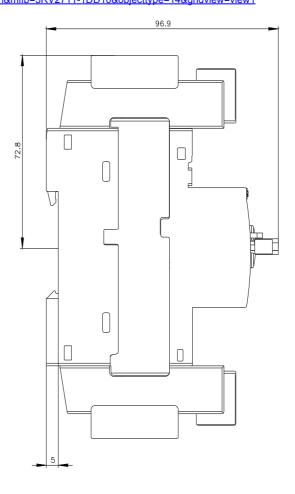

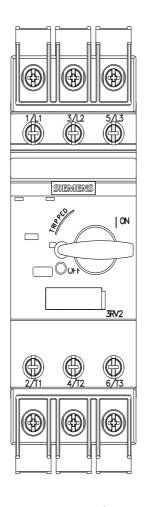

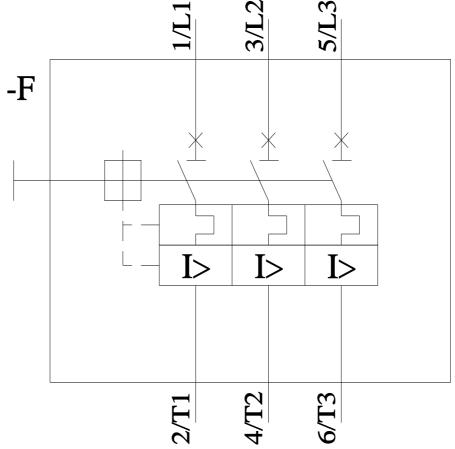

last modified: 5/1/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV27111DD10