SIEMENS

Data sheet 3RV2811-0HD10



Circuit breaker size S00 for transformer protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 0.8 A N-release 16 A screw terminal Standard switching capacity

product brand name	SIRIUS		
product designation	Circuit breaker		
design of the product	For transformer protection according to UL 489/CSA C22.2 No.5		
product type designation	3RV2		
General technical data			
size of the circuit-breaker	S00		
product extension auxiliary switch	Yes		
power loss [W] for rated value of the current			
 at AC in hot operating state 	5.5 W		
at AC in hot operating state per pole	1.8 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)		
mechanical service life (operating cycles)			
 of the main contacts typical 	100 000		
of auxiliary contacts typical	100 000		
electrical endurance (operating cycles) typical	100 000		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	10/01/2009		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
 during operation 	-20 +60 °C		
during storage	-50 +80 °C		
during transport	-50 +80 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
operating voltage			
• rated value	20 690 V		
 at AC-3 rated value maximum 	690 V		
at AC-3e rated value maximum	690 V		
operating frequency rated value	50 60 Hz		
operational current rated value	0.8 A		
operational current			
 at AC-3 at 400 V rated value 	0.8 A		
at AC-3e at 400 V rated value	0.8 A		
operating power			
• at AC-3			
— at 230 V rated value	0.1 kW		

— at 400 V rated value	0.2 kW
— at 500 V rated value	0.3 kW
— at 690 V rated value	0.4 kW
• at AC-3e	
— at 230 V rated value	0.1 kW
— at 400 V rated value	0.2 kW
— at 500 V rated value	0.3 kW
— at 690 V rated value	0.4 kW
operating frequency	U.T RVV
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Protective and monitoring functions	
product function	
 ground fault detection 	No
phase failure detection	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
 at AC at 240 V rated value 	100 kA
 at AC at 400 V rated value 	100 kA
• at AC at 500 V rated value	100 kA
at AC at 690 V rated value	100 kA
at 480 AC Y/277 V according to UL 489 rated value	65 kA
operating short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
at 400 V rated value at 400 V rated value	100 kA
	100 KA
at 500 V rated value	
at 690 V rated value	100 kA
response value current of instantaneous short-circuit trip unit	16 A
Short-circuit protection	
product function short circuit protection	Yes
desires of the chart singuit tries	magnetic
design of the short-circuit trip	magnetio
design of the fuse link for IT network for short-circuit protection of the main circuit	
design of the fuse link for IT network for short-circuit	gG 6 A
design of the fuse link for IT network for short-circuit protection of the main circuit	
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V	
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions	gG 6 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position	gG 6 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method	gG 6 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	gG 6 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	gG 6 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	gG 6 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • at the side • at the side — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • at the side • at the side — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — at the side • for grounded parts at 500 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side	gG 6 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side	gG 6 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards at the side for grounded parts at 500 V downwards at the side for live parts at 500 V downwards upwards at the side for grounded parts at 690 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing at for grounded parts at 400 V at downwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards at the side for live parts at 500 V downwards at the side for live parts at 500 V downwards at the side for live parts at 500 V downwards at the side for grounded parts at 500 V downwards at the side for grounded parts at 690 V downwards at the side for grounded parts at 690 V downwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards at the side for grounded parts at 500 V downwards at the side for live parts at 500 V downwards upwards at the side for grounded parts at 690 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm

— at the side	30 mm		
— forwards	0 mm		
• for live parts at 690 V			
— downwards	70 mm		
— upwards	70 mm		
— backwards	0 mm		
— at the side	30 mm		
— forwards	0 mm		
Connections/ Terminals			
type of electrical connection			
for main current circuit	screw-type terminals		
arrangement of electrical connectors for main current circuit	Top and bottom		
type of connectable conductor cross-sections			
• for main contacts			
 solid or stranded 	1 10 mm², max. 2x 10 mm²		
 finely stranded with core end processing 	1 16 mm², max. 6 + 16 mm²		
for AWG cables for main contacts	2x (14 10)		
tightening torque			
for main contacts with screw-type terminals	2.5 3 N·m		
design of screwdriver shaft	Diameter 5 to 6 mm		
size of the screwdriver tip	Pozidriv size 2		
design of the thread of the connection screw			
• for main contacts	M4		
Safety related data			
B10 value			
with high demand rate according to SN 31920	5 000		
proportion of dangerous failures			
 with low demand rate according to SN 31920 	50 %		
with high demand rate according to SN 31920	50 %		
failure rate [FIT]			
with low demand rate according to SN 31920	50 FIT		
T1 value for proof test interval or service life according to IEC 61508	10 a		
protection class IP on the front according to IEC 60529	IP20		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front		
display version for switching status	Handle		
Certificates/ approvals			
One and Decident Assessed		Declaration of Con-	

General Product Approval

Declaration of Conformity

Confirmation





<u>KC</u>



CE EG-Konf.

Declaration of Conformity

Test Certificates

Marine / Shipping

other

UK CA Type Test Certificates/Test Report

Special Test Certificate





Confirmation

other

Railway



Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2811-0HD10

Cax online generator

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-0HD10

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2811-0HD10&lang=en


Characteristic: Tripping characteristics, I^2t , Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-0HD10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2811-0HD10&objecttype=14&gridview=view1

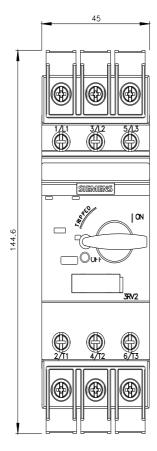

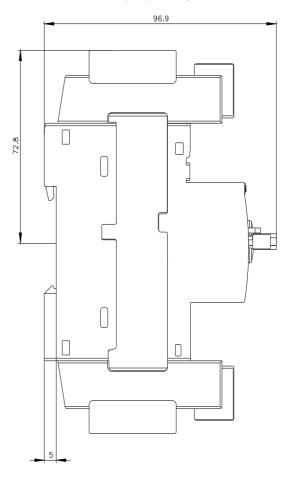

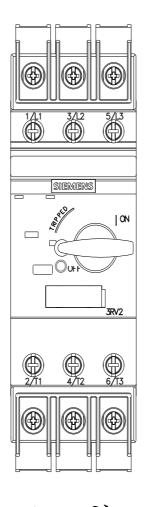

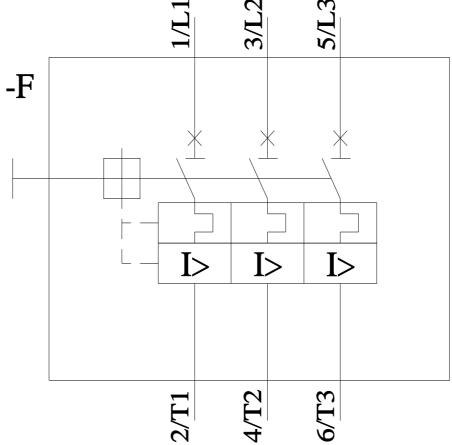

last modified: 5/1/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV28110HD10