SIEMENS

Data sheet 3RV2821-4CD10



Circuit breaker size S0 for transformer protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 22 A N-release 364 A screw terminal Standard switching capacity

product brand name	SIRIUS	
product designation	Circuit breaker	
design of the product	For transformer protection according to UL 489/CSA C22.2 No.5	
product type designation	3RV2	
General technical data		
size of the circuit-breaker	S0	
product extension auxiliary switch	Yes	
power loss [W] for rated value of the current		
 at AC in hot operating state 	10.5 W	
at AC in hot operating state per pole	3.5 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)	
mechanical service life (operating cycles)		
 of the main contacts typical 	100 000	
of auxiliary contacts typical	100 000	
electrical endurance (operating cycles) typical	100 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
 during operation 	-20 +60 °C	
during storage	-50 +80 °C	
during transport	-50 +80 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
operating voltage		
rated value	20 690 V	
 at AC-3 rated value maximum 	690 V	
at AC-3e rated value maximum	690 V	
operating frequency rated value	50 60 Hz	
operational current rated value	22 A	
operational current		
 at AC-3 at 400 V rated value 	22 A	
at AC-3e at 400 V rated value	22 A	
operating power		
• at AC-3		
— at 230 V rated value	5.5 kW	

— at 400 V rated value	11 kW
— at 500 V rated value	11 kW
— at 690 V rated value	18.5 kW
• at AC-3e	
— at 230 V rated value	5.5 kW
— at 400 V rated value	11 kW
— at 500 V rated value	11 kW
— at 690 V rated value	18.5 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Protective and monitoring functions	
product function	
 ground fault detection 	No
phase failure detection	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
at AC at 400 V rated value	55 kA
at AC at 500 V rated value at AC at 500 V rated value	10 kA
at AC at 500 V rated value at AC at 690 V rated value	4 kA
	4 KA 50 kA
at 480 AC Y/277 V according to UL 489 rated value	JU IM
operating short-circuit current breaking capacity (Ics) at AC	400.14
• at 240 V rated value	100 kA
• at 400 V rated value	25 kA
at 500 V rated value	5 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip unit	364 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit	magnetic
design of the fuse link for IT network for short-circuit	magnetic gG 63 A
design of the fuse link for IT network for short-circuit protection of the main circuit	
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	gG 63 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	gG 63 A gG 50 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	gG 63 A gG 50 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	gG 63 A gG 50 A gG 50 A
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	gG 63 A gG 50 A gG 50 A any
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards upwards at the side for grounded parts at 500 V downwards at the side for grounded parts at 500 V downwards	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards upwards upwards upwards upwards upwards	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards upwards at the side for grounded parts at 500 V downwards upwards at the side at the side upwards at the side	gG 63 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards	gG 63 A gG 50 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards upwards upwards upwards	gG 63 A gG 50 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards at the side for live parts at 500 V at the side for live parts at 500 V at the side at the side at the side for live parts at 500 V at the side at the side	gG 63 A gG 50 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing for grounded parts at 400 V downwards upwards at the side for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards at the side for live parts at 500 V downwards upwards upwards upwards upwards	gG 63 A gG 50 A gG 50 A gG 50 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm

— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	70 mm
— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
• for main contacts	
— solid or stranded	1 10 mm², max. 2x 10 mm²
 finely stranded with core end processing 	1 16 mm², max. 6 + 16 mm²
 for AWG cables for main contacts 	2x (14 10)
tightening torque	
 for main contacts with screw-type terminals 	2.5 3 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	
• for main contacts	M4
Safety related data	
B10 value	
 with high demand rate according to SN 31920 	5 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	50 %
 with high demand rate according to SN 31920 	50 %
failure rate [FIT]	
with low demand rate according to SN 31920	50 FIT
T1 value for proof test interval or service life according to IEC 61508	10 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
display version for switching status	Handle
Certificates/ approvals	
General Product Approval	Declaration of Conformity
Confirmation (U)	



Declaration of Conformity **Test Certificates** Marine / Shipping other



Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>





Confirmation

other Railway



Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2821-4CD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2821-4CD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2821-4CD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2821-4CD10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2821-4CD10/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2821-4CD10&objecttype=14&gridview=view1

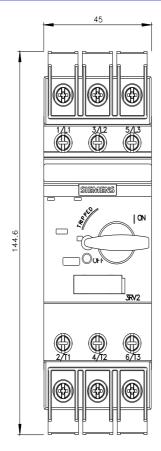

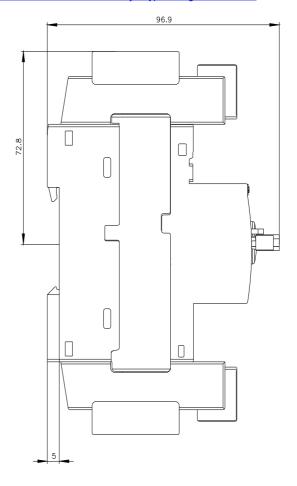

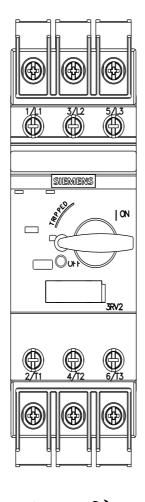

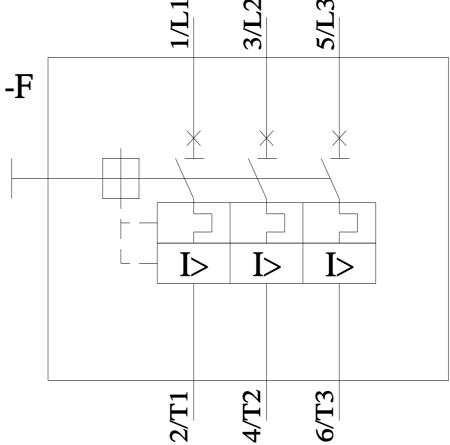

last modified: 5/1/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RV28214CD10