## **SIEMENS**

Data sheet 3RW5075-6TB05

SIRIUS



SIRIUS soft starter 200-600 V 370 A, 24 V AC/DC Screw terminals Thermistor input

Figure similar

product brand name

product branchine	Cit (i C C
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
<ul> <li>of standard HMI module usable</li> </ul>	3RW5980-0HS01
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00
• of communication module PROFINET standard usable	3RW5980-0CS00
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1 334-2; Type of coordination 2, Iq = 65 kA
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE3 336: Type of coordination 2, Iq = 65 kA
<ul> <li>of line contactor usable up to 480 V</li> </ul>	<u>3RT1075</u>
<ul> <li>of line contactor usable up to 690 V</li> </ul>	3RT1075
General technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
• is supported HMI-Standard	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
for main current circuit	100 ms

e for control circuit	100 mg
• for control circuit	100 ms
insulation voltage rated value	600 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 600 V
service factor	1
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	2001/
between main and auxiliary circuit	600 V
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53a Q
reference code according to IEC 81346-2	
Substance Prohibitance (Date)	09/23/2019
product function	Von
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
Soft Torque     adjustable current limitation	Yes
adjustable current limitation	Yes
pump ramp down     intrinsic dovice protection	Yes
intrinsic device protection     mater everland protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
communication function	Yes
operating measured value display	Yes; Only in conjunction with special accessories
error logbook     via aeftware parameterizable	Yes; Only in conjunction with special accessories
via software parameterizable	No Voc
• via software configurable	Yes
<ul><li>PROFlenergy</li><li>voltage ramp</li></ul>	Yes; in connection with the PROFINET Standard communication module Yes
torque control	No
analog output	No
Power Electronics	NO
operational current	
at 40 °C rated value	370 A
at 50 °C rated value	328 A
at 50 °C rated value     at 60 °C rated value	328 A 300 A
operating voltage	000 A
rated value	200 600 V
relative negative tolerance of the operating voltage	-15 %
relative negative tolerance of the operating voltage	10 %
operating power for 3-phase motors	
at 230 V at 40 °C rated value	110 kW
at 400 V at 40 °C rated value	200 kW
at 500 V at 40 °C rated value	250 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
adjustable motor current	
at rotary coding switch on switch position 1	160 A
at rotary coding switch on switch position 2	174 A
<ul> <li>at rotary coding switch on switch position 3</li> </ul>	188 A
at rotary coding switch on switch position 4	202 A
at rotary coding switch on switch position 5	216 A
at rotary coding switch on switch position 6	230 A
at rotary coding switch on switch position 7	244 A

<ul> <li>at rotary coding switch on switch position 8</li> </ul>	258 A
<ul> <li>at rotary coding switch on switch position 9</li> </ul>	272 A
<ul> <li>at rotary coding switch on switch position 10</li> </ul>	286 A
<ul> <li>at rotary coding switch on switch position 11</li> </ul>	300 A
<ul> <li>at rotary coding switch on switch position 12</li> </ul>	314 A
<ul> <li>at rotary coding switch on switch position 13</li> </ul>	328 A
<ul> <li>at rotary coding switch on switch position 14</li> </ul>	342 A
<ul> <li>at rotary coding switch on switch position 15</li> </ul>	356 A
<ul> <li>at rotary coding switch on switch position 16</li> </ul>	370 A
• minimum	160 A
minimum load [%]	15 %; Relative to smallest settable le
power loss [W] for rated value of the current at AC	
at 40 °C after startup	36 W
• at 50 °C after startup	29 W
• at 60 °C after startup	24 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	3 726 W
at 50 °C during startup	3 124 W
at 60 °C during startup	2 748 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at	-20 %
AC at 50 Hz	-20 /0
relative positive tolerance of the control supply voltage at	20 %
AC at 50 Hz relative negative tolerance of the control supply voltage at	-20 %
AC at 60 Hz relative positive tolerance of the control supply voltage at	20 %
AC at 60 Hz	
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage	-10 %
frequency	
	10 %
relative positive tolerance of the control supply voltage	
relative positive tolerance of the control supply voltage frequency	
frequency relative positive tolerance of the control supply voltage frequency control supply voltage	10 %
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at	10 %
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at	10 % 24 V -20 %
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC	10 % 24 V -20 % 20 %
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value	10 %  24 V -20 %  20 %  160 mA
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value	10 %  24 V -20 %  20 %  160 mA 490 mA
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage	10 %  24 V -20 %  20 %  160 mA 490 mA 7.6 A
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage	10 %  24 V -20 %  20 %  160 mA 490 mA 7.6 A 3.3 A
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply	10 %  24 V -20 %  20 %  160 mA 490 mA 7.6 A 3.3 A  12.1 ms
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit	10 %  24 V -20 %  20 %  160 mA 490 mA 7.6 A 3.3 A  12.1 ms  Varistor  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A  12.1 ms  Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit	10 %  24 V -20 %  20 %  160 mA 490 mA 7.6 A 3.3 A  12.1 ms  Varistor  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital inputs  number of digital outputs	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms  Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital inputs  number of digital outputs  • not parameterizable	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms  Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital inputs  number of digital outputs  • not parameterizable  digital output version	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A  12.1 ms  Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply  1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital outputs  • not parameterizable  digital output version  number of analog outputs	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms  Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital inputs  • not parameterizable  digital output version  number of analog outputs  switching capacity current of the relay outputs	24 V -20 %  20 %  160 mA 490 mA 7.6 A 3.3 A  12.1 ms  Varistor  4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply  1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 0
relative positive tolerance of the control supply voltage frequency  control supply voltage  • at DC rated value  relative negative tolerance of the control supply voltage at DC  relative positive tolerance of the control supply voltage at DC  control supply current in standby mode rated value  holding current in bypass operation rated value  inrush current by closing the bypass contacts maximum  inrush current peak at application of control supply voltage maximum  duration of inrush current peak at application of control supply voltage  design of the overvoltage protection  design of short-circuit protection for control circuit  Inputs/ Outputs  number of digital outputs  • not parameterizable  digital output version  number of analog outputs	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A  12.1 ms  Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply  1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)

nstallation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method	screw fixing
height	230 mm
width	160 mm
depth	282 mm
required spacing with side-by-side mounting	
• forwards	10 mm
<ul><li>backwards</li></ul>	0 mm
• upwards	100 mm
<ul><li>downwards</li></ul>	75 mm
at the side	5 mm
weight without packaging	7.3 kg
onnections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	screw-type terminals
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm
wire length for thermistor connection	
with conductor cross-section = 0.5 mm² maximum	50 m
with conductor cross-section = 1.5 mm² maximum	150 m
with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
<ul> <li>for main contacts for box terminal using the front clamping point solid</li> </ul>	95 300 mm²
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded with core end processing</li> </ul>	70 240 mm²
<ul> <li>for main contacts for box terminal using the front clamping point finely stranded without core end processing</li> </ul>	70 240 mm²
<ul> <li>for main contacts for box terminal using the front clamping point stranded</li> </ul>	95 300 mm²
for main contacts for box terminal using the back clamping point solid	120 240 mm²
for AWG cables for main contacts for box terminal using the back clamping point	250 500 kcmil
for main contacts for box terminal using both clamping points solid      for main contacts for box terminal using both clamping.	min. 2x 70 mm², max. 2x 240 mm²
<ul> <li>for main contacts for box terminal using both clamping points finely stranded with core end processing</li> <li>for main contacts for box terminal using both clamping</li> </ul>	min. 2x 50 mm², max. 2x 185 mm²
points finely stranded without core end processing  • for main contacts for box terminal using both clamping	min. 2x 50 mm², max. 2x 185 mm² min. 2x 70 mm², max. 2x 240 mm²
points stranded  • for main contacts for box terminal using the back	120 185 mm <sup>2</sup>
clamping point finely stranded with core end processing  • for main contacts for box terminal using the back	120 185 mm <sup>2</sup>
<ul><li>clamping point finely stranded without core end processing</li><li>for main contacts for box terminal using the back</li></ul>	120 240 mm²
clamping point stranded	
type of connectable conductor cross-sections	
for AWG cables for main current circuit solid	2/0 500 kcmil
for DIN cable lug for main contacts stranded	50 240 mm²
for DIN cable lug for main contacts finely stranded	70 240 mm²
type of connectable conductor cross-sections	
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
• for control circuit finely stranded with core end processing	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
for AWG cables for control circuit solid	1x (20 12), 2x (20 14)
wire length	
<ul> <li>between soft starter and motor maximum</li> </ul>	800 m
at the digital inputs at AC maximum	1 000 m
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	14 24 N·m
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	0.8 1.2 N·m

tightening torque [lbf·in]	
for main contacts with screw-type terminals	124 210 lbf·in
for auxiliary and control contacts with screw-type	7 10.3 lbf·in
terminals	7 10.0 IST III
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; derating as of 1000 m, see Manual
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
<ul> <li>during storage and transport</li> </ul>	-40 +80 °C
environmental category	
<ul> <li>during operation according to IEC 60721</li> </ul>	3 K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), $3 M6$
<ul> <li>during storage according to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 $$
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
<ul> <li>PROFINET standard</li> </ul>	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
of the fuse	
<ul> <li>usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class L, max. 1200 A; lq = 18 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class L, max. 1200 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
<ul> <li>at 200/208 V at 50 °C rated value</li> </ul>	100 hp
• at 220/230 V at 50 °C rated value	125 hp
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>	250 hp
• at 575/600 V at 50 °C rated value	300 hp
Safety related data	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEX	Yes
• UKEX	Yes
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a
Certificates/ approvals	
General Product Approval	For use in hazard- ous locations
Confirmation	·











**Test Certificates** Marine / Shipping For use in hazardous locations **Declaration of Conformity** 



Explosion Protection Certificate



Type Test Certificates/Test Report



Marine / Shipping

other





Confirmation

## **Further information**

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5075-6TB05

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5075-6TB05

 $Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RW5075-6TB05

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5075-6TB05&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5075-6TB05/char


Characteristic: Installation altitude


 $\underline{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5075-6TB05\&objecttype=14\&gridview=view1}$ 

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

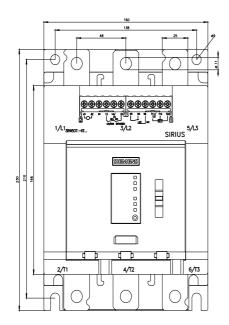

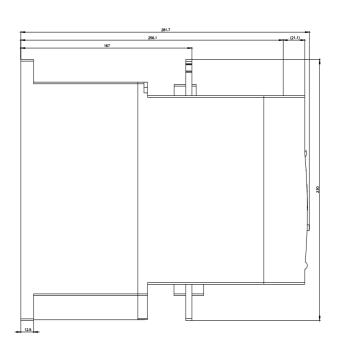

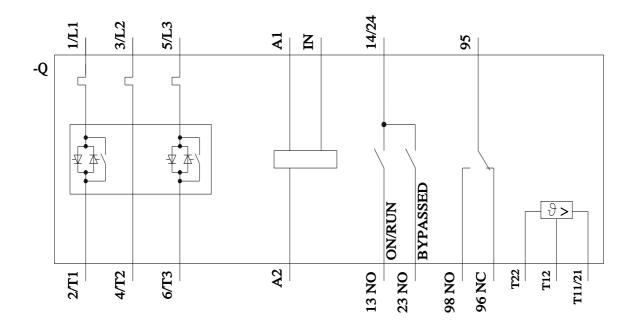

last modified: 1/14/2023 🖸

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RW50756TB05