SIEMENS

Data sheet 3RW5526-1HF14

SIRIUS



SIRIUS soft starter 200-480 V 77 A, 110-250 V AC, Screw terminals Fail-safe

Figure similar

product brand name

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Failsafe soft starters
product type designation	3RW55
manufacturer's article number	
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
• of communication module PROFINET high-feature usable	3RW5950-0CH00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V 	3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10
• of circuit breaker usable at 400 V at inside-delta circuit	3VA2216-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
• of circuit breaker usable at 500 V at inside-delta circuit	3VA2216-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of the gG fuse usable up to 690 V 	3NA3132-6; Type of coordination 1, Iq = 65 kA
 of the gG fuse usable at inside-delta circuit up to 500 V 	3NA3132-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1224-0: Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3227; Type of coordination 2, Iq = 65 kA
 of the redundant contactor for applications > SIL 1 according to EN 62061 	<u>3RT1055</u>
 of the redundant contactor for applications > SIL 1 at inside-delta circuit according to EN 62061 	3RT1055
 of the redundant contactor for applications > SIL 1 according to EN ISO 13849-1 	3RT1056
 of the redundant contactor for applications > SIL 1 at inside-delta circuit according to EN ISO 13849-1 	<u>3RT1056</u>
General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s

number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	,
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	10 00 //
• for main current circuit	100 ms
• for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	O KV
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	11/22/2019
product function	11/22/2013
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
breakaway pulse	Yes
adjustable current limitation	Yes
creep speed in both directions of rotation	Yes
pump ramp down	Yes
DC braking	Yes
motor heating	Yes
slave pointer function	Yes
trace function	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
 evaluation of thermistor motor protection inside-delta circuit 	Yes
inside-della circuit auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes
communication function	Yes
	Yes
 operating measured value display event list 	Yes
error logbook via coftware parameterizable	Yes
via software parameterizable via software configurable	Yes
via software configurable	Yes
screw terminal	Yes
spring-loaded terminal	No
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules

• Immovable terminal for control circuit • Indiage ramp • Indiage commod • Combined braking • Ves • Comparimable control inputsioutputs • Comparimable control inputsioutputs • Comparimable control inputsioutputs • Comparimable control inputsioutputs • Ves • Septimization vituans • Comparimable control inputsioutputs • Ves • Septimization vituans • Comparimable control inputsioutputs • Ves • Septimization vituans • Comparimable control inputsioutputs • Ves • Septimization vituans • Comparimable control inputsioutputs • Ves • Septimization vituans • Comparimable control inputsioutputs • Comparimable control inputsion inputsio	firmware update	Yes
• consider to training • torque control • consider braining • reside control • consider braining • reside control injusts outputs • consider monitoring • resider parameterisation • explication wizers • explication of the control supply voltage • explication of the event of the control supply voltage • explication of the provider wisers • explication of the providing frequency • explication of the providing of the control supply voltage • explication of the providing of the control supply voltage • explication of the contro	•	
e combined braiking combined braiking ves condition monotrolling ves condition condition ves condition condition ves condition condition ves condition c		
e contained braking erranding output erranding control inputs'outputs erranding output erranding control inputs'outputs erranding control more erranding portation erranding portation erranding portation erranding control inputs'outputs erranding control inputs'out		
anakog output rocgrammable control inputs/outputs rocgrammable control inputs/outputs rocgrammable parameterisation autornatic parameterisation autornatic parameterisation autornatic parameterisation autornatic parameterisation autornatic parameterisation autornatic parameterisation yes autornatic parameterisation Yes alternative run-down yes autornatic goveration autornatic presention autornatic presention yes autornatic goveration poverational current autornatic current autornatic goveration autornatic value autornatic value autornatic value autornatic value autornatic value autornatic value autornatic-ollar circular autornatic value autornatic value autornatic value autornatic-ollar circular autorn	·	
e programmable control inputs outputs condition monitoring control commotioning control commotioning control c	-	
outdinating parameterisation ves application wicards ves application wicards ves alternative run-down ves emergency operation mode ves verorising operation ves verorising a heavy starting conditions ves ves verorising operation ves ves verorising operation ves		
automatic parameterisation provided in Ves application Vasdes alternative run-down emergency operation mode eversering operation yes and starting at heavy starting conditions yes soft starting at heavy starting conditions yes power Electronics power alternative run-down 18		
application wizards alternative run down alternative run alternative run alternative run alternative run alternat	-	
eliternative run down emergency operation mode erroversing operation yes soft starting at heavy starting conditions Power Electroduces powerational current et al. 40 °C rated value et al. 40 °C rated value minimum et al. 40 °C rated value et al. 40 °C rated value et al. 40 °C rated value et al	·	
emergency operation mode increasing operation increasing operations Power Electronics perational current increasing operations perational current increasing operations perational current increasing operations perational current increasing operations at 40 °C rated value increasing operations increasing operation	• •	
e reserving operation e so that tring at heavy starting conditions yes power discrimins operational current • at 40°C rated value • at 60°C rated value		
e soft starting at heavy starting conditions Power Electronics		
perational current at 40 °C rated value at 40 °C rated value at 40 °C rated value at 50 °C rated value at 60 °C rated value at		
operational current at 40 °C rated value at 40 °C rated value at 50 °C rated value at 60 °C		tes
• at 40 °C rated value 77 A • at 40 °C rated value 68 A • at 50 °C rated value 62 A • at 50 °C rated value 62 A • at 50 °C rated value 133 A • at 50 °C rated value 133 A • at 50 °C rated value 133 A • at 50 °C rated value 138 A • at 50 °C rated value 118 A • at 50 °C rated value 107 A • at 50 °C rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at landed-deta circuit rated value 200 480 V • at 230 V at 10 °C rated value 200 480 V • at 230 V at 10 °C rated value 22 kW • at 400 V at 10 °C rated value 37 kW • at 400 V at 10 °C rated value 37 kW • at 400 V at 10 °C rated value 37 kW • at 400 V at 10 °C rated value 50 Hz Operating frequency 1 rated value 50 Hz Operating frequency 2 rated value 60 Hz Operating frequency 3 rated value 60 Hz Operating frequency 4 rated value 60 Hz Operating frequency 5 rated value 60 Hz Operating frequency 6 rated value 60 Hz Operating frequency 7 rated value 60 Hz Operating frequency 8 rated value 60 Hz Operating frequency 9 rated value 60 Hz Operating frequency 1 rated value 60 Hz Operating frequency 1 rated value 60 Hz Operating frequency 1 rated value 60 H		
e at 40 °C rated value minimum e at 50 °C rated value e at 60 °C rated value e rated value e rated value e rated value e at 100 °C rated value e at 100 °C rated value e at 100 °C rated value e rated value e rated value e rated value e at 100 °C rated value e rated value relative negative tolerance of the operating voltage e rated value rated value postative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at 10 % relative positive tolerance of the operating voltage at 10 % relative positive tolerance of the operating voltage at 10 % relative positive tolerance of the operating voltage at 10 % relative positive tolerance of the operating voltage at 10 % relative positive tolerance of the operating frequency rated value e at 400 V at 100 °C rated value e at 400 V at inside-delta circuit at 40 °C rated value 50 Fiz Operating frequency 2 rated value 50 Fiz Operating frequency 2 rated value 60 Fiz relative negative tolerance of the operating frequency 10 % relative negative tolerance of the operating frequency 10 % relative negative tolerance of the operating frequency 10 % e at 60 °C after startup 20 W e at 60 °C dafter startup 90 Voltage of the current limitation 350 % e at 40 °C after startup 921 W e at 60 °C during startup	•	A
at 50 °C rated value at 60 °C rated value at 50 °C rated value at 60 °C rated value be 60 °C rated value at 60 °C rated value at 60 °C rated value be 60 °C rated value cretative negative tolerance of the operating frequency at 60 °C rated value at 60 °C rate value at 60 °C rated v		
e at 60 °C rated value operational current at inside-delta circuit at 40 °C rated value at 60 °C rated valu		
operational current at inside-delta circuit at 40 °C rated value 118 A 128 A		
at 40 °C rated value at 50 °C rated value 118 A at 60 °C rated value 107 A poperating voltage rated value 200 480 V relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage 115 % relative positive tolerance of the operating voltage at inside-delta circuit rated value 200 480 V relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 V at 10 °C rated value 22 kW at 230 V at 10 °C rated value 22 kW at 430 V at inside-delta circuit at 40 °C rated value 37 kW at 400 V at inside-delta circuit at 40 °C rated value 37 kW bat 400 V at inside-delta circuit at 40 °C rated value 41 400 V at 10 °C rated value 41 400 V at operating frequency 10 % Coperating frequency 1 rated value 42 between the control supply voltage at at 40 °C after startup 41 between the control supply voltage 41 between the control supply voltage at AC at 50 Hz 41 bet		02 A
at 60 °C rated value at 60 °C rated value 107 A porating voltage at inside-delta circuit rated value 200 480 V at inside-delta circuit rated value 200 480 V relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 V at 40 °C rated value 22 kW at 230 V at 40 °C rated value 37 kW at 400 V at 40 °C rated value 37 kW at 400 V at 100 °C rated value 50 Hz Operating frequency 1 rated value Operating frequency 2 rated value 50 Hz relative positive tolerance of the operating frequency 10 % relative positive tolerance of the operating frequency 10 % minimum load [%] 10 % Relative to set le power loss [W] for rated value of the current at AC at 40 °C after startup 23 W at 50 °C after startup 20 W at 60 °C after startup 20 W at 60 °C after startup 21 W at 60 °C after startup 22 W at 60 °C after startup 23 W at 60 °C after startup 24 two 50 °C after startup 25 W at 60 °C after startup 26 W at 60 °C after startup 27 W 38	•	400 A
e at 60 °C rated value operating voltage * rated value • at inside-delta circuit rated value 200 480 V relative negative tolerance of the operating voltage at inside-delta circuit rolative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 10 °C rated value • at 400 V at or 10 °C rated value • at 400 V at at 0 °C rated value • at 400 V at at 0 °C rated value • at 400 V at or 10 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value 75 kW Operating frequency 1 rated value 60 Hz relative negative tolerance of the operating frequency rolative positive tolerance of the operating frequency relative positive tolerance of the operating frequency rolative positive tolerance of the operating frequency 10 % relative negative tolerance of the operating frequency rolative positive tolerance of the operating frequency 10 %; Relative to set le power loss [W] for rated value of the current at AC • at 40 °C after startup • at 60 °C during		
operating voltage * rated value * at inside-delta circuit rated value * at inside-delta circuit rated value relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors * at 230 V at 40 °C rated value * at 230 V at inside-delta circuit at 40 °C rated value * at 420 V at 40 °C rated value * at 420 V at inside-delta circuit at 40 °C rated value * at 400 V at 40 °C rated value * at 400 V at inside-delta circuit at 40 °C rated value * at 400 V at inside-delta circuit at 40 °C rated value * operating frequency 1 rated value Operating frequency 2 rated value * on Hard Value of the operating frequency In % minimum load [%] power loss [W] for rated value of the current at AC * at 40 °C after startup * at 60 °C during startup * at 6		
* rated value** at Inside-delta circuit rated value** 200 480 V** 200 480 V** relative delta circuit rated value** 200 480 V** relative positive tolerance of the operating voltage at inside-delta circuit** 10 % relative positive tolerance of the operating voltage at inside-delta circuit** 10 % inside-delta circuit** 140 °C rated value** 22 kW** at 400 V at 10 °C rated value** 37 kW** at 400 V at 10 °C rated value** 37 kW** at 400 V at 10 °C rated value** 50 Hz** 20 Poerating frequency 1 rated value** 50 Hz** 20 Poerating frequency 1 rated value** 50 Hz** 20 Poerating frequency 1 rated value** 50 Hz** 23 W** 23 W** 23 W** 23 W** 24 W** 25 W**		107 A
e at inside-delta circuit rated value relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 V at 40 °C rated value e at 230 V at 1 inside-delta circuit at 40 °C rated value at 400 V at 40 °C rated value at 400 V at 1 inside-delta circuit at 40 °C rated value at 400 V at 1 inside-delta circuit at 40 °C rated value at 400 V at 1 inside-delta circuit at 40 °C rated value at 400 V at 1 inside-delta circuit at 40 °C rated value 50 Hz Operating frequency 1 rated value Operating frequency 1 rated value 60 Hz relative negative tolerance of the operating frequency 10 % relative positive tolerance of the operating frequency 10 % minimum load [%] power loss [W] for rated value of the current at AC e at 40 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C during startup at 60		
relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at relative negative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at thinded-delta circuit at 40 °C rated value • at 400 V at thinded-delta circuit at 40 °C rated value • at 400 V at thinded-delta circuit at 40 °C rated value • at 400 V at thinded-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • by at 400 V at 100 V at		
relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit at 40 °C rated value 22 kW at 230 V at 40 °C rated value 37 kW at 400 V at 40 °C rated value 37 kW at 400 V at 40 °C rated value 37 kW at 400 V at 40 °C rated value 50 Hz Operating frequency 1 rated value 50 Hz Operating frequency 2 rated value 60 Hz relative negative tolerance of the operating frequency 10 % relative positive tolerance of the operating frequency 10 % relative positive tolerance of the operating frequency 10 % relative positive tolerance of the current at AC at 50 °C after startup 20 W at 50 °C after startup 19 W power loss [W] at AC at current limitation 350 % at 40 °C during startup 921 W at 50 °C duri		
relative negative tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 V at 40 °C rated value at 400 V at 10 °C rated value at 400 V at 10 °C rated value at 400 V at 10 °C rated value operating frequency 1 rated value at 400 V at 10 °C rated value operating frequency 1 rated value at 400 V at 10 °C rated value operating frequency 1 rated value operating frequency 2 rated value operating frequency 10 % inimum load [%] operating frequency 10 % inimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup at 60 °C after startup operating startup at 60 °C during startup at 60 °C during startup at 60 °C during startup et 40 °C during startup et 60 °C during startup e		
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 200 V at inside-delta circuit at 40 °C rated value • at 400 V at viside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • 50 Hz Operating frequency 1 rated value • 50 Hz Operating frequency 2 rated value • 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency at 50 °C after startup • at 50 °C after startup • at 50 °C after startup • at 60 °C after startup • at 50 °C during startup •		
inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup **Startup** **Startup*	inside-delta circuit	
at 230 V at 40 °C rated value at 230 V at 40 °C rated value at 400 V at 40 °C rated value 37 kW at 400 V at 40 °C rated value 37 kW at 400 V at inside-delta circuit at 40 °C rated value 75 kW Operating frequency 1 rated value 50 Hz Operating frequency 2 rated value relative negative tolerance of the operating frequency 10 % relative positive tolerance of the operating frequency inlimimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup 23 W at 50 °C after startup 20 W at 60 °C after startup 19 W power loss [W] at AC at current limitation 350 % at 40 °C during startup 21 W at 60 °C during startup 22 IW at 60 °C during startup 23 IW at 60 °C during startup 41 60 °C during startup 24 IW 55 C during startup 25 IW 56 C during startup 41 Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage 26 C control supply voltage at AC at 50 Hz 27 IN 250 V 28 relative negative tolerance of the control supply voltage at AC at 50 Hz 10 % AC at 50 Hz 10 %	inside-delta circuit	10 %
at 230 V at inside-delta circuit at 40 °C rated value at 400 V at 40 °C rated value at 400 V at 40 °C rated value 57 kW on at 400 V at inside-delta circuit at 40 °C rated value 75 kW Operating frequency 1 rated value 50 Hz Operating frequency 2 rated value 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency 10 % minimum load [%] 10 %; Relative to set le power loss [W] for rated value of the current at AC at 40 °C after startup 23 W at 50 °C after startup 20 W at 60 °C after startup 19 W power loss [W] at AC at current limitation 350 % at 40 °C during startup 10 83 W at 50 °C during startup 21 W at 60 °C during startup 22 W at 60 °C during startup 33 kW 41 W type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage AC control supply voltage at AC at 50 Hz 110 250 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz AC at 50 Hz 10 %		
at 400 V at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value 75 kW Operating frequency 1 rated value 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency 10 % minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup 23 W at 60 °C after startup 20 W at 60 °C after startup 19 W power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup et 60 °C during sta		22 kW
at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Felative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 60 °C after startup at 40 °C after startup at 40 °C during startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 60 °C during startup at 60 °C during startup be at 60 °C during startup at 60 °C during startup be at 60 °C during startup at 60 °C during startup at 60 °C during startup be at 60 °C during startup at 60 °C during sta	 at 230 V at inside-delta circuit at 40 °C rated value 	37 kW
Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] 10 %; Relative to set le power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage • at 50 Hz • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz	 at 400 V at 40 °C rated value 	37 kW
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [½] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during tartup • at 50		
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup stype of the motor protection Control circuit/ Control type of voltage of the control supply voltage at 50 Hz • at 60 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz		
relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage • at 50 Hz • at 60 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz		
minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 60 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz		
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage • at 50 Hz • at 60 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 M 23 W 23 W 20 W		
at 40 °C after startup at 50 °C after startup at 60 °C after startup eat 60 °C after startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 60 °C during startup at 60 °C during startup at 60 °C during startup at 60 °C during startup eat 60 °C during startup startup eat 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC eat 50 Hz at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 %		10 %; Relative to set le
at 50 °C after startup at 60 °C after startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup at 60 °C during startup by at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC at 50 Hz at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 % 10 % 10 % 10 % 10 % 10 %	• • •	
• at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control	·	
power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup 1 083 W 921 W stype of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 % 10 %	•	
 at 40 °C during startup at 50 °C during startup at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage at 50 Hz at 50 Hz at 60 Hz 110 250 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 	·	19 W
 at 50 °C during startup at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage at 50 Hz at 50 Hz at 60 Hz to 250 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 % 		
 at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage aC control supply voltage at AC at 50 Hz at 60 Hz 110 250 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 % 		
type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC o at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz AC at 50 Hz Electronic, tripping in the event of thermal overload of the motor AC -10 250 V -15 % -15 % -15 %		
type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz AC at 50 Hz 10 %		
type of voltage of the control supply voltage control supply voltage at AC at 50 Hz at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz		Electronic, tripping in the event of thermal overload of the motor
control supply voltage at AC • at 50 Hz • at 60 Hz 110 250 V • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 %		10
at 50 Hz at 60 Hz telative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 110 250 V -15 % 10 %		AC .
at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 110 250 V -15 % 10 %		440 0501/
relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz -15 % 10 %		
AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz 10 %		
AC at 50 Hz		-15 %
relative negative tolerance of the control supply voltage at -15 %		10 %
	relative negative tolerance of the control supply voltage at	-15 %

AC at 60 Hz	
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	100 mA
holding current in bypass operation rated value	180 mA
inrush current by closing the bypass contacts maximum	0.8 A
inrush current peak at application of control supply voltage maximum	43 A
duration of inrush current peak at application of control supply voltage	1.6 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
with fail-safe	1
parameterizable	4
number of digital outputs	3
Number of digital outputs with fail-safe	1
number of digital outputs parameterizable	2
 number of digital outputs not parameterizable 	1
digital output version	2 normally-open contacts (NO) / 1 normally-closed contact (NC) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Response times	
OFF-delay time with safety-related request when switched off via control inputs maximum	100 ms
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	306 mm
width	185 mm
depth	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	7.15 kg
Connections/ Terminals	
type of electrical connection	hov terminal
for main current circuit for control circuit	box terminal
	screw-type terminals
width of connection bar maximum	25 mm
wire length for thermistor connection	50 m
with conductor cross-section = 0.5 mm² maximum with conductor cross-section = 4.5 mm² maximum	50 m
with conductor cross-section = 1.5 mm² maximum	150 m
with conductor cross-section = 2.5 mm² maximum	250 m
for main contacts for box terminal using the front clamping point solid.	1x (2.5 16 mm²)
clamping point solid	
 for main contacts for box terminal using the front clamping point finely stranded with core end processing 	1x (2.5 50 mm²)

 for main contacts for box terminal using the front clamping point stranded 	1x (10 70 mm²)
for main contacts for box terminal using the back	1x (2.5 16 mm²)
clamping point solid	
 for AWG cables for main contacts for box terminal using the back clamping point 	1x (10 2/0)
 for main contacts for box terminal using both clamping points solid 	2x (2.5 16 mm²)
 for main contacts for box terminal using both clamping points finely stranded with core end processing 	2x (2.5 35 mm²)
 for main contacts for box terminal using both clamping points stranded 	2x (6 16 mm²), 2x (10 50 mm²)
 for main contacts for box terminal using the back clamping point finely stranded with core end processing 	1x (2.5 50 mm²)
 for main contacts for box terminal using the back clamping point stranded 	1x (10 70 mm²)
type of connectable conductor cross-sections	
 for control circuit solid 	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
 for control circuit finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
 for AWG cables for control circuit solid 	1x (20 12), 2x (20 14)
wire length	
between soft starter and motor maximum	800 m
at the digital inputs at DC maximum	1 000 m
tightening torque	
for main contacts with screw-type terminals	4.5 6 N·m
for auxiliary and control contacts with screw-type	0.8 1.2 N·m
terminals	
tightening torque [lbf·in]	
for main contacts with screw-type terminals	40 53 lbf·in
 for auxiliary and control contacts with screw-type 	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog
ambient temperature	
ambient temperature	
ampient temperatureduring operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
•	-25 +60 °C; Please observe derating at temperatures of 40 °C or above -40 +80 °C
during operation	· · · · · · · · · · · · · · · · · · ·
during operation during storage and transport	· · · · · · · · · · · · · · · · · · ·
during operation during storage and transport environmental category	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2
during operation during storage and transport environmental category during operation according to IEC 60721	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get
• during operation • during storage and transport environmental category • during operation according to IEC 60721 • during storage according to IEC 60721	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes
 during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according 	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes
 during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker — usable for Standard Faults at 460/480 V according to UL 	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes Yes Yes
 during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for Standard Faults at 460/480 V at inside- 	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes Yes Yes
 during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus RTU PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for Standard Faults at 460/480 V at insidedelta circuit according to UL — usable for High Faults at 460/480 V at insidedelta circuit according to UL 	-40 +80 °C 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes Yes Yes
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker _ usable for Standard Faults at 460/480 V according to UL _ usable for Standard Faults at 460/480 V at insidedelta circuit according to UL	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes Yes Yes
during operation during storage and transport environmental category during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 EMC emitted interference Communication/ Protocol communication module is supported PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS UL/CSA ratings manufacturer's article number of circuit breaker usable for Standard Faults at 460/480 V according to UL usable for Standard Faults at 460/480 V at insidedelta circuit according to UL usable for High Faults at 460/480 V at insidedelta circuit according to UL usable for High Faults at 460/480 V at insidedelta circuit according to UL usable for Standard Faults at 575/600 V according	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A, Class B on request Yes Yes Yes Yes Yes Yes Yes

delta circuit according to UL	
• of the fuse	
 usable for Standard Faults up to 575/600 V according to UL 	Type: Class RK5 / K5, max. 250 A; Iq = 10 kA
 usable for High Faults up to 575/600 V according to UL 	Type: Class J / L, max. 250 A; Iq = 100 kA
 usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL 	Type: Class RK5 / K5, max. 250 A; Iq = 10 kA
 usable for High Faults at inside-delta circuit up to 575/600 V according to UL 	Type: Class J / L, max. 250 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	20 hp
• at 220/230 V at 50 °C rated value	25 hp
• at 460/480 V at 50 °C rated value	50 hp
• at 200/208 V at inside-delta circuit at 50 °C rated value	30 hp
• at 220/230 V at inside-delta circuit at 50 °C rated value	40 hp
• at 460/480 V at inside-delta circuit at 50 °C rated value	75 hp
contact rating of auxiliary contacts according to UL	R300-B300
Safety related data	
safety device type according to IEC 61508-2	Туре В
B10d value	1 000 000
Safety Integrity Level (SIL)	
according to IEC 61508	SIL1
SIL Claim Limit (subsystem) according to EN 62061	SIL 1
performance level (PL) according to EN ISO 13849-1	С
category according to EN ISO 13849-1	2
stop category according to EN 60204-1	0
Safe failure fraction (SFF)	60 %
average diagnostic coverage level (DCavg)	90 %
diagnostics test interval by internal test function maximum	1 000 s
PFHD with high demand rate according to EN 62061	1E-6 1/h
PFDavg with low demand rate according to IEC 61508	0.09
hardware fault tolerance according to IEC 61508	0
T1 value for proof test interval or service life according to IEC 61508	20 a
safe state	Open load circuit
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
electromagnetic compatibility	acc. to IEC 60947-4-2
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
according to ATEX directive 2014/34/EU	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate according to EN 62061 relating to ATEX	5E-7 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a
Certificates/ approvals	
General Product Approval	

General Product Approval





Confirmation















Type Test Certificates/Test Report



Marine / Shipping

other







Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5526-1HF14

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RW5526-1HF14}\\$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5526-1HF14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5526-1HF14&lang=er

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5526-1HF14/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5526-1HF14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)


https://support.industry.siemens.com/cs/ww/en/view/101494917

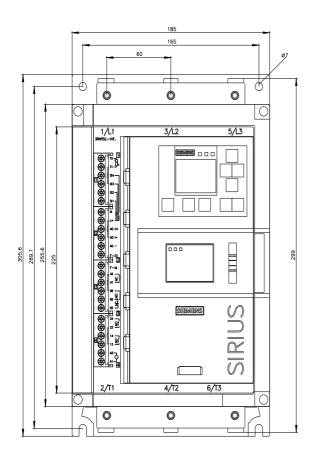

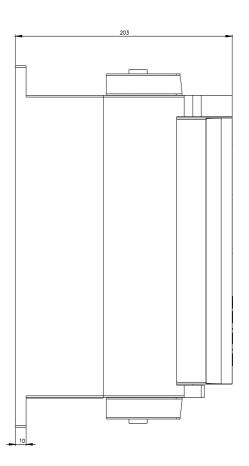

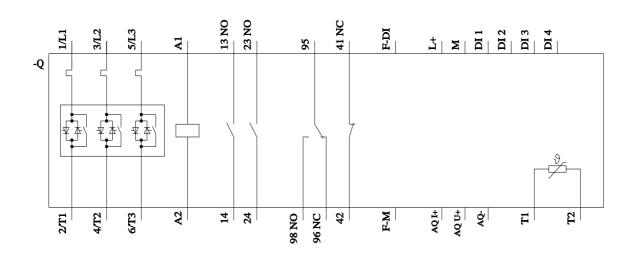

last modified: 4/30/2023 🖸

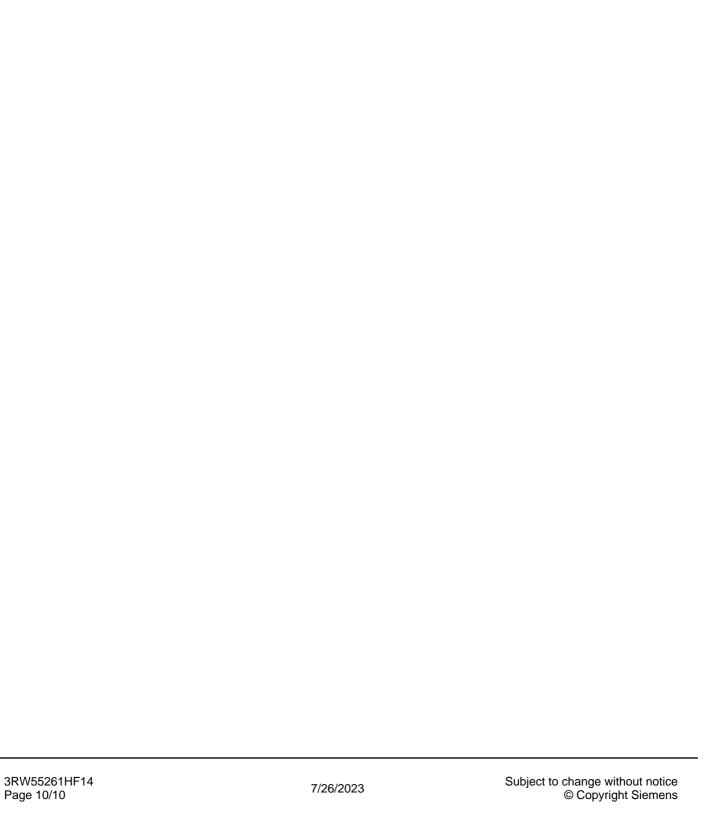

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RW55261HF14