# SIEMENS

## Data sheet

## 3RW5546-6HA06



SIRIUS soft starter 200-690 V 370 A, 24 V AC/DC Screw terminals

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
<ul> <li>of high feature HMI module usable</li> </ul>	<u>3RW5980-0HF00</u>
<ul> <li>of communication module PROFINET standard usable</li> </ul>	<u>3RW5980-0CS00</u>
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	<u>3RW5950-0CH00</u>
<ul> <li>of communication module PROFIBUS usable</li> </ul>	<u>3RW5980-0CP00</u>
<ul> <li>of communication module Modbus TCP usable</li> </ul>	<u>3RW5980-0CT00</u>
<ul> <li>of communication module Modbus RTU usable</li> </ul>	<u>3RW5980-0CR00</u>
<ul> <li>of communication module Ethernet/IP</li> </ul>	<u>3RW5980-0CE00</u>
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	<u>3NE1334-2; Type of coordination 2, Iq = 65 kA</u>
<ul> <li>of back up D fuse link for comisenductor protection</li> </ul>	2NE2240 8: Type of coordination 2, Id = 65 kA

 $\bullet$  of back-up R fuse link for semiconductor protection usable up to 690 V

3NE3340-8; Type of coordination 2, Iq = 65 kA

#### General technical data

General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes

is supported HMI-High Feature	Yes			
product feature integrated bypass contact system	Yes			
number of controlled phases	3			
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2			
current unbalance limiting value [%]	10 60 %			
ground-fault monitoring limiting value [%]	10 95 %			
buffering time in the event of power failure				
• for main current circuit	100 ms			
for control circuit	100 ms			
idle time adjustable	0 255 s			
insulation voltage rated value	690 V			
degree of pollution	3, acc. to IEC 60947-4-2			
impulse voltage rated value	8 kV 1 800 V			
blocking voltage of the thyristor maximum service factor	1.15			
	8 kV			
surge voltage resistance rated value maximum permissible voltage for protective separation	O KV			
	600 V: door not apply for thermistor connection			
between main and auxiliary circuit     shock resistance	690 V; does not apply for thermistor connection			
vibration resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting 15 mm up to 6 Hz; 2 g up to 500 Hz			
recovery time after overload trip adjustable	60 1 800 s			
utilization category according to IEC 60947-4-2				
reference code according to IEC 81346-2	AC 53a Q			
Substance Prohibitance (Date)	02/15/2018			
product function	02/13/2010			
ramp-up (soft starting)	Yes			
• ramp-down (soft stop)	Yes			
breakaway pulse	Yes			
adjustable current limitation	Yes			
creep speed in both directions of rotation	Yes			
• pump ramp down	Yes			
• DC braking	Yes			
motor heating	Yes			
slave pointer function	Yes			
trace function	Yes			
intrinsic device protection	Yes			
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)			
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick			
• inside-delta circuit	Yes; Only up to 600 V operating voltage			
auto-RESET	Yes			
manual RESET	Yes			
remote reset	Yes			
communication function	Yes			
<ul> <li>operating measured value display</li> </ul>	Yes			
event list	Yes			
error logbook	Yes			
<ul> <li>via software parameterizable</li> </ul>	Yes			
<ul> <li>via software configurable</li> </ul>	Yes			
screw terminal	Yes			
<ul> <li>spring-loaded terminal</li> </ul>	No			
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules			
firmware update	Yes			
<ul> <li>removable terminal for control circuit</li> </ul>	Yes			
<ul> <li>voltage ramp</li> </ul>	Yes			
torque control	Yes			
combined braking	Yes			
<ul> <li>analog output</li> </ul>	Yes; 4 20 mA (default) / 0 10 V			
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes			
<ul> <li>condition monitoring</li> </ul>	Yes			

<ul> <li>automatic parameterisation</li> </ul>	Yes			
<ul> <li>application wizards</li> </ul>	Yes			
<ul> <li>alternative run-down</li> </ul>	Yes			
<ul> <li>emergency operation mode</li> </ul>	Yes			
<ul> <li>reversing operation</li> </ul>	Yes			
<ul> <li>soft starting at heavy starting conditions</li> </ul>	Yes			
Power Electronics				
operational current				
• at 40 °C rated value	370 A			
<ul> <li>at 40 °C rated value minimum</li> </ul>	74 A			
• at 50 °C rated value	328 A			
• at 60 °C rated value	300 A			
operational current at inside-delta circuit				
• at 40 °C rated value	641 A			
• at 50 °C rated value	568 A			
• at 60 °C rated value	519 A			
operating voltage				
rated value	200 690 V			
• at inside-delta circuit rated value	200 600 V			
relative negative tolerance of the operating voltage	-15 %			
relative positive tolerance of the operating voltage	10 %			
relative negative tolerance of the operating voltage at	-15 %			
inside-delta circuit				
relative positive tolerance of the operating voltage at inside-delta circuit	10 %			
operating power for 3-phase motors				
at 230 V at 40 °C rated value	110 kW			
<ul> <li>at 230 V at 40°C rated value</li> <li>at 230 V at inside-delta circuit at 40 °C rated value</li> </ul>				
• at 250 v at inside-dena circuit at 40 °C rated value • at 400 V at 40 °C rated value	200 kW			
<ul> <li>at 400 V at 40°C rated value</li> <li>at 400 V at inside-delta circuit at 40 °C rated value</li> </ul>	200 kW 355 kW			
at 500 V at 40 °C rated value				
	250 kW			
• at 500 V at inside-delta circuit at 40 °C rated value	450 kW			
at 690 V at 40 °C rated value	355 kW 50 Hz			
Operating frequency 1 rated value	60 Hz			
Operating frequency 2 rated value relative negative tolerance of the operating frequency	-10 %			
	10 %			
relative positive tolerance of the operating frequency	10 %; Relative to set le			
minimum load [%]	10 %, Relative to set le			
power loss [W] for rated value of the current at AC • at 40 °C after startup	111 W			
·				
• at 50 °C after startup	98 W			
• at 60 °C after startup	90 W			
power loss [W] at AC at current limitation 350 %	E E62 W			
• at 40 °C during startup	5 563 W			
<ul> <li>at 50 °C during startup</li> </ul>	4 694 W			
• at 60 °C during startup	4 145 W			
at 60 °C during startup  type of the motor protection	4 145 W Electronic, tripping in the event of thermal overload of the motor			
at 60 °C during startup  type of the motor protection  Control circuit/ Control	Electronic, tripping in the event of thermal overload of the motor			
at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage				
at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC	Electronic, tripping in the event of thermal overload of the motor AC/DC			
at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC     at 50 Hz rated value	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V			
at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage at AC      at 50 Hz rated value      at 60 Hz rated value	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V			
at 60 °C during startup      type of the motor protection      Control circuit/ Control      type of voltage of the control supply voltage      control supply voltage at AC          • at 50 Hz rated value          relative negative tolerance of the control supply voltage at         AC at 50 Hz	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V -20 %			
• at 60 °C during startup      type of the motor protection      Control circuit/ Control      type of voltage of the control supply voltage      control supply voltage at AC          • at 50 Hz rated value          relative negative tolerance of the control supply voltage at         AC at 50 Hz      relative positive tolerance of the control supply voltage at         AC at 50 Hz	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V -20 % 20 %			
at 60 °C during startup      type of the motor protection      Control circuit/ Control      type of voltage of the control supply voltage      control supply voltage at AC          • at 50 Hz rated value          • at 60 Hz rated value      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 60 Hz	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V -20 % 20 % -20 %			
• at 60 °C during startup      type of the motor protection      Control circuit/ Control      type of voltage of the control supply voltage      control supply voltage at AC          • at 50 Hz rated value          • at 60 Hz rated value      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at     AC at 60 Hz	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V -20 % 20 % -20 % 20 % 20 %			
at 60 °C during startup      type of the motor protection      Control circuit/ Control      type of voltage of the control supply voltage      control supply voltage at AC          • at 50 Hz rated value          • at 60 Hz rated value      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V -20 % 20 % -20 %			
• at 60 °C during startup      type of the motor protection      Control circuit/ Control      type of voltage of the control supply voltage      control supply voltage at AC          • at 50 Hz rated value          • at 60 Hz rated value      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 50 Hz      relative negative tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at     AC at 60 Hz      relative positive tolerance of the control supply voltage at     AC at 60 Hz	Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V -20 % 20 % -20 % 20 % 20 %			

	10.1/			
relative positive tolerance of the control supply voltage frequency	10 %			
control supply voltage				
at DC rated value	24 V			
relative negative tolerance of the control supply voltage at	-20 %			
DC	20 /0			
relative positive tolerance of the control supply voltage at DC	20 %			
control supply current in standby mode rated value	440 mA			
holding current in bypass operation rated value	720 mA			
inrush current by closing the bypass contacts maximum	6.7 A			
inrush current peak at application of control supply voltage maximum	7.5 A			
duration of inrush current peak at application of control supply voltage	20 ms			
design of the overvoltage protection	Varistor			
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply			
Inputs/ Outputs				
number of digital inputs	4			
parameterizable	4			
<ul> <li>number of digital outputs</li> </ul>	4			
<ul> <li>number of digital outputs parameterizable</li> </ul>	3			
<ul> <li>number of digital outputs not parameterizable</li> </ul>	1			
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)			
number of analog outputs	1			
switching capacity current of the relay outputs				
<ul> <li>at AC-15 at 250 V rated value</li> </ul>	3 A			
• at DC-13 at 24 V rated value	1 A			
Installation/ mounting/ dimensions				
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)			
fastening method	screw fixing			
height	393 mm			
width	210 mm			
depth	203 mm			
required spacing with side-by-side mounting				
• forwards	10 mm			
backwards	0 mm			
• upwards	100 mm			
downwards	75 mm			
• at the side	5 mm			
weight without packaging	10.9 kg			
Connections/ Terminals				
type of electrical connection				
for main current circuit	busbar connection			
for control circuit	screw-type terminals			
width of connection bar maximum	45 mm			
wire length for thermistor connection				
<ul> <li>with conductor cross-section = 0.5 mm<sup>2</sup> maximum</li> </ul>	50 m			
<ul> <li>with conductor cross-section = 1.5 mm<sup>2</sup> maximum</li> </ul>	150 m			
<ul> <li>with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>	250 m			
type of connectable conductor cross-sections				
<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	2x (50 240 mm²)			
<ul> <li>for DIN cable lug for main contacts finely stranded</li> </ul>	2x (70 240 mm <sup>2</sup> )			
type of connectable conductor cross-sections				
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)			
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.5 mm <sup>2</sup> )			
for AWG cables for control circuit solid	1x (20 12), 2x (20 14)			
wire length				
between soft starter and motor maximum	800 m			
<ul> <li>at the digital inputs at DC maximum</li> </ul>	1 000 m			

tightening torque				
<ul> <li>for main contacts with screw-type terminals</li> </ul>	14 24 N·m			
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	0.8 1.2 N·m			
terminals				
tightening torque [lbf·in]				
for main contacts with screw-type terminals	124 210 lbf in			
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	7 10.3 lbf-in			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog			
ambient temperature				
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above			
during storage and transport	-40 +80 °C			
environmental category				
<ul> <li>during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2			
	(sand must not get into the devices), 3M6			
<ul> <li>during storage according to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get			
	inside the devices), 1M4			
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)			
EMC emitted interference	acc. to IEC 60947-4-2: Class A			
Communication/ Protocol				
communication module is supported	Van			
PROFINET standard	Yes			
PROFINET high-feature     EtherNet///P	Yes			
EtherNet/IP	Yes			
Modbus RTU	Yes			
Modbus TCP	Yes			
PROFIBUS	Yes			
UL/CSA ratings manufacturer's article number				
of the fuse				
<ul> <li>usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1200 A; lq = 18 kA			
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 1200 A; Iq = 100 kA			
<ul> <li>— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1200 A; lq = 18 kA			
<ul> <li>— usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1200 A; Iq = 100 kA			
operating power [hp] for 3-phase motors				
<ul> <li>at 200/208 V at 50 °C rated value</li> </ul>	100 hp			
<ul> <li>at 220/230 V at 50 °C rated value</li> </ul>	125 hp			
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>	250 hp			
• at 575/600 V at 50 °C rated value	300 hp			
• at 200/208 V at inside-delta circuit at 50 °C rated value	200 hp			
<ul> <li>at 220/230 V at inside-delta circuit at 50 °C rated value</li> </ul>	200 hp			
• at 460/480 V at inside-delta circuit at 50 °C rated value	450 hp			
• at 575/600 V at inside-delta circuit at 50 °C rated value	600 hp			
contact rating of auxiliary contacts according to UL	R300-B300			
Safety related data				
protection class IP on the front according to IEC 60529	IP00; IP20 with cover			
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover			
electromagnetic compatibility	acc. to IEC 60947-4-2			
ATEX				
certificate of suitability				
• ATEX	Yes			
• IECEx	Yes			
<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X			
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]			
hardware fault tolerance according to IEC 61508 relating to ATEX	0			
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008			

PFHD with high demand i to ATEX	rate according to El	N 62061 relating	5E-7	1/h		
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX		SIL1				
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX		3 a				
Certificates/ approvals						
General Product Approva	al					EMC
SP M		<u>Confirmatic</u>	n		EHC	RCM
For use in hazardous loc	ations	Declaration of formity	Con-	Test Certificates	Marine / Shipping	
X ATEX	IECEX	CE EG-Konf.		Type Test Certific- ates/Test Report	ABS	BUREAU VERITAS
Marine / Shipping		other				
Llovds Register us	PRS	<u>Confirmatic</u>	'n			

#### Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5546-6HA06

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5546-6HA06

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5546-6HA06

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5546-6HA06&lang=en

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5546-6HA06/char


Characteristic: Installation altitude

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5546-6HA06&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

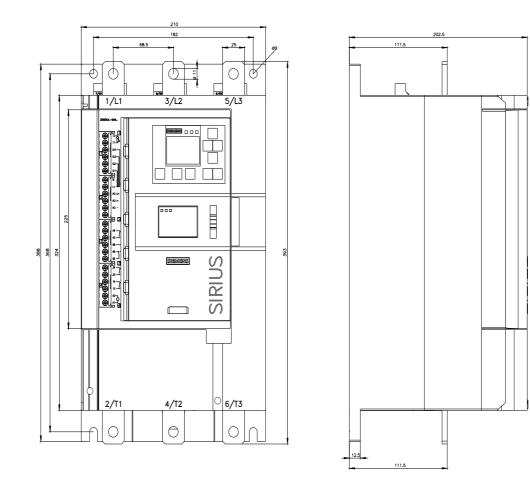

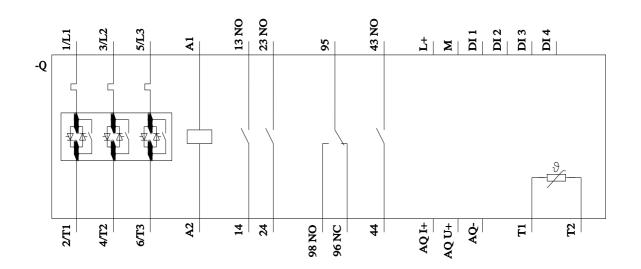

5/1/2023 🖸

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3RW55466HA06