SIEMENS

Data sheet

3TC4817-0BF0



Contactor, Size 4, 2-pole, DC-3 and 5, 75 A Auxiliary switch 22 (2 NO + 2 NC) 110V AC 50Hz/132V AC 60Hz AC operation

product designation	Contactor
product type designation	3TC
General technical data	
size of contactor	4
product extension	
 function module for communication 	No
 auxiliary switch 	Yes
insulation voltage rated value	800 V
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	300 V
shock resistance at rectangular impulse	
• at AC	10g / 5 ms, 5g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
ambient temperature	
during operation	-25 +55 °C
during storage	-50 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles	2
number of poles for main current circuit	2
number of NO contacts for main contacts	2
number of NC contacts for main contacts	0
type of voltage	DC
operational current	
 at 1 current path at DC-1 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
— at 440 V rated value	75 A
— at 600 V rated value	75 A

— at 750 V rated value	75 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
— at 440 V rated value	75 A
— at 600 V rated value	75 A
— at 750 V rated value	75 A
operating power	
● at DC-1	
— at 110 V rated value	8.2 kW
— at 220 V rated value	16.5 kW
— at 440 V rated value	33 kW
— at 750 V rated value	56 kW
• at DC-3 at DC-5	
— at 110 V rated value	6.5 kW
— at 220 V rated value	13 kW
— at 440 V rated value	27 kW
— at 600 V rated value	38 kW
— at 750 V rated value	45 kW
operating frequency	
● at DC-1 maximum	1 000 1/h
● at DC-3 maximum	600 1/h
● at DC-5 maximum	600 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	110 V
at 60 Hz rated value	132 V
operating range factor control supply voltage rated value of	132 V
	132 V 0.8 1.1
operating range factor control supply voltage rated value of magnet coil at AC	
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz	0.8 1.1
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC	0.8 1.1 300 VA
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz	0.8 1.1 300 VA 300 VA
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil	0.8 1.1 300 VA 300 VA 365 VA 0.5
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 50 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz at 60 Hz • at 50 Hz • at 60 Hz at 60 Hz • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz action Hz • at 60 Hz	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz at 60 Hz acting time Auxiliary circuit number of NC contacts for auxiliary contacts	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts	0.8 1.1 300 VA 300 VA 305 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 2 2 2 2 2 2 2 2
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts identification number and letter for switching elements	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 2 2 2 2 2
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts operational current at AC-12 maximum	0.8 1.1 300 VA 300 VA 305 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 2 3 5.6 A
operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts	0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 2 2 10 A

operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	10 A
• at 60 V rated value	10 A
• at 110 V rated value	3.2 A
• at 125 V rated value	2.5 A
 at 220 V rated value 	0.9 A
 at 600 V rated value 	0.22 A
operational current at DC-13	
 at 24 V rated value 	10 A
• at 48 V rated value	5 A
• at 60 V rated value	5 A
• at 110 V rated value	1.14 A
• at 125 V rated value	0.98 A
at 220 V rated value	0.48 A
• at 600 V rated value	0.07 A
UL/CSA ratings	
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	
— with type of coordination 1 required	2 x 3NA31 (160 A) in series (750 V, 5 kA)
— with type of assignment 2 required	2 x 3NA31 (63 A) in series (750 V, 5 kA)
 for short-circuit protection of the auxiliary switch required 	gG: 16 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward
mounting position	and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal
	mounting surface
fastening method	screw fixing
 side-by-side mounting 	Yes
height	177.5 mm
width	100 mm
depth	156 mm
required spacing	
 with side-by-side mounting 	
— forwards	20 mm
— backwards	0 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
 for grounded parts 	
— forwards	55 mm
— backwards	0 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
 for live parts 	
— forwards	55 mm
— backwards	0 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	screw-type terminals
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
for auxiliary contacts	
solid or stranded	2x (1 2.5 mm²)
 — solid of stranded — finely stranded with core end processing 	
Safety related data	2x (0.75 1.5 mm²)

product function mirror of	contact according to IEC 60	947-4-1 Yes	;			
protection class IP on the front according to IEC 60529			IP00; IP20 with box terminal/cover			
touch protection on the front according to IEC 60529			finger-safe, for vertical contact from the front with cover			
Certificates/ approvals						
General Product Appr	roval				Functional Safety/Safety of Ma- chinery	
SP		<u>Confirmation</u>	FRS UR	EAC	<u>Type Examination Cer-</u> tificate	
Functional Safety/Safety of Ma- chinery	Declaration of Conform	iity	Test Certificates			
<u>Type Examination Cer-</u> tificate	UK CA	CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	Miscellaneous	<u>Type Test Certific-</u> ates/Test Report	
other	Dangerous Good					
Confirmation	Transport Information					

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC4817-0BF0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC4817-0BF0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0BF0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC4817-0BF0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0BF0/char Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC4817-0BF0&objecttype=14&gridview=view1

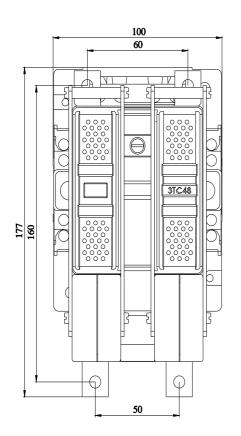

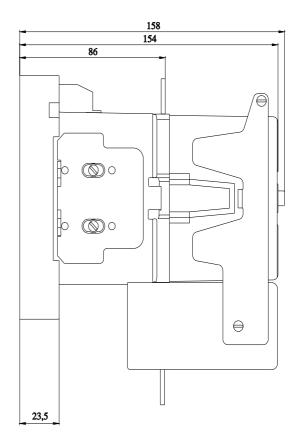

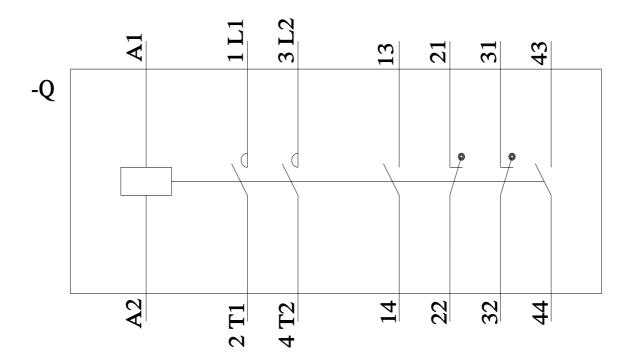

2/13/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3TC48170BF0