SIEMENS

Data sheet

3TC4817-0BN1



Contactor, Size 4, 2-pole, DC-3 and 5, 75 A Auxiliary switch 22 (2 NO + 2 NC) 220 V AC 60 Hz/183 V AC 50 Hz AC operation

product designation	Contactor	
product type designation	3TC	
General technical data		
size of contactor	4	
product extension		
 function module for communication 	No	
auxiliary switch	Yes	
insulation voltage rated value	800 V	
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	300 V	
shock resistance at rectangular impulse		
• at AC	10g / 5 ms, 5g / 10 ms	
mechanical service life (operating cycles)		
 of contactor typical 	10 000 000	
 of the contactor with added auxiliary switch block typical 	10 000 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	03/01/2017	
Ambient conditions		
ambient temperature		
 during operation 	-25 +55 °C	
during storage	-50 +80 °C	
relative humidity minimum	10 %	
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %	
Main circuit		
number of poles	2	
number of poles for main current circuit	2	
number of NO contacts for main contacts	2	
number of NC contacts for main contacts	0	
type of voltage	DC	
operational current		
 at 1 current path at DC-1 		
— at 24 V rated value	75 A	
— at 110 V rated value	75 A	
— at 220 V rated value	75 A	
 with 2 current paths in series at DC-1 		
— at 24 V rated value	75 A	
— at 110 V rated value	75 A	
— at 220 V rated value	75 A	
— at 440 V rated value	75 A	
— at 600 V rated value	75 A	

— at 750 V rated value	75 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	75 A
— at 110 V rated value	75 A
— at 220 V rated value	75 A
— at 440 V rated value	75 A
— at 600 V rated value	75 A
— at 750 V rated value	75 A
operating power	
• at DC-1	
— at 110 V rated value	8.2 kW
— at 220 V rated value	16.5 kW
— at 440 V rated value	33 kW
— at 750 V rated value	56 kW
• at DC-3 at DC-5	
— at 110 V rated value	6.5 kW
— at 220 V rated value	13 kW
— at 440 V rated value	27 kW
— at 600 V rated value	38 kW
— at 750 V rated value	45 kW
operating frequency	4 000 4//
• at DC-1 maximum	1 000 1/h
• at DC-3 maximum	600 1/h
at DC-5 maximum	600 1/h
Control circuit/ Control	
tune of voltage of the control complexity it	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	183 V
 control supply voltage at AC at 50 Hz rated value at 60 Hz rated value 	
• at 50 Hz rated value	183 V
 control supply voltage at AC at 50 Hz rated value at 60 Hz rated value operating range factor control supply voltage rated value of 	183 V
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC	183 V 220 V
 control supply voltage at AC at 50 Hz rated value at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC at 60 Hz 	183 V 220 V 0.8 1.1
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC	183 V 220 V 0.8 1.1 300 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz	183 V 220 V 0.8 1.1 300 VA 300 VA
 control supply voltage at AC at 50 Hz rated value at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC at 60 Hz apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz 	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5
 control supply voltage at AC at 50 Hz rated value at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC at 60 Hz apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil at 50 Hz 	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA
 control supply voltage at AC at 50 Hz rated value at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC at 60 Hz apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil at 50 Hz at 60 Hz at 60 Hz apparent holding power of magnet coil at AC at 50 Hz at 50 Hz at 60 Hz 	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA 26 VA
 control supply voltage at AC at 50 Hz rated value at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC at 60 Hz apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz inductive power factor with closing power of the coil at 50 Hz at 60 Hz at 60 Hz apparent holding power of magnet coil at AC at 50 Hz at 50 Hz at 60 Hz 	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA 26 VA 26 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz inductive power factor with closing power of the coil • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz at 60 Hz • at 60 Hz	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz at 60 Hz • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts	183 V 220 V 0.8 1.1 300 VA 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz at 60 Hz •	183 V 220 V 0.8 1.1 300 VA 300 VA 300 VA 365 VA 0.5 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact instantaneous contact	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz at 60 Hz at 60 Hz • at 60 Hz <td>183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 0</td>	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 0
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts identification number and let	183 V 220 V 0.8 1.1 300 VA 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 2 2 2 2
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts identification	183 V 220 V 0.8 1.1 300 VA 300 VA 365 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 0.24 0.24 0.24 0.26 20 30 ms 2 2 2 2 0
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the nolding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary con	183 V 220 V 0.8 1.1 300 VA 300 VA 305 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 10 A
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 60 Hz inductive power factor with closing power of the coil • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary contacts • instantaneous contact number of NO contacts for auxiliary contacts • instantaneous contact number of CO contacts for auxiliary contacts	183 V 220 V 0.8 1.1 300 VA 300 VA 305 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 10 A 5.6 A
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value operating range factor control supply voltage rated value of magnet coil at AC • at 60 Hz apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the nolding power of the coil • at 60 Hz arcing time Auxiliary circuit number of NC contacts for auxiliary con	183 V 220 V 0.8 1.1 300 VA 300 VA 305 VA 0.5 0.5 0.45 26 VA 26 VA 26 VA 35 VA 0.24 0.24 0.26 20 30 ms 2 2 2 2 2 2 10 A

operational current at DC-12	
at 24 V rated value	10 A
• at 48 V rated value	10 A
• at 60 V rated value	10 A
 at 110 V rated value 	3.2 A
 at 125 V rated value 	2.5 A
 at 220 V rated value 	0.9 A
 at 600 V rated value 	0.22 A
operational current at DC-13	
• at 24 V rated value	10 A
 at 48 V rated value 	5 A
• at 60 V rated value	5 A
• at 110 V rated value	1.14 A
• at 125 V rated value	0.98 A
 at 220 V rated value 	0.48 A
• at 600 V rated value	0.07 A
UL/CSA ratings	
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the fuse link	
for short-circuit protection of the main circuit	
- with type of coordination 1 required	2 x 3NA31 (160 A) in series (750 V, 5 kA)
— with type of assignment 2 required	2 x 3NA31 (63 A) in series (750 V, 5 kA)
 for short-circuit protection of the auxiliary switch required 	gG: 16 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-22,5° rotation possible on vertical mounting surface; can be tilted forward
mounting position	and backward by +/- 22.5° on vertical mounting surface; standing, on horizontal
	mounting surface
fastening method	screw fixing
 side-by-side mounting 	Yes
height	177.5 mm
width	100 mm
depth	156 mm
required spacing	
 with side-by-side mounting 	
— forwards	20 mm
— backwards	0 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
 for grounded parts 	
— forwards	55 mm
— backwards	0 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	55 mm
— backwards	0 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	screw-type terminals
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
for auxiliary contacts	
- solid or stranded	2x (1 2.5 mm²)
 — solid of stranded — finely stranded with core end processing 	2x (1 2.5 mm ²)
Safety related data	

product function mirror of	contact according to IEC 60947	'-4-1 Yes			
protection class IP on the front according to IEC 60529); IP20 with box terminal/cov	er	
touch protection on th	ch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front with cover			r	
Certificates/ approvals					
General Product Appr	roval				Functional Safety/Safety of Ma- chinery
(SP)	<u>Confirmation</u>			EHC	<u>Type Examination Cer-</u> tificate
Functional Safety/Safety of Ma- chinery	Declaration of Conformity		Test Certificates		
Type Examination Cer- tificate	CE EG-Konf.	UK CA	Special Test Certific- ate	<u>Miscellaneous</u>	<u>Type Test Certific-</u> ates/Test Report
other	Dangerous Good				
Confirmation	Transport Information				

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TC4817-0BN1

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TC4817-0BN1

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0BN1


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TC4817-0BN1&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3TC4817-0BN1/char Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TC4817-0BN1&objecttype=14&gridview=view1

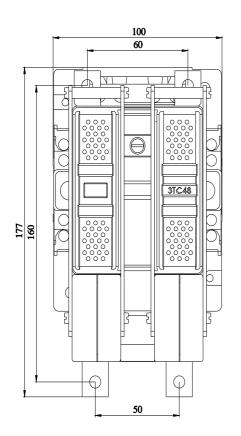

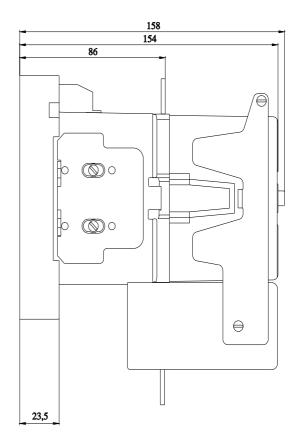

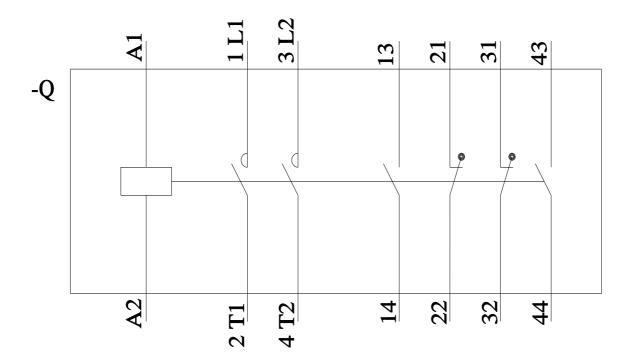

2/13/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3TC48170BN1