## 3VA1112-4EE42-0AA0

**Data sheet** 



circuit breaker 3VA1 IEC frame 160 breaking capacity class S Icu=36kA @ 415V 4-pole, line protection TM220, ATFM, In=125A overload protection Ir=88A...125A short-circuit protection Ii=10 x In N conductor unprotected nut keeper kit

| Model  |                             |
|--|-----------------------------|
| product brand name   | SENTRON                     |
| product designation  | Molded case circuit breaker |
| design of the product  | Line protection             |
| design of the overcurrent release  | TM220                       |
| protection function of the overcurrent release   | Ц                           |
| number of poles  | 4                           |
| General technical data   |                             |
| insulation voltage / rated value   | 800 V                       |
| operating voltage / at DC / rated value  | 600 V                       |
| operating voltage / at AC / rated value  | 690 V                       |
| power loss [W] / maximum   | 28.1 W                      |
| mechanical service life (operating cycles) / typical   | 20 000                      |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V                                       | 9 000                       |
| electrical endurance (operating cycles) / at AC-1 / at 690 V   | 6 300                       |
| product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof | No                          |
| ground-fault monitoring version  | Without                     |
| product function   |                             |
| <ul> <li>communication function</li> </ul>   | No                          |
| <ul> <li>other measurement function</li> </ul>   | No                          |
| Net Weight   | 1.249 kg                    |
| Current  |                             |
| operational current  |                             |
| • at 40 °C   | 125 A                       |
| ● at 45 °C   | 125 A                       |
| • at 50 °C   | 125 A                       |
| ● at 55 °C   | 122 A                       |
| • at 60 °C   | 120 A                       |
| • at 65 °C   | 117 A                       |
| • at 70 °C   | 114 A                       |
| Switching capacity according to IEC 60947  |                             |
| switching capacity class of the circuit breaker  | S                           |
| maximum short-circuit current breaking capacity (lcu)  |                             |
| • at 240 V   | 55 kA                       |
| • at 415 V   | 36 kA                       |
| • at 440 V   | 25 kA                       |
| • at 500 V   | 7 kA                        |
| • at 690 V   | 7 kA                        |
| operating short-circuit current breaking capacity (lcs)  |                             |

| • at 240 V  | 55 kA  |
|---|--|
| ● at 415 V  | 36 kA  |
| ● at 440 V  | 25 kA  |
| ● at 500 V  | 5 kA   |
| • at 690 V  | 5 kA   |
| short-circuit current making capacity (Icm)   |  |
| ● at 240 V  | 121 kA   |
| ● at 415 V  | 75.6 kA  |
| ● at 440 V  | 52.5 kA  |
| ● at 500 V  | 11.9 kA  |
| ● at 690 V  | 11.9 kA  |
| design of short-circuit protection  | For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter |
| Adjustable parameters   |  |
| product feature / for L-tripping / can be switched on/off   | No   |
| adjustable response value setting current (Ir) / of the L-trip / with   |  |
| I2t characteristic  |  |
| • minimum   | 88 A   |
| • maximum   | 125 A  |
| adjustable response value delay time (tr) / for L-tripping / with I2t characteristic  |  |
| • minimum   | 1 s  |
| • maximum   | 1 s  |
| adjustable response value setting current (li) / for I-tripping   | 4050 A   |
| • minimum   | 1 250 A  |
| • maximum   | 1 250 A  |
| adjustable setting current (InN) / for N-tripping   |  |
| • minimum   | 0 A  |
| • maximum   | 0 A  |
| design of the N-conductor protection  | without  |
| product function / grounding protection   | No   |
| Machanical Design   |  |
| Mechanical Design   |  |
| product component   | Na   |
| product component  • undervoltage release   | No<br>No   |
| product component  • undervoltage release  • voltage trigger  | No   |
| product component   | No<br>No   |
| product component   | No<br>No<br>5.12 in  |
| product component   | No<br>No<br>5.12 in<br>130 mm  |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]   | No No 5.12 in 130 mm 4 in  |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]   | No No 5.12 in 130 mm 4 in 101.6 mm   |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in   |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth   | No No 5.12 in 130 mm 4 in 101.6 mm   |
| product component  • undervoltage release  • voltage trigger  • trip indicator height [in] height width [in] width depth [in] depth Connections   | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm   |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit   | No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm   |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit   | No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends   |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  | No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm   |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum   | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)   | No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver                                    |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit   | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin                               |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver                                    |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts   | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin                               |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts  Accessories  | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver Tin                                |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts  Accessories  product extension / optional / motor drive  | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver Tin                                |
| product component  • undervoltage release  • voltage trigger  • trip indicator  height [in]  height  width [in]  width  depth [connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts  Accessories  product extension / optional / motor drive  Environmental conditions  | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin                               |
| product component  undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit number of CO contacts / for auxiliary contacts  Accessories product extension / optional / motor drive  Environmental conditions protection class IP / on the front                     | No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin                               |
| product component  undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit number of CO contacts / for auxiliary contacts  Accessories product extension / optional / motor drive  Environmental conditions protection class IP / on the front ambient temperature | No   |

• during storage / minimum

-40 °C 80 °C

during storage / maximum

ertificates

reference code / according to IEC 81346-2

Q

## **General Product Approval**

Confirmation





**Miscellaneous** 

<u>KC</u>



**EMC** 

**Declaration of Conformity** 

**Test Certificates** 







**Miscellaneous** 

Type Test Certificates/Test Report

Special Test Certificate

Marine / Shipping







CCS / China Classification Society

**Miscellaneous** 

other

other

Environment

Confirmation

**Miscellaneous** 

Environmental Confirmations

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1112-4EE42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1112-4EE42-0AA0

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$ 


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA1112-4EE42-0AA0


**CAx-Online-Generator** 

http://www.siemens.com/cax


**Tender specifications** 

http://www.siemens.com/specifications

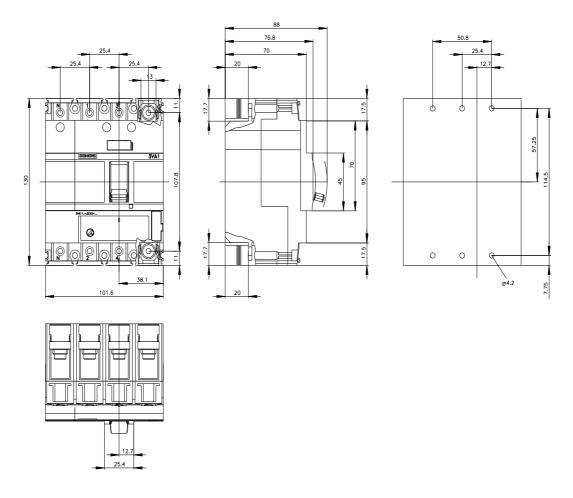

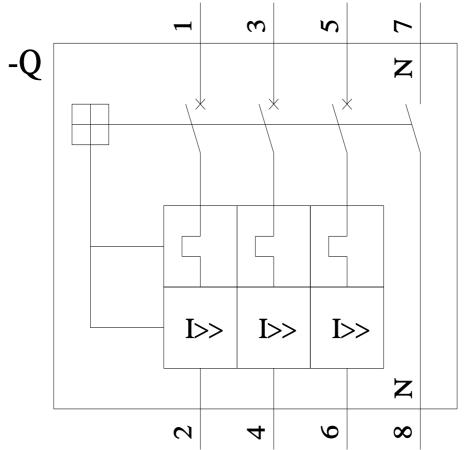

last modified: 8/10/2023 🖸

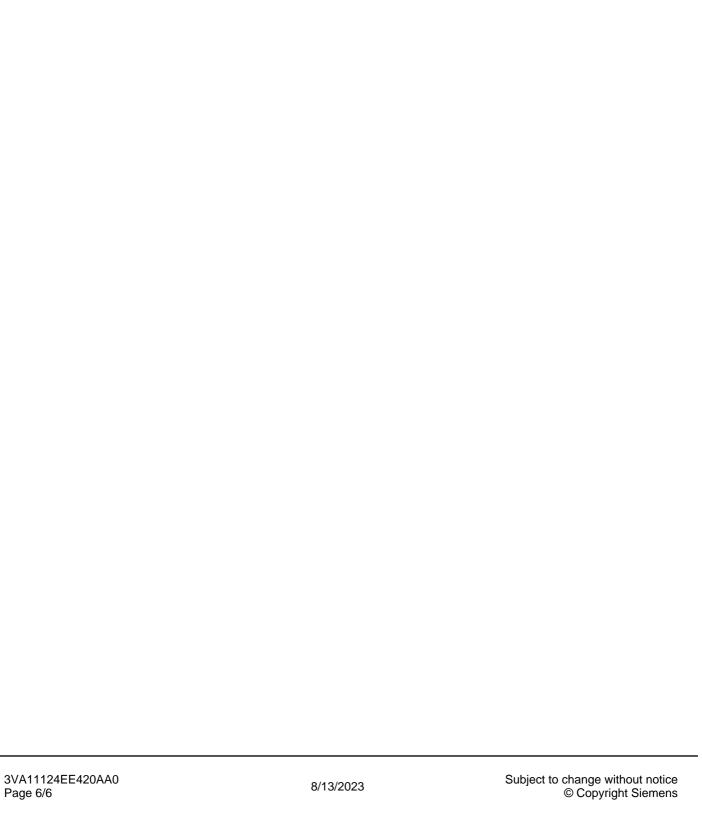

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3VA11124EE420AA0