SIEMENS

Data sheet


3VA1140-3EE42-0AA0



circuit breaker 3VA1 IEC frame 160 breaking capacity class N lcu=25kA @ 415V 4-pole, line protection TM220, ATFM, In=40A overload protection Ir=28A...40A short-circuit protection Ii=10 x In N conductor unprotected nut keeper kit

Model		
product brand name	SENTRON	
product designation	Molded case circuit breaker	
design of the product	Line protection	
design of the overcurrent release	TM220	
protection function of the overcurrent release	LI	
number of poles	4	
General technical data		
insulation voltage / rated value	800 V	
operating voltage / at DC / rated value	600 V	
operating voltage / at AC / rated value	690 V	
power loss [W] / maximum	10.8 W	
mechanical service life (operating cycles) / typical	20 000	
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000	
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300	
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No	
ground-fault monitoring version	Without	
product function		
 communication function 	No	
 other measurement function 	No	
Net Weight	1.182 kg	
Current		
operational current		
● at 40 °C	40 A	
● at 45 °C	40 A	
● at 50 °C	40 A	
● at 55 °C	39 A	
● at 60 °C	39 A	
● at 65 °C	38 A	
● at 70 °C	37 A	
Switching capacity according to IEC 60947		
switching capacity class of the circuit breaker	Ν	
maximum short-circuit current breaking capacity (lcu)		
• at 240 V	36 kA	
• at 415 V	25 kA	
• at 440 V	16 kA	
• at 500 V	7 kA	
• at 690 V	7 kA	
operating short-circuit current breaking capacity (lcs)		

a at 240 \/	26 kA
• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
• at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	75.6 kA
• at 415 V	52.5 kA
• at 440 V	32 kA
• at 500 V	11.9 kA
• at 690 V	11.9 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with	
I2t characteristic	
• minimum	28 A
• maximum	40 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1 s
• maximum	1 s
adjustable response value setting current (li) / for I-tripping	
• minimum	400 A
• maximum	400 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
design of the N-conductor protection	without
product function / grounding protection	No
Mechanical Design	
Mechanical Design product component	
	No
product component	No No
product component undervoltage release 	
product component undervoltage release voltage trigger 	No
product component • undervoltage release • voltage trigger • trip indicator	No No
product component • undervoltage release • voltage trigger • trip indicator height [in]	No No 5.12 in
product component undervoltage release voltage trigger trip indicator height [in] height 	No No 5.12 in 130 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in]	No No 5.12 in 130 mm 4 in
product component undervoltage release voltage trigger trip indicator height [in] height width [in] width 	No No 5.12 in 130 mm 4 in 101.6 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in]	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
product component undervoltage release voltage trigger trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar type of connectable conductor cross-sections / for flat-bar	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin Ves
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin Ves IP40
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin Ves

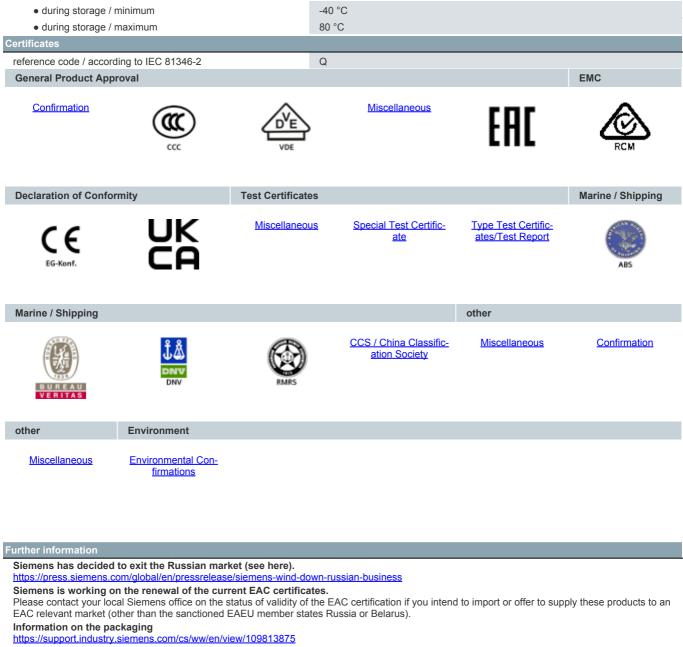

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1140-3EE42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1140-3EE42-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1140-3EE42-0AA0


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications


http://www.siemens.com/specifications

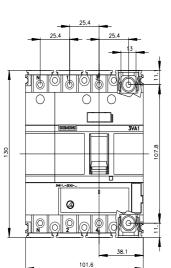

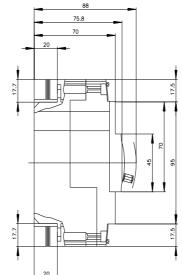

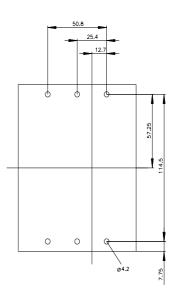

 12.7

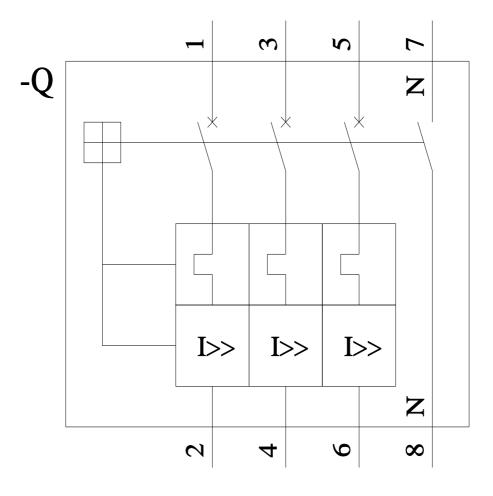

8/10/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3VA11403EE420AA0