SIEMENS

Data sheet


3VA1140-4GF42-0AA0



circuit breaker 3VA1 IEC frame 160 breaking capacity class S Icu=36kA @ 415V 4-pole, line protection TM240, ATAM, In=40A overload protection Ir=28A...40A short-circuit protection Ii=5...10 x In N conductor protection 100% nut keeper kit

	CENTRON
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM240
protection function of the overcurrent release	U
number of poles	4
eneral technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	600 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	10.8 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
 communication function 	No
 other measurement function 	No
Net Weight	1.216 kg
urrent	
operational current	
● at 40 °C	40 A
● at 45 °C	40 A
● at 50 °C	40 A
● at 55 °C	39 A
● at 60 °C	39 A
● at 65 °C	38 A
● at 70 °C	37 A
witching capacity according to IEC 60947	
switching capacity class of the circuit breaker	S
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	55 kA
• at 415 V	36 kA
• at 440 V	25 kA
• at 500 V	7 kA
	7 kA

• at 240 V	55 kA
• at 415 V	36 kA
• at 440 V	25 kA
• at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
• at 240 V	121 kA
• at 415 V	75.6 kA
• at 440 V	52.5 kA
• at 500 V	11.9 kA
• at 690 V	11.9 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with	
I2t characteristic	
• minimum	28 A
maximum	40 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1 s
• maximum	1 s
adjustable response value setting current (li) / for I-tripping	
• minimum	200 A
• maximum	400 A
adjustable setting current (InN) / for N-tripping	
• minimum	40 A
• maximum	40 A
design of the N-conductor protection	100%
product function / grounding protection	No
Mechanical Design	
product component	
product component undervoltage release 	No
product component undervoltage release voltage trigger 	No
product component • undervoltage release • voltage trigger • trip indicator	No No
product component • undervoltage release • voltage trigger • trip indicator height [in]	No No 5.12 in
product component • undervoltage release • voltage trigger • trip indicator height [in] height	No No 5.12 in 130 mm
product component undervoltage release voltage trigger trip indicator height [in] height width [in] 	No No 5.12 in 130 mm 4 in
product component • undervoltage release • voltage trigger • trip indicator height [in] width [in] width	No No 5.12 in 130 mm 4 in 101.6 mm
product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] 	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth	No No 5.12 in 130 mm 4 in 101.6 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0 Yes
product component	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin 0
product component • undervoltage release • voltage trigger • trip indicator height [in] height width depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin Ves IP40
product component	No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin Ves

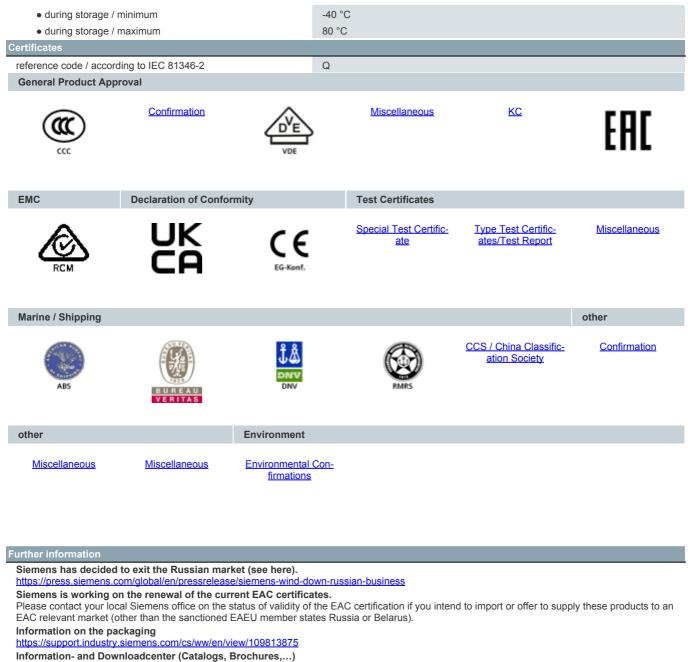

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1140-4GF42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1140-4GF42-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1140-4GF42-0AA0


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications


http://www.siemens.com/specifications

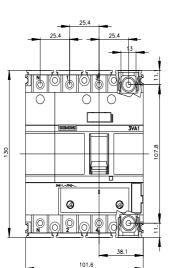

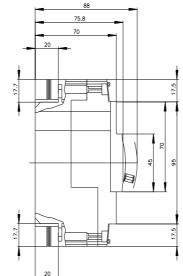

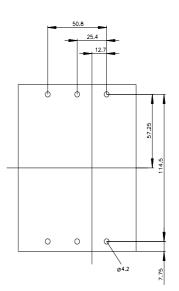

12.7

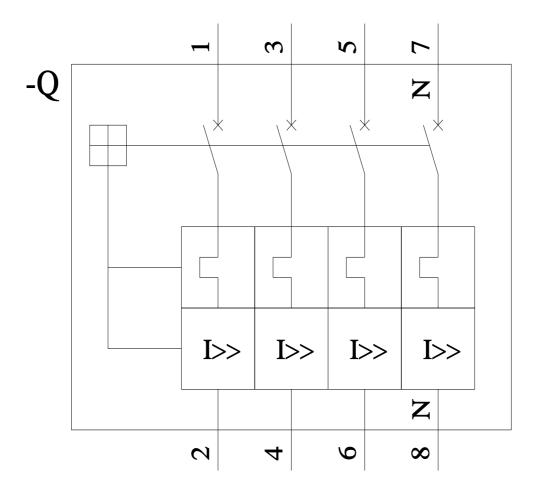

8/10/2023 🖸

Subject to change without notice © Copyright Siemens

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: 3VA11404GF420AA0