## 3VA1150-4EE32-0AA0

**Data sheet** 



circuit breaker 3VA1 IEC frame 160 breaking capacity class S Icu=36kA @ 415V 3-pole, line protection TM220, ATFM, In=50A overload protection Ir=35A...50A short-circuit protection Ii=10 x In nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM220
protection function of the overcurrent release	U
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	500 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	14.6 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	4.87 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
<ul> <li>communication function</li> </ul>	No
<ul> <li>other measurement function</li> </ul>	No
Net Weight	971 g
Current	
operational current	
● at 40 °C	50 A
● at 45 °C	50 A
● at 50 °C	50 A
• at 55 °C	49 A
• at 60 °C	48 A
• at 65 °C	46 A
• at 70 °C	45 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	S
maximum short-circuit current breaking capacity (lcu)	
• at 240 V	55 kA
• at 415 V	36 kA
• at 440 V	25 kA
• at 500 V	7 kA
● at 690 V	7 kA

operating short-circuit current breaking capacity (lcs)	
• at 240 V	55 kA
• at 415 V	36 kA
● at 440 V	25 kA
• at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (lcm)	
● at 240 V	121 kA
● at 415 V	75.6 kA
• at 440 V	52.5 kA
• at 500 V	11.9 kA
• at 690 V	11.9 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	35 A
• maximum	50 A
adjustable response value delay time (tr) / for L-tripping / with l2t characteristic	
• minimum	1s
maximum	1s
adjustable response value setting current (li) / for I-tripping	
• minimum	500 A
• maximum	500 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
product function / grounding protection	No
Mechanical Design	
product component	
undervoltage release	No
	No
voltage trigger	No No
<ul><li>voltage trigger</li><li>trip indicator</li></ul>	No
<ul><li>voltage trigger</li><li>trip indicator</li><li>height [in]</li></ul>	
<ul><li>voltage trigger</li><li>trip indicator</li><li>height [in]</li><li>height</li></ul>	No 5.12 in 130 mm
voltage trigger     trip indicator height [in] height width [in]	No 5.12 in
voltage trigger     trip indicator height [in] height width [in] width	No 5.12 in 130 mm 3 in 76.2 mm
voltage trigger     trip indicator height [in] height width [in] width depth [in]	No 5.12 in 130 mm 3 in
voltage trigger  trip indicator height [in] height width [in] width depth [in] depth	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in
voltage trigger  trip indicator height [in] height width [in] width depth [in] depth Connections	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm
voltage trigger     trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm
voltage trigger     trip indicator height [in] height width [in] width depth [in] depth  Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm
voltage trigger     trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends
voltage trigger     trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm
voltage trigger     trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm
voltage trigger  trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver
<ul> <li>voltage trigger</li> <li>trip indicator</li> <li>height [in]</li> <li>height</li> <li>width [in]</li> <li>width</li> <li>depth [in]</li> <li>depth</li> </ul> Connections <ul> <li>arrangement of electrical connectors / for main current circuit</li> <li>type of electrical connection / for main current circuit</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / minimum</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / maximum</li> <li>design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)</li> <li>design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)</li> <li>Auxiliary circuit</li> </ul>	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin
voltage trigger  trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver
<ul> <li>voltage trigger</li> <li>trip indicator</li> <li>height [in]</li> <li>height</li> <li>width [in]</li> <li>width</li> <li>depth [in]</li> <li>depth</li> </ul> Connections <ul> <li>arrangement of electrical connectors / for main current circuit</li> <li>type of electrical connection / for main current circuit</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / minimum</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / maximum</li> <li>design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)</li> <li>design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)</li> </ul> Auxiliary circuit <ul> <li>number of CO contacts / for auxiliary contacts</li> </ul> Accessories	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin
voltage trigger  trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts  Accessories  product extension / optional / motor drive	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin
<ul> <li>voltage trigger</li> <li>trip indicator</li> <li>height [in]</li> <li>height</li> <li>width [in]</li> <li>width</li> <li>depth [in]</li> <li>depth</li> </ul> Connections <ul> <li>arrangement of electrical connectors / for main current circuit</li> <li>type of electrical connection / for main current circuit</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / minimum</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / maximum</li> <li>design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)</li> <li>design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)</li> <li>Auxiliary circuit</li> <li>number of CO contacts / for auxiliary contacts</li> <li>Accessories</li> <li>product extension / optional / motor drive</li> <li>Environmental conditions</li> </ul>	No         5.12 in         130 mm         3 in         76.2 mm         2.76 in         70 mm         Front terminal nut keeper kit on both ends         12 x 1 mm         17 x 6,5 mm         Silver         Tin         0         Yes
<ul> <li>voltage trigger</li> <li>trip indicator</li> <li>height [in]</li> <li>height</li> <li>width [in]</li> <li>width</li> <li>depth [in]</li> <li>depth</li> <li>Connections</li> <li>arrangement of electrical connectors / for main current circuit</li> <li>type of electrical connection / for main current circuit</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / minimum</li> <li>type of connectable conductor cross-sections / for flat-bar terminal connection / maximum</li> <li>design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)</li> <li>design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)</li> <li>Auxiliary circuit</li> <li>number of CO contacts / for auxiliary contacts</li> <li>Accessories</li> <li>product extension / optional / motor drive</li> <li>Environmental conditions</li> <li>protection class IP / on the front</li> </ul>	No 5.12 in 130 mm 3 in 76.2 mm 2.76 in 70 mm  Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin
voltage trigger     trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts  Accessories  product extension / optional / motor drive  Environmental conditions  protection class IP / on the front ambient temperature	No         5.12 in         130 mm         3 in         76.2 mm         2.76 in         70 mm    Front terminal nut keeper kit on both ends 12 x 1 mm  17 x 6,5 mm  Silver  Tin  0  Yes  IP40
voltage trigger     trip indicator  height [in]  height  width [in]  width  depth [in]  depth  Connections  arrangement of electrical connectors / for main current circuit  type of electrical connection / for main current circuit  type of connectable conductor cross-sections / for flat-bar terminal connection / minimum  type of connectable conductor cross-sections / for flat-bar terminal connection / maximum  design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)  design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)  Auxiliary circuit  number of CO contacts / for auxiliary contacts  Accessories  product extension / optional / motor drive  Environmental conditions  protection class IP / on the front	No         5.12 in         130 mm         3 in         76.2 mm         2.76 in         70 mm         Front terminal nut keeper kit on both ends         12 x 1 mm         17 x 6,5 mm         Silver         Tin

• during storage / minimum

-40 °C 80 °C

during storage / maximum

ertificates

reference code / according to IEC 81346-2

Q

## **General Product Approval**

Confirmation





**Miscellaneous** 

<u>KC</u>



**EMC** 

**Declaration of Conformity** 

**Test Certificates** 







**Miscellaneous** 

Type Test Certificates/Test Report

Special Test Certificate

Marine / Shipping







CCS / China Classification Society

**Miscellaneous** 

other

other

Environment

Confirmation

**Miscellaneous** 

Environmental Confirmations

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1150-4EE32-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1150-4EE32-0AA0

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$ 


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3VA1150-4EE32-0AA0


**CAx-Online-Generator** 

http://www.siemens.com/cax


**Tender specifications** 

http://www.siemens.com/specifications

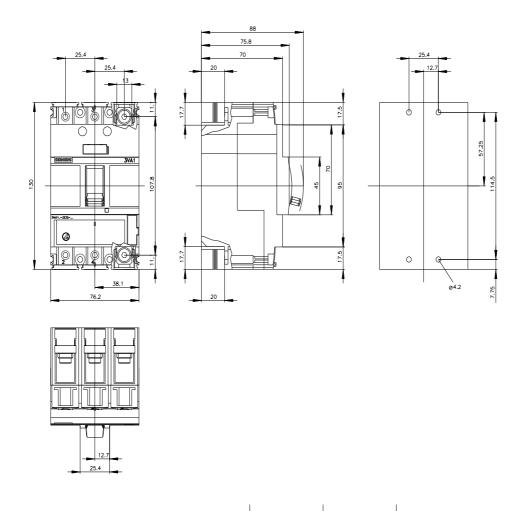

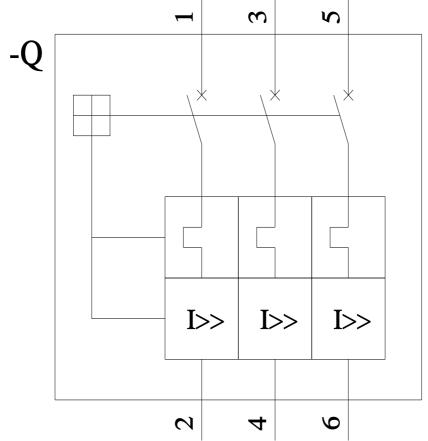

last modified: 8/10/2023 🖸

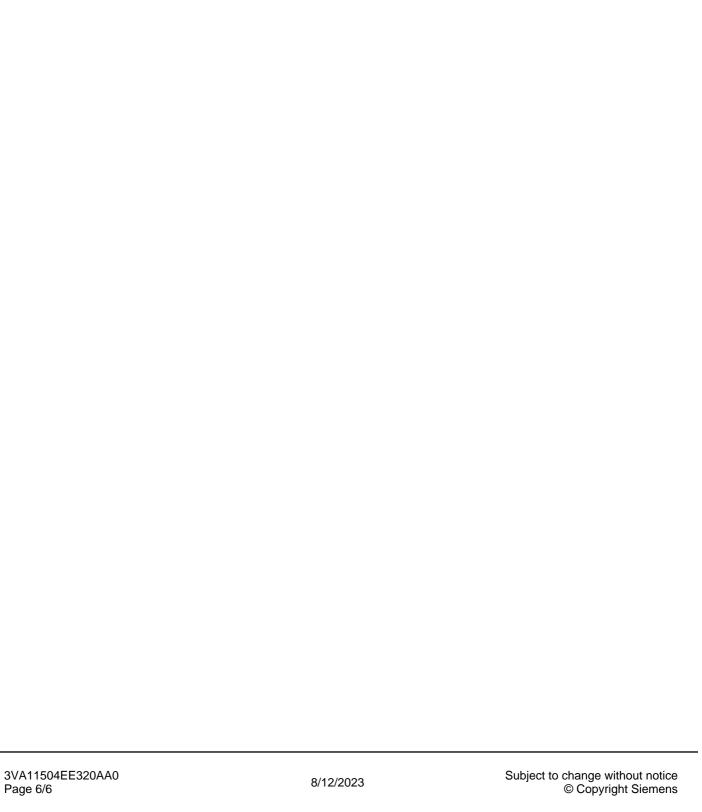

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3VA11504EE320AA0