3VA5250-6ED32-0AA0

Data sheet



circuit breaker 3VA5 UL frame 250 breaking capacity class H 65kA @ 480 V 3-pole, line protection TM210, FTFM, In=50A overload protection Ir=50A fixed short-circuit protection Ii=10 x In nut keeper kit on on both sides

Model	
product brand name	SENTRON
product designation	Molded-case circuit breaker
product designation / according to UL file	HFAS
design of the product	System protection
design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type)	Yes
design of the load switch / according to UL 489 / High-Intensity- Discharge circuit breaker (HID Type)	Yes
design of the load switch / according to UL 489 / Switching Duty circuit breaker (SWD Type)	No
design of the overcurrent release	TM210
protection function of the overcurrent release	Ц
number of poles	3
General technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	750 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	17 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	5.8 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	8 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	4 000
electrical endurance (operating cycles) / at 480 V	8 000
electrical endurance (operating cycles) / at 600 V	4 000
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	without
product function	
• communication function	No
other measurement function	No
Net Weight	2.252 kg
Current	
marking / according to UL 489 / 100%-rated breaker	No
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	Н
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	100 kA
• at 415 V	70 kA
• at 690 V	10 kA
operating short-circuit current breaking capacity (lcs)	

● at 240 V	100 kA
● at 415 V	70 kA
• at 690 V	10 kA
short-circuit current making capacity (Icm)	
• at 240 V	220 kA
● at 415 V	154 kA
• at 690 V	17 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Switching capacity according to UL 489	
current breaking capacity	
• at 240 V	100 kA
● at 480 V	65 kA
● at 600 V	25 kA
Adjustable parameters	
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
• minimum	50 A
• maximum	50 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1s
• maximum	1s
adjustable response value setting current (li) / for I-tripping	
• minimum	500 A
• maximum	500 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
adjustable current response value current / of the current- dependent overload release	50 50 A
product function / grounding protection	No
product function / grounding protection Mechanical Design	No
	No
Mechanical Design	No No
Mechanical Design product component	
Mechanical Design product component • undervoltage release	No
Mechanical Design product component undervoltage release voltage trigger trip indicator	No No
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in]	No No No
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height	No No No 7.28 in
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in]	No No No 7.28 in 185 mm
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in]	No No No 7.28 in 185 mm 4.13 in
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in]	No No No 7.28 in 185 mm 4.13 in
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm
Mechanical Design product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of connectable conductor cross-sections / for flat-bar	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connectable conductor cross-sections / for flat-bar	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the bottom of the	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
mechanical Design product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
product component	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
product component	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
product component	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver
product component	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver 0 Yes IP40 -25 °C
product component	No No No 7.28 in 185 mm 4.13 in 105 mm 3.27 in 83 mm Front connection nut keeper kit on both ends 13 x 1 mm 25 x 8 mm silver

• during storage / maximum
 80 °C

ertificates

reference code / according to IEC 81346-2

Q

General Product Approval

Confirmation







Miscellaneous



EMC Declaration of Conformity

Marine / Shipping

other









Confirmation

Miscellaneous

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5250-6ED32-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA5250-6ED32-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5250-6ED32-0AA0


CAx-Online-Generator


http://www.siemens.com/car


Tender specifications


http://www.siemens.com/specifications

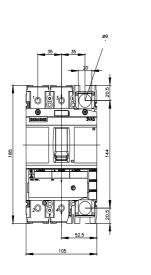


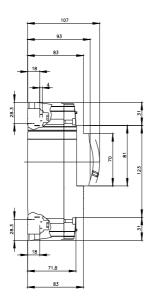





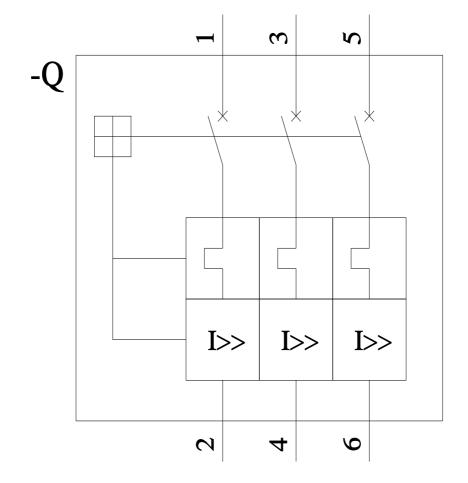

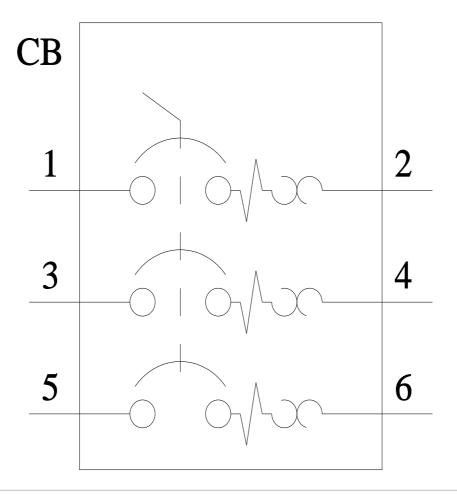

last modified: 7/15/2022 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3VA52506ED320AA0