

Particulate Filter 5P71, P95

Issue Date 09/07/07

The 3M™ Particulate Filter 5P71, P95 offers simplicity and ease of use while helping to provide reliable worker protection against certain oil and non-oil containing aerosols. It passes NIOSH testing criteria providing a minimum filter efficiency of 95%.*

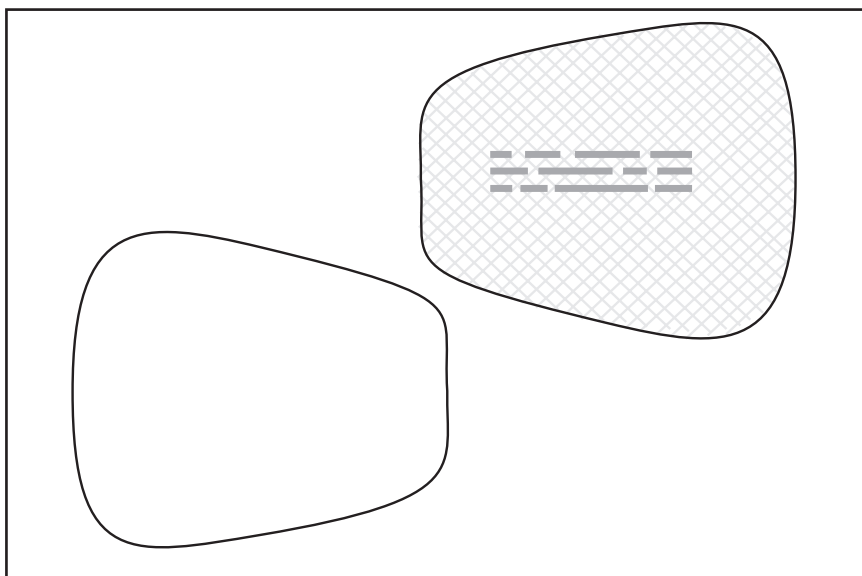
Meets NIOSH 42 CFR 84 P95 requirements*

P-series filter features Advanced Electret Media (AEM), appropriate for both oil and non-oil containing environments with extended time-use limitations.

Comfort and versatility

- Advanced electrostatically charged microfibers allow for a low-profile design and easier breathing filter.
- The 5P71 filters are for use on 3M™ 5000 Series Respirators and 6000 Series Cartridges with 501 Filter Retainers.

*Tested against particles approximately 0.3 micron in size (mass median aerodynamic diameter) per 42CFR84.



3M™ Particulate Filter 5P71, P95

Suggested Applications



- Spray painting
- Lacquering



- Petrochemical manufacturing
- Chemical manufacturing
- Paper processing
- Boat manufacturing
- Lab settings



- Pesticide spraying
- Agriculture



⚠ WARNING

These filters help reduce exposure to certain airborne contaminants. Misuse may result in sickness or death. Before use, the wearer must read and understand *User Instructions* provided as a part of product packaging. Time use limitations may apply. For proper use see supervisor, respirator packaging, or call 3M OH&ESD Technical Service: 1-800-243-4630. In Canada, call 1-800-267-4414.

Filters Per Box	Filters Per Case
10	100

Use For:

Oil and non-oil based particles including paint sprays and pesticides (with appropriate gas and vapor cartridges).

Do Not Use For:

Gases, asbestos or sandblasting. Organic vapors, including those present in paint spraying operations, when concentrations exceed the OSHA PEL, or applicable government regulations whichever is lower. This respirator does not supply oxygen.




Fit Testing

Before use of this respirator, a written respirator protection program must be implemented meeting all the requirements of OSHA 20 CFR 1910.134 such as training and fit testing.

Time Use Limitation

If filter becomes damaged, soiled, or breathing becomes difficult, leave the contaminated area immediately and replace the filter. If used in environments containing only oil aerosols, dispose of filter after 40 hours of use or 30 days, whichever is first.

Product Features

		
Advanced Electret Media Advanced electrostatically charged microfibers make breathing easier and cooler.	Cake-resistant filter media Specially designed filter layers provide longer respirator life and easier breathing.	P-series filter Featuring Advanced Electret Media, appropriate for prolonged use in both oil- and non-oil-containing environments.
✓	✓	✓

For more information, please contact:

3M Occupational Health and Environmental Safety Division (OH&ESD)

In the U.S., contact:

Sales Assistance

1-800-896-4223

Technical Assistance

1-800-243-4630

Fax On Demand

1-800-646-1655

Website

<http://www.3M.com/OccSafety>

For other 3M products

1-800-3M HELPS

In Canada, contact:

3M Canada Company, OH&ESD
P.O. Box 5757

London, Ontario N6A 4T1

Sales Assistance

1-800-265-1840, ext. 6137

Technical Assistance (Canada only)

1-800-267-4414

Fax On Demand

1-800-646-1655

Website

<http://www.3M.com/CA/OccSafety>

Technical Assistance In Mexico

01-800-712-0646

5270-2255, 5270-2119 (Mexico City only)

Technical Assistance In Brazil

0800-132333

Fax On Demand O.U.S. Locations

1-651-732-6530

3M General Offices

3M Center

St. Paul, MN 55144-1000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[3M:](#)
[7000002054](#)