SIEMENS

Data sheet

US2:LCE02C108208A



Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 1 N.C. / 8 N.O. poles, 200-208V 60Hz coil, Non-combination type, Enclosure NEMA type 12, Dust/drip proof for indoors

weight [lb]19 lbHeight x Width x Depth [in]16 × 13 × 6 intouch protection against electrical shockNA for enclosed productsinstallation altitude [ft] at height above sea level maximum6560 ftambient temperature [°F]-22 +149 °F• during storage-22 +149 °F• during operation-13 +104 °Fambient temperature-30 +65 °C• during operation-25 +40 °Ccountry of originUSA	product brand name	Class LC
Detween NO and NC Concrol technical data weight [1b] 19 lb Height x Widh x Depth [in] 16 x 13 x 6 in touch protection against electrical shock NA for enclosed products installation atlitude [11 at height above sea level maximum 6560 ft ambient temperature ['F] - • during storage -22 +149 'F • during operation -13 +164 'F ambient temperature - • during operation -25 +40 'C country of orgin USA Contactor 30 Amp number of NC contacts for main contacts 8 number of NC contacts for main contacts 1 operating voltage for main contacts 100000 red value 20A @2277V 1p 1ph red value 20A @247V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @247V 1p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @247V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @247V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @247V 1p 1ph • at tungsten (2 poles p	design of the product	Electrically held lighting contactor (convertible to mechanically held)
weight [b] 19 lb Height x Width x Depth [in] 16 x 13 x 6 in touch protection against electrical shock NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature ['F] - • during storage -22 +149 'F • during operation -33 +104 'F ambient temperature - • during operation -25 +40 'C • during operation -25 +40 'C • during operation -25 +40 'C • country of origin USA Contactor 30 Amp number of NC contacts for main contacts 1 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 100000 • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @430V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @430V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @430V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at tungsten (2 poles per 1 phase) rated value <td< td=""><td>special product feature</td><td></td></td<>	special product feature	
Height xWith x Depth [in]16 x 13 x 6 intouch protection against electrical shockNA for enclosed productsinstallation altitude [ft] at height above sea level maximum6660 ftambient temperature [F]-• during storage-22 +149 °F• during storage-33 +104 °F• during storage-30 +65 °C• during operation-30 +65 °C• during operation-25 +40 °C• during operation-26 +40 °C• during of main contacts1operating voltage for main current circuit at AC at 60 Hz600 Vmaximum-27 +40 °C• typical-20 +40 °C• turingsten (1	General technical data	
Louch protection against electrical shock NA for enclosed products installation altitude [[1] at height above sea level maximum 6560 ft ambient temperature ['F] - • during storage -22 +149 "F • during operation -13 +104 "F ambient temperature - • during operation -25 +40 "C • during operation -25 +40 "C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 8 number of NC contacts for main contacts 1 operating voltage for main current circuit at AC at 60 Hz 500 V maximum 100000 Type of main contacts of lighting contactor 1 • with electronic ballast [LED driver] (1 pole per 1 phase) 100000 • at tungsten (2 poles per 1 phase) rated value 20A @277V 1p 1ph • at ballast (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 20A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at bablast (2 poles per 1 phase) rated value 30A @600	weight [lb]	19 lb
installation altitude [ft] at height above sea level maximum6560 ftambient temperature [°F] • during storage-22 +149 °F• during storage-30 +65 °C• during storage-30 +65 °C• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactor30 Ampnumber of NC contacts for main contacts8number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz maximum6000 VType of main current circuit at AC at 60 Hz maximum100000Type of main contactsSilver alloy, double breaknumber of NC contacts for lighting contactor100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) r	Height x Width x Depth [in]	16 × 13 × 6 in
ambient temperature [*F]-22 +149 *F• during storage-22 +149 *F• during operation-13 +104 *Fambient temperature-30 +65 *C• during operation-25 +40 *Ccountry of originUSAContactor30 Ampnumber of NO contacts for main contactsnumber of NO contacts for main contacts8number of NO contacts for main contacts1operating voltage for main contacts100000voltage for portage voltage voltage voltage for main contacts100000voltage for main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value<	touch protection against electrical shock	NA for enclosed products
• during storage-22 +149 °F• during operation-13 +104 °Fambient temperature-30 +65 °C• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactornumber of NC contacts for main contacts8number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz600 Vmaximum500 VType of main contacts1ottage for main contacts100000typicalcontact stig of the main contactsvitte globe per 1 phase) rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @247V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value20A @437V 1p 1ph• at tungsten (1 pole per 1 phase) rated value30A @347V 1p 1ph• at tungsten (2 poles per 3 phases) rated value30A @600V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at tungsten (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at tungsten (3 poles per 3 phases) rated value30A @600V 3p 3ph• at tungsten (2 poles per 1 phase) rated value30A @600V 3p 3ph• at tungsten (3 poles per 3 phases) rated value30A	installation altitude [ft] at height above sea level maximum	6560 ft
e. during operation-13 +104 °Fambient temperature-30 +65 °C during storage-30 +65 °C during operationUSAcountry of originUSAContactor30 Ampnumber of NC contacts for main contacts8number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz600 Vmaximum710000Type of main contacts1mechanical service life (operating cycles) of the main contacts100000e at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1phe at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1phe at tungsten (3 poles per 3 phases) rated value30A @600V 2p 1phe at ballast (1 pole per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 3 phases) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 3 phases) rated value30A @600V 2p 1phe at ballast (2 poles per 3 phases) rated value30A @600V 2p 1phe at ballast (3 poles per 3 phases) rated value30A @600V 2p 1phe at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1phe at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1phe at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1phe at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1phe at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1phe at resist	ambient temperature [°F]	
ambient temperature• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactor30 Ampnumber of NO contacts for main contacts8number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz600 Vmaximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase)	• during storage	-22 +149 °F
• during storage-30 +65 °C• during operation-25 +40 °Ccounty of originUSAContactorsize of contactorsize of contactor30 Ampnumber of NC contacts for main contacts8number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz600 Vmaximum7ype of main contactsType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph <t< td=""><td> during operation </td><td>-13 +104 °F</td></t<>	 during operation 	-13 +104 °F
• during operation25 +40 °Ccountry of originUSAContactor30 Ampnumber of NO contacts for main contacts8number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 3 phases) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at tresistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @60	ambient temperature	
country of originUSAContactor30 Ampnumber of NO contacts for main contacts8number of NO contacts for main contacts1operating voltage for main contacts1operating voltage for main contacts1Type of main contacts10000Type of main contactsSilver alloy, double breakmaximum100000Type of main contacts of lighting contactor100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @247V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at taresistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (during storage	-30 +65 °C
Size of contactor 30 Amp number of NO contacts for main contacts 8 number of NC contacts for main contacts 1 operating voltage for main contacts 1 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical 100000 contact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600	 during operation 	-25 +40 °C
size of contactor 30 Amp number of NO contacts for main contacts 8 number of NC contacts for main contacts 1 operating voltage for main current circuit at AC at 60 Hz maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical 100000 contact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at tesistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistiv	country of origin	USA
number of NO contacts for main contacts8number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact10A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0number of NO contacts for auxiliary contac	Contactor	
number of NC contacts for main contacts1operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) 	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @347V 1p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @6	number of NO contacts for main contacts	8
maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor10A @ 120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @ 120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated va	number of NC contacts for main contacts	1
mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contacts0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0		600 V
typicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (3 poles per 3 phases) rated value• at ballast (1 pole per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 3 phases) rated value• at resistive load (2 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (5 poles per 3 phases) rated value• at res	Type of main contacts	Silver alloy, double break
with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 1p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph <tr <tr="">• at resist</tr>		100000
rated valueArt to the total data data data data data data data d	contact rating of the main contacts of lighting contactor	
• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0		10A @120V / 3A @277V 1p 1ph
• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contactnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (1 pole per 1 phase) rated value 	20A @277V 1p 1ph
• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (2 poles per 1 phase) rated value 	20A @480V 2p 1ph
• at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at tungsten (3 poles per 3 phases) rated value 	20A @480V 3p 3ph
 at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value <l< td=""><td> at ballast (1 pole per 1 phase) rated value </td><td>30A @347V 1p 1ph</td></l<>	 at ballast (1 pole per 1 phase) rated value 	30A @347V 1p 1ph
• at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
• at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
	 at resistive load (1 pole per 1 phase) rated value 	30A @600V 1p 1ph
Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
number of NO contacts for auxiliary contacts 0	Auxiliary contact	
	number of NC contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of NO contacts for auxiliary contacts	0
	number of total auxiliary contacts maximum	4

contact rating of auxiliary contacts of contactor according to UL	NA
Coil	
	AC
type of voltage of the control supply voltage	AC
control supply voltage	
at AC at 60 Hz rated value	200 208 V
apparent pick-up power of magnet coil at AC	248 VA
apparent holding power of magnet coil at AC	28 VA
operating range factor control supply voltage rated value of magnet coil	0.85 1.1
Enclosure	
degree of protection NEMA rating of the enclosure	NEMA Type 12
design of the housing	dustproof and drip-proof for indoor use
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf·in] for supply	35 35 lbf·in
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf in
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf·in] at magnet coil	15 15 lbf·in
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	24 kA
● at 480 V	65 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE02C108208A

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C108208A


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LCE02C108208A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C108208A/certificate



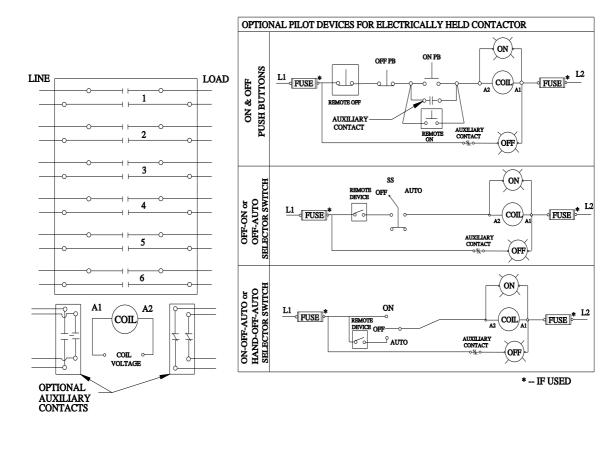

D38297001

last modified:

4/5/2023 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: LCE02C108208A