## SIEMENS

## Data sheet

## US2:LCE04C302120A



Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 3 N.C. / 2 N.O. poles, 115-120V 60Hz/110V 50Hz coil, Noncombination type, Encl NEMA type 4X 304 S-Steel, Water/dust tight noncorrosive

weight [lb]20 lbHeight x Width x Depth [in]16 × 13 × 6 intouch protection against electrical shockNA for enclosed productsinstallation altitude [ft] at height above sea level maximum6560 ftambient temperature [°F]-22 +149 °F• during storage-22 +149 °F• during operation-13 +104 °Fambient temperature-30 +65 °C• during operation-25 +40 °Ccountry of originUSA	product brand name	Class LC
Detween NO and NC           Concrol technical data           weight [1b]         20 lb           Height x Widh x Depth [in]         16 x 13 x 6 in           touch protection against electrical shock         NA for enclosed products           installation atlitude [11 at height above sea level maximum         6560 ft           ambient temperature ['F]         -           • during storage         -22 +149 'F           • during operation         -13 +164 'F           ambient temperature         -           • during operation         -25 +40 'C           country of orgin         USA           Contactor         30 Amp           number of NC contacts for main contacts         2           number of NC contacts for main contacts         3           operating voltage for main contacts         5           routact         5/low of Maximum           routact         100000           valad         100000           reld value         20A @277V 1p 1ph           reld value         20A @247V 1p 1ph<	design of the product	Electrically held lighting contactor (convertible to mechanically held)
weight [b]     20 lb       Height x Width x Depth [in]     16 x 13 x 6 in       touch protection against electrical shock     NA for enclosed products       installation altitude [ft] at height above sea level maximum     6560 ft       ambient temperature ['F]     -       • during storage     -22 +149 'F       • during operation     -33 +104 'F       ambient temperature     -       • during operation     -25 +40 'C       • country of origin     USA       Contactor     30 Amp       number of NC contacts for main contacts     2       number of NC contacts for main contacts     3       operating voltage for main current circuit at AC at 60 Hz     600 V       maximum     100000       • with electronic ballast [LED driver] (1 pole per 1 phase)     10A @120V / 3A @277V 1p 1ph       • at tungsten (2 poles per 1 phase) rated value     20A @480V 2p 1ph       • at tungsten (2 poles per 1 phase) rated value     20A @480V 3p 3ph       • at tungsten (2 poles per 1 phase) rated value     20A @480V 3p 3ph       • at tungsten (2 poles per 1 phase) rated value     20A @480V 3p 3ph       • at tungsten (2 poles per 1 phase) rated value     30A @600V 3p 3ph	special product feature	
Height xWith x Depth [in]16 x 13 x 6 intouch protection against electrical shockNA for enclosed productsinstallation altitude [ft] at height above sea level maximum6660 ftambient temperature [F]-• during storage-22 +149 °F• during storage-33 +104 °F• during storage-30 +65 °C• during operation-30 +65 °C• during operation-25 +40 °C• during operation-26 +40 °C• during operation-27 +40 °C• during operation-26 +40 °C• during operation-26 +40 °C• during operation-26 +40 °C• during operation-26 +40 °C• during operation-27 +40 °C• during of main contacts100 00 V• main contacts100 00 V• typical-27 +40 °C• outlast of nain contacts of lighting contactor100 @120V / 3A @277V 1p 1ph <t< td=""><td>General technical data</td><td></td></t<>	General technical data	
Louch protection against electrical shock         NA for enclosed products           installation altitude [[1] at height above sea level maximum         6560 ft           ambient temperature ['F]         -           • during storage         -22 +149 "F           • during operation         -13 +104 "F           ambient temperature         -           • during operation         -25 +40 "C           • during operation         -25 +40 "C           country of origin         USA           Contactor         30 Amp           number of NC contacts for main contacts         2           number of NC contacts for main contacts         2           operating voltage for main current circuit at AC at 60 Hz         300 V           maximum         600 V           rundber of NC contacts for main contacts         100000           Type of main contacts         100000           vitt alle (operating cycles) of the main contacts         100000           • with electronic ballast [LED driver] (1 pole per 1 phase)         100 & (120V / 3A @277V 1p 1ph           • at tungsten (2 poles per 1 phase) rated value         20A @480V 2p 1ph           • at tungsten (2 poles per 1 phase) rated value         20A @480V 2p 1ph           • at ballast (1 pole per 1 phase) rated value         30A @600V 3p 3ph	weight [lb]	20 lb
installation altitude [ft] at height above sea level maximum6560 ftambient temperature [°F] • during storage-22 +149 °F• during storage-30 +65 °C• during storage-30 +65 °C• during storage-30 +65 °C• during storage-30 +65 °C• during operation25 +40 °Ccountry of originUSAContactor30 Ampnumber of NC contacts for main contacts2number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum6000 VType of main contactsSilver alloy, double breakType of main contactsSilver alloy, double breaktotage to the upser of t	Height x Width x Depth [in]	16 × 13 × 6 in
ambient temperature [*F]-22 +149 *F• during storage-22 +149 *F• during operation-13 +104 *Fambient temperature-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactornumber of NO contacts for main contacts22number of NO contacts for main contacts2number of NO contacts for main contacts3operating voltage for main contacts100000rechancial service life (operating cycles) of the main contacts100000voltage for main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @6000V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rate	touch protection against electrical shock	NA for enclosed products
• during storage-22 +149 °F• during operation-13 +104 °Fambient temperature-30 +65 °C• during storage-30 +65 °C• during operation-25 + 40 °Ccountry of originUSAContactornumber of NC contacts for main contacts2number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz600 Vmaximum600 VType of main contacts100000Type of main contacts of lighting contactor100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 3p 3ph• at ballast (2 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per	installation altitude [ft] at height above sea level maximum	6560 ft
e. during operation-13 +104 °Fambient temperature-30 +65 °C during storage-30 +65 °C during operationUSAcountry of originUSAContactorsize of contacts for main contacts2number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz600 VmaximumSilver alloy, double breakType of main contacts100000contact rating of the main contacts of lighting contactor100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A	ambient temperature [°F]	
ambient temperature• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactor30 Ampnumber of NO contacts for main contacts2number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz600 Vmaximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase)	• during storage	-22 +149 °F
• during storage-30 +65 °C• during operation-25 +40 °Ccounty of originUSAContactorsize of contactorsize of contactor30 Ampnumber of NC contacts for main contacts2number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz600 Vmaximum7ype of main contactsType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph <t< td=""><td><ul> <li>during operation</li> </ul></td><td>-13 +104 °F</td></t<>	<ul> <li>during operation</li> </ul>	-13 +104 °F
• during operation25 +40 °Ccountry of originUSAContactor30 Ampnumber of NO contacts for main contacts2number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 3 phases) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at tresistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @60	ambient temperature	
country of originUSAContactor30 Ampnumber of NO contacts for main contacts2number of NO contacts for main contacts3operating voltage for main contacts3operating voltage for main contacts600 VType of main contactsSilver alloy, double breakType of main contacts100000Type of main contacts of lighting contactor100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at taresistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value <td>during storage</td> <td>-30 +65 °C</td>	during storage	-30 +65 °C
contactor       30 Amp         number of NO contacts for main contacts       2         number of NC contacts for main contacts       3         operating voltage for main contacts       3         operating voltage for main current circuit at AC at 60 Hz       600 V         maximum       600 V         Type of main contacts       Silver alloy, double break         mechanical service life (operating cycles) of the main contacts typical       100000         contact rating of the main contacts of lighting contactor       •         • with electronic ballast [LED driver] (1 pole per 1 phase) rated value       20A @277V 1p 1ph         • at tungsten (2 poles per 1 phase) rated value       20A @480V 2p 1ph         • at tungsten (2 poles per 1 phase) rated value       20A @480V 2p 1ph         • at ballast (1 pole per 1 phase) rated value       30A @600V 2p 1ph         • at ballast (2 poles per 1 phase) rated value       30A @600V 2p 1ph         • at ballast (2 poles per 1 phase) rated value       30A @600V 2p 1ph         • at ballast (2 poles per 1 phase) rated value       30A @600V 2p 1ph         • at resistive load (1 pole per 1 phase) rated value       30A @600V 2p 1ph         • at resistive load (3 poles per 3 phases) rated value       30A @600V 2p 1ph         • at resistive load (3 poles per 3 phases) rated value       30A @600V 3p 3ph	during operation	-25 +40 °C
size of contactor     30 Amp       number of NO contacts for main contacts     2       number of NC contacts for main contacts     3       operating voltage for main current circuit at AC at 60 Hz maximum     600 V       Type of main contacts     Silver alloy, double break       mechanical service life (operating cycles) of the main contacts typical     100000       contact rating of the main contacts of lighting contactor     10A @120V / 3A @277V 1p 1ph       • with electronic ballast [LED driver] (1 pole per 1 phase) rated value     20A @2480V 2p 1ph       • at tungsten (1 pole per 1 phase) rated value     20A @480V 2p 1ph       • at tungsten (2 poles per 1 phase) rated value     20A @480V 2p 1ph       • at ballast (2 poles per 3 phases) rated value     30A @600V 3p 3ph       • at ballast (3 poles per 3 phases) rated value     30A @600V 2p 1ph       • at ballast (2 poles per 1 phase) rated value     30A @600V 2p 1ph       • at tesistive load (2 poles per 1 phase) rated value     30A @600V 2p 1ph       • at resistive load (2 poles per 1 phase) rated value     30A @600V 2p 1ph       • at resistive load (2 poles per 3 phases) rated value     30A @600V 2p 1ph       • at resistive load (3 poles per 3 phases) rated value     30A @600V 2p 1ph       • at resistive load (3 poles per 3 phases) rated value     30A @600V 2p 1ph       • at resistive load (3 poles per 3 phases) rated value     30A @600V 3p 3ph       • at resisti	country of origin	USA
number of NO contacts for main contacts2number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact10A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NC contacts for auxiliary contacts0number of NC contacts for auxiliary contacts0number of NC contacts for auxiliary contacts0	Contactor	
number of NC contacts for main contacts3operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) 	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @347V 1p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @6	number of NO contacts for main contacts	2
maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor10A @ 120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @ 120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated va	number of NC contacts for main contacts	3
mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contacts0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0		600 V
typicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (3 poles per 3 phases) rated value• at ballast (1 pole per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 3 phases) rated value• at resistive load (2 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (5 poles per 3 phases) rated value• at res	Type of main contacts	Silver alloy, double break
with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 1p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph <tr <tr="">• at resist</tr>		100000
rated valueArt to the total data data data data data data data d	contact rating of the main contacts of lighting contactor	
• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0		10A @120V / 3A @277V 1p 1ph
• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contactnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	<ul> <li>at tungsten (1 pole per 1 phase) rated value</li> </ul>	20A @277V 1p 1ph
• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	<ul> <li>at tungsten (2 poles per 1 phase) rated value</li> </ul>	20A @480V 2p 1ph
• at ballast (2 poles per 1 phase) rated value       30A @600V 2p 1ph         • at ballast (3 poles per 3 phases) rated value       30A @600V 3p 3ph         • at resistive load (1 pole per 1 phase) rated value       30A @600V 1p 1ph         • at resistive load (2 poles per 1 phase) rated value       30A @600V 2p 1ph         • at resistive load (2 poles per 1 phase) rated value       30A @600V 2p 1ph         • at resistive load (3 poles per 3 phases) rated value       30A @600V 3p 3ph         Auxiliary contact       30A @600V 3p 3ph         number of NC contacts for auxiliary contacts       0         number of NO contacts for auxiliary contacts       0         number of NO contacts for auxiliary contacts       0	<ul> <li>at tungsten (3 poles per 3 phases) rated value</li> </ul>	20A @480V 3p 3ph
<ul> <li>at ballast (3 poles per 3 phases) rated value</li> <li>at resistive load (1 pole per 1 phase) rated value</li> <li>at resistive load (2 poles per 1 phase) rated value</li> <li>at resistive load (2 poles per 1 phase) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <li>at resistive load (3 poles per 3 phases) rated value</li> <l< td=""><td><ul> <li>at ballast (1 pole per 1 phase) rated value</li> </ul></td><td>30A @347V 1p 1ph</td></l<></ul>	<ul> <li>at ballast (1 pole per 1 phase) rated value</li> </ul>	30A @347V 1p 1ph
• at resistive load (1 pole per 1 phase) rated value       30A @600V 1p 1ph         • at resistive load (2 poles per 1 phase) rated value       30A @600V 2p 1ph         • at resistive load (3 poles per 3 phases) rated value       30A @600V 3p 3ph         Auxiliary contact       30A @600V 3p 3ph         number of NC contacts for auxiliary contacts       0         number of NO contacts for auxiliary contacts       0	<ul> <li>at ballast (2 poles per 1 phase) rated value</li> </ul>	30A @600V 2p 1ph
• at resistive load (2 poles per 1 phase) rated value         30A @600V 2p 1ph           • at resistive load (3 poles per 3 phases) rated value         30A @600V 3p 3ph           Auxiliary contact         30A @600V 3p 3ph           number of NC contacts for auxiliary contacts         0           number of NO contacts for auxiliary contacts         0	<ul> <li>at ballast (3 poles per 3 phases) rated value</li> </ul>	30A @600V 3p 3ph
	<ul> <li>at resistive load (1 pole per 1 phase) rated value</li> </ul>	30A @600V 1p 1ph
Auxiliary contact       number of NC contacts for auxiliary contacts     0       number of NO contacts for auxiliary contacts     0	<ul> <li>at resistive load (2 poles per 1 phase) rated value</li> </ul>	30A @600V 2p 1ph
number of NC contacts for auxiliary contacts     0       number of NO contacts for auxiliary contacts     0	<ul> <li>at resistive load (3 poles per 3 phases) rated value</li> </ul>	30A @600V 3p 3ph
number of NO contacts for auxiliary contacts 0	Auxiliary contact	
	number of NC contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of NO contacts for auxiliary contacts	0
	number of total auxiliary contacts maximum	4

contact rating of auxiliary contacts of contactor according to UL	NA
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
at AC at 50 Hz rated value	110 V
at AC at 60 Hz rated value	115 120 V
apparent pick-up power of magnet coil at AC	248 VA
apparent holding power of magnet coil at AC	28 VA
operating range factor control supply voltage rated value of magnet coil	0.85 1.1
Enclosure	
degree of protection NEMA rating of the enclosure	NEMA 4x 304 stainless steel enclosure
design of the housing	dustproof, waterproof & resistant to corrosion
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf-in] for supply	35 35 lbf·in
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf-in] for load-side outgoing feeder	35 35 lbf·in
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf·in] at magnet coil	15 15 lbf·in
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (lcu)	
• at 240 V	24 kA
• at 480 V	65 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE04C302120A


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:LCE04C302120A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=US2:LCE04C302120A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE04C302120A/certificate

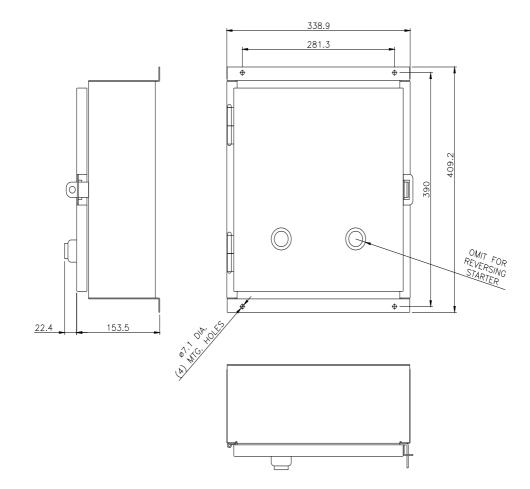

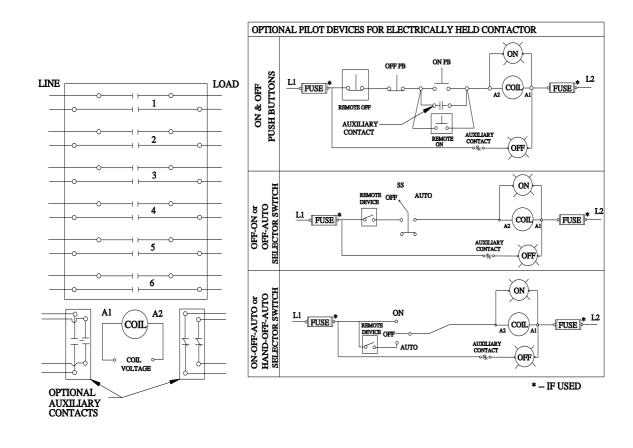

D38297001

last modified:

4/5/2023 🖸

Subject to change without notice © Copyright Siemens

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens: LCE04C302120A