


Ratings and Safety Standards

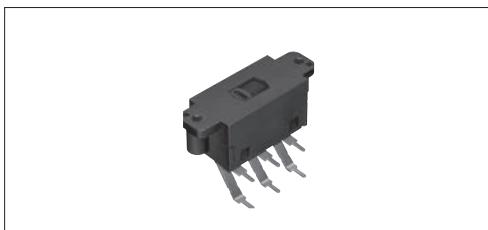

Items	Specifications
C-UL-US	5RA 250V AC
SEMKO	5A 250V~
Ratings satisfying local electrical appliance and material safety law	250V 5A±

Product Line

Circuit arrangement	Travel (mm)	Operating force	Mounting method	Terminal configuration	Turn stopper	Marking variety	Minimum order unit (pcs.)		Product No.	Drawing No.
							Japan	Export		
DPDT	6	10 ± 1.0 N	Self-tap (for M2.6)	Right angle	Without	Without marking	100	1,000	SDKPA40100	1
			With		SDKPA40200				2	
			Self-tap (for M3)		Without				SDKPA40300	1
					With				SDKPA40400	2

Packing Specifications

Tray


Number of packages (pcs.)		Export package measurements (mm)
1 case / Japan	1 case / export packing	
100	1,000	555×381×267









Dimensions

No.	Style	PC board mounting hole dimensions (Viewed from the direction A)
1		
2		

Circuit Diagram

(Viewed from Direction A)



Type		Rocker		Slide		Rotary				
Series		SDDJF1A		SDKP		SDKZ		SDDE		
Photo										
Rating		8A / 128A 250V~ 10 (6) / 250~		5RA 250V AC		PS: 16 (6) A 250V AC 14 (6) A 250V AC		AC Switch: 1A / 16A 250V ~ DC Switch: 20mA 12V DC		
						DC: 0.1A 12V DC		Encoders: 0.1A 12V DC		
Operating life		10,000cycles		100cycles		10,000cycles (Power) 30,000cycles (Encoder)		AC Switch: 10,000 cycles DC Switch: 10,000 cycles		
		10A 250V AC		Without load		16A 250V AC (Power) 0.1A 12V DC (Encoder)		Encoder 30,000 cycles		
Travel (mm)		4.6		6		Endless		Push Switches: 1.85mm Encoders: 360° (360° Rotation)		
Features		—		—		With Encoders circuit		AC Switch, DC Switch, With Encoder		
Operating temperature range		-10℃ to +55℃		-10℃ to +60℃		-10℃ to +70℃		0℃ to +85℃		
Automotive use		—		—		—		—		
Life cycle (availability)										
Electrical performance		Contact resistance		100mΩ max.		100mΩ max. (Power)		AC Switch: 100mΩ max. DC Switch: 500mΩ max. Encoder: 1Ω max.		
						1Ω max. (Encoder)				
		Insulation resistance		500MΩ min. 500V DC		500MΩ min. 500V DC (Power)		AC Switch: 100MΩ min. 500V DC DC Switch: 100MΩ min. 100V DC Encoder: 100MΩ min. 100V DC		
						100MΩ min. 100V DC (Encoder)				
Voltage proof		2,000V AC for 1minute		2,000V AC for 1minute (Power)		AC Switch: 2,000V AC for 1 minute DC Switch: 100V AC for 1 minute Encoder: 100V AC for 1 minute				
				100V AC for 1minute (Encoder)						
Mechanical performance		Terminal strength		50N for 1minute	10N for 1minute	20N (Power) 5N (Encoder)		AC Switch: 5N for 1 minute DC Switch: 5N for 30s Encoder: 5N for 1 minute		
		Actuator strength		Operating direction	25N	50N	—		100N	
				Perpendicular direction	25N	50N	30N		30N (Retract direction)	
Environmental performance		Cold		-20℃ 96h		-40℃ 240h				
		Dry heat		85℃ 96h		85℃ 240h				
		Damp heat		40℃, 90 to 95%RH 96h		40℃, 90 to 95%RH 240h				
Page		172		173		174		177		

Power Switches Soldering Conditions	178
Power Switches Cautions	178
Power Switches Safety Standard	178

Power Switches Soldering Conditions

Reference for Hand Soldering

Series	Soldering temperature	Soldering time
SDDJE, SDDJF, SDKP, SDDJF1A, SDKZ, SDDE	350±10℃	3+1/0s
SDKR	300±10℃	3±0.5s

Reference for Dip Soldering

(For PC board terminal types and SDDJF right-angle terminal types)

Series	Dip soldering	
	Soldering temperature	Duration of immersion
SDKR, SDDJE, SDDJF, SDKP, SDKZ, SDDE	260±5℃	10±1s

Power Switches Cautions

1. The primary power supply switching is subject to the safety regulations, and the provisions differ by each destination. Consult with us for non-standard use cases.
2. An unstable contact may occur if the switch current is lower than 0.5A. For this case, consult with us.
3. These power switches were produced for alternating current. For direct current, consult with us.
4. Applying load to terminals during soldering under certain conditions may cause deformation and electrical property degradation.
5. Avoid use of water-soluble soldering flux, since it may corrode the switches.
6. When soldering twice, wait until the first soldered portion cools to normal temperature. Continuous heating will deform the external portions, loosen or dislodge terminals, or may deteriorate their electrical characteristics.
7. Before soldering switches with locking mechanism, release the locks. If they are soldered without releasing the locks, the soldering heat may deform the locking mechanism.
8. Be sure to release the locks before removing the knobs. Otherwise, the locking mechanism may be broken.
9. Be sure to use the switch with forced travel positioned as close to the total travel as possible.
10. Tighten the mounting screws by applying the specified torque. Tightening with a larger torque than the specified will result in malfunction or breakage of screws.
11. Corrosive gas if generated by peripheral parts of a set, malfunction such as imperfect contact may occur. Thorough investigation shall be required beforehand.
12. Storage
Store the products as delivered at normal temperature and humidity, out of direct sunlight and away from corrosive gases. Use them as soon as possible and no later than six months after delivery. Once the seal is broken, use them as soon as possible.

Power Switches Safety Standards

1. Safety Standards Outline

Safety standards are established by a country or an organization representing it to protect general users from electrical shock and fire hazards. It establishes standards for electrical devices and components. For electrical equipment manufacturers, utilizing switches that have been safety-approved ensures the safety of the switch. The use of a safety-approved switch also simplifies at least one part of the process of obtaining certification by safety testing.

2. Major Safety Standards

(1) Electrical Appliance and Material Safety Law

The conventional [Electrical Appliance and Material Control Law] has changed to [Electrical Appliance and Material Safety Law] and has been enforced since April 1, 2001. Electrical appliances are categorized into special electric appliances and parts (formerly Class A) and Electrical appliances other than the special electric appliances (formerly Class B). Special electric appliances are required to receive goodness of fit test at a certified test agency and to store the certificate. Also, penal provisions have been reinforced.

(2) UL (Underwriters Laboratories Inc.)

Underwriters Laboratories Inc. (UL) is the American safety approving organization. Its purpose is to ensure consumer safety and protect them from fire hazards. State law requires that equipment to be exported to the United States utilize UL approved power switches or power switches meeting UL standards and capable of passing UL tests.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alps Alpine:

[SDKPA40100](#) [SDKPA40200](#) [SDKPA40400](#) [SDKPA40300](#)