

## SNAP REED RELAY MODULES

### Features

- > Four channels per module
- > Convenient pluggable wiring terminals; accepts up to 14 AWG wire
- > Powered by a single 5-volt supply
- > Channel-specific LEDs
- > Operating temperature: -20 to 70 °C



SNAP ODC5R

### DESCRIPTION

The SNAP Reed Relay modules use reed relays and do not provide optical isolation. Current rating depends on the voltage the module is used with.

Typical applications for these modules include analog signal and communication line multiplexing.

Because of their low 10 VA rating, these modules are not recommended for inductive or capacitive loads (even very small loads), because the inrush current is likely to exceed the 10 VA rating.

**IMPORTANT:** Applications using 120 VAC are typically NOT suited to this module. If you are considering using this module for any application other than low-voltage purely resistive loads, see the detailed notes and rating curve on the following pages, and call Pre-sales Engineering for specific guidance.

*NOTE: For many applications a better choice is the SNAP-OMR6-C module, which can handle a full 6 A at 0–250 VAC or 0–30 VDC.*

Part of the SNAP PAC System, these modules mount on a SNAP PAC rack with a SNAP PAC brain or rack-mounted controller. Analog, digital, and serial I/O modules can all be on the same rack. Such an I/O unit is also well suited for PC-based control or for use as intelligent remote I/O for an Allen-Bradley MicroLogix™ or other RSLogix™-based PLC system, such as ControlLogix™ or CompactLogix™.

For easier, faster wiring, see SNAP TEX cables and breakout boards.

### I/O Processor Compatibility

SNAP digital output modules are compatible with all SNAP PAC controllers and SNAP PAC brains.

**Notes for legacy hardware:** SNAP digital output modules are also compatible with SNAP Ultimate, SNAP Ethernet, and SNAP Simple brains, as well as other SNAP brains such as the serial B3000 and the B3000HA. These modules can also be used on B-series and M-series mounting racks.

### Part Numbers

Part	Description
SNAP-ODC5R <sup>a</sup>	SNAP 4-channel dry contact output, normally open
SNAP-ODC5R5 <sup>a</sup>	SNAP 4-channel dry contact output, normally closed


a. Not UL approved.

## INSTALLATION

The following diagram shows part of a SNAP mounting rack. The rack is shown without screw connectors.

Modules snap securely into place in the row of connectors on the rack. Each module connector has a number. Digital output modules and other types of SNAP I/O modules are mounted on the module connectors starting at module position zero.

**NOTE:** Check the data sheet or user's guide for the brain or on-the-rack controller you are using to determine module features available and any restrictions on module placement.

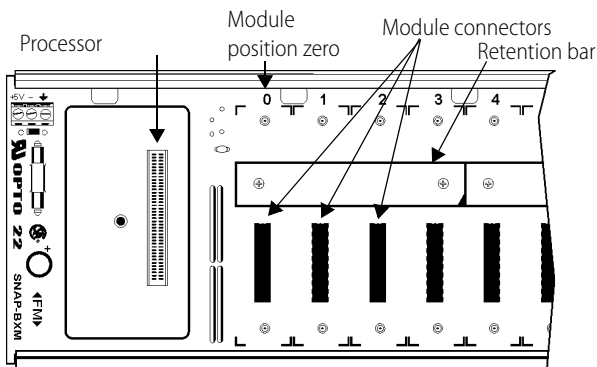

1. Place the rack so that the module connector numbers are right-side up, with zero on the left, as shown in the diagram above. (If your rack has screw connectors, the screw connectors will be at the bottom.)
2. Position the module over the module connector, aligning the small slot at the base of the module with the retention bar on the rack. When positioning modules next to each other, be sure to align the male and female module keys at the tops of the modules before snapping a module into position.
3. With the module correctly aligned, push on the module to snap it into place.
4. Use standard 4-40 x 1/2 truss-head Phillips hold-down screws to secure both sides of each module.  
**CAUTION:** Do not over-tighten screws. See Specifications.
5. Follow the wiring diagram on [page 4](#) to attach modules to the devices they monitor.

Modules require a special tool (provided) for removal.

## SPECIFICATIONS

	SNAP-ODC5R	SNAP-ODC5R5
Key Feature	Dry contact Normally open	Dry contact Normally closed
Torque, hold-down screws	Not to exceed 1 in-lb (0.11 N-m)	Not to exceed 1 in-lb (0.11 N-m)
Torque, connector screws	5.22 in-lb (0.59 N-m)	5.22 in-lb (0.59 N-m)
<b>Field Side Ratings (each channel)</b>		
Line Voltage - Range	0–100 VDC 0–130 VAC*	0–100 VDC 0–130 VAC*
Line Voltage - Nominal	--	--
Current Rating	0.5 amps switching*	0.5 amps switching*
Surge Current	0.5 amps*	0.5 amps*
Minimum Load	0 mA	0 mA
Output Voltage Drop	0 volts	0 volts
Off-state Leakage	0 mA	0 mA
Peak Blocking Voltage	100 VDC / 130 VAC	100 VDC / 130 VAC
Fuse (Common to all Channels)	Has four isolated channels. User must provide own fusing.	Has four isolated channels. User must provide own fusing.
Channel-to-channel isolation	300 VAC (1500 V transient)	300 VAC (1500 V transient)
<b>Logic Side Ratings</b>		
Pickup Voltage	4 V @ 5.5 mA	4 V @ 5.5 mA
Dropout Voltage	1 VDC	1 VDC
Control Resistance	220 ohms	220 ohms
Logic Supply Voltage	5 VDC ± 0.25 VDC	5 VDC ± 0.25 VDC
Logic Supply Current	50 mA maximum	50 mA maximum
<b>Module Ratings</b>		
Number of Channels Per Module	4	4
Turn-on Time	500 usec	500 usec
Turn-off Time	500 usec	500 usec
Isolation (Field Side to Logic Side)	1,500 volts (transient)	1,500 volts (transient)
Mechanical Life	200,000,000 cycles	200,000,000 cycles
Temperature	-20 to 70 °C, operating -30 to 85 °C, storage	-20 to 70 °C, operating -30 to 85 °C, storage
Agency Approvals	CE, CSA, RoHS, DFARS; UKCA	CE, RoHS, DFARS; UKCA
Warranty	30 months or mechanical life, whichever comes first	30 months or mechanical life, whichever comes first


\* The current of the dry contact module must not exceed 10 VA power limit under steady state or momentary in-rush conditions. For voltages at or below 20 volts, the current limit is 0.5 amps. For voltages above 20 volts, the maximum allowable current is determined by the following equation: Current Maximum = 10 VA / Voltage.

SCHEMATIC


Current Limit at Key Voltages	
VDC	mA
5	500
12	500
24	416
48	206
100 <sup>1</sup>	100

<sup>1</sup> Maximum DC voltage is 100 VDC.

Current Limit

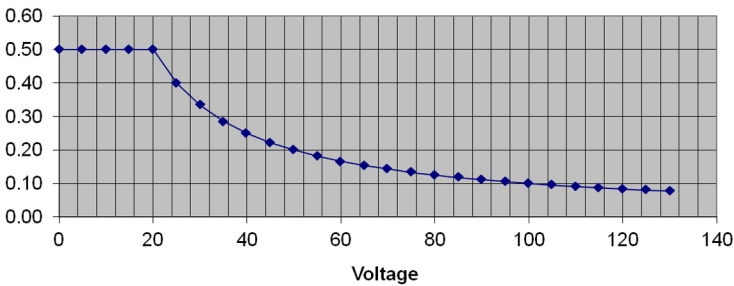


TYPICAL WIRING EXAMPLES

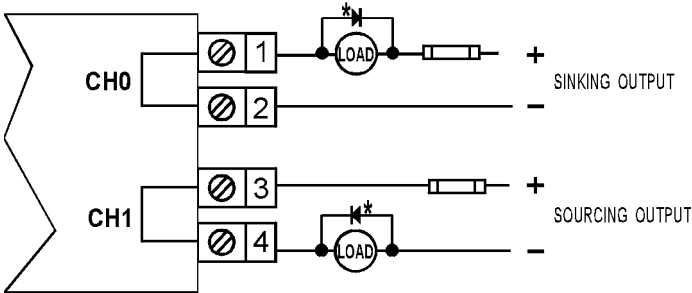


NOTE: \* Commutating diode\* must be used on inductive loads (Typical: 1N4005).

FIELD WIRING DRY CONTACT OUTPUT

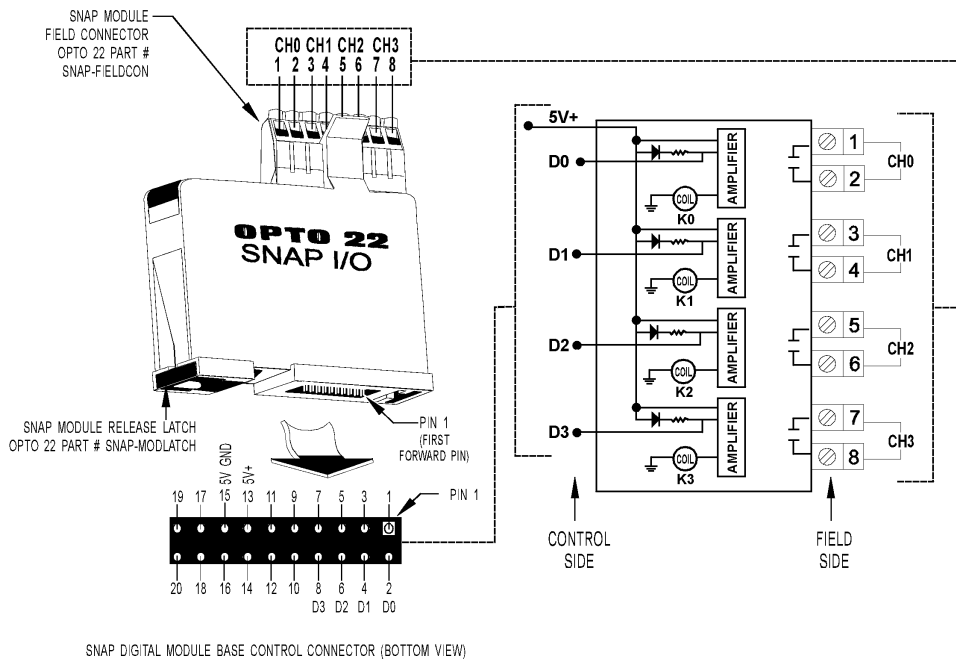


## DIMENSIONAL DRAWING

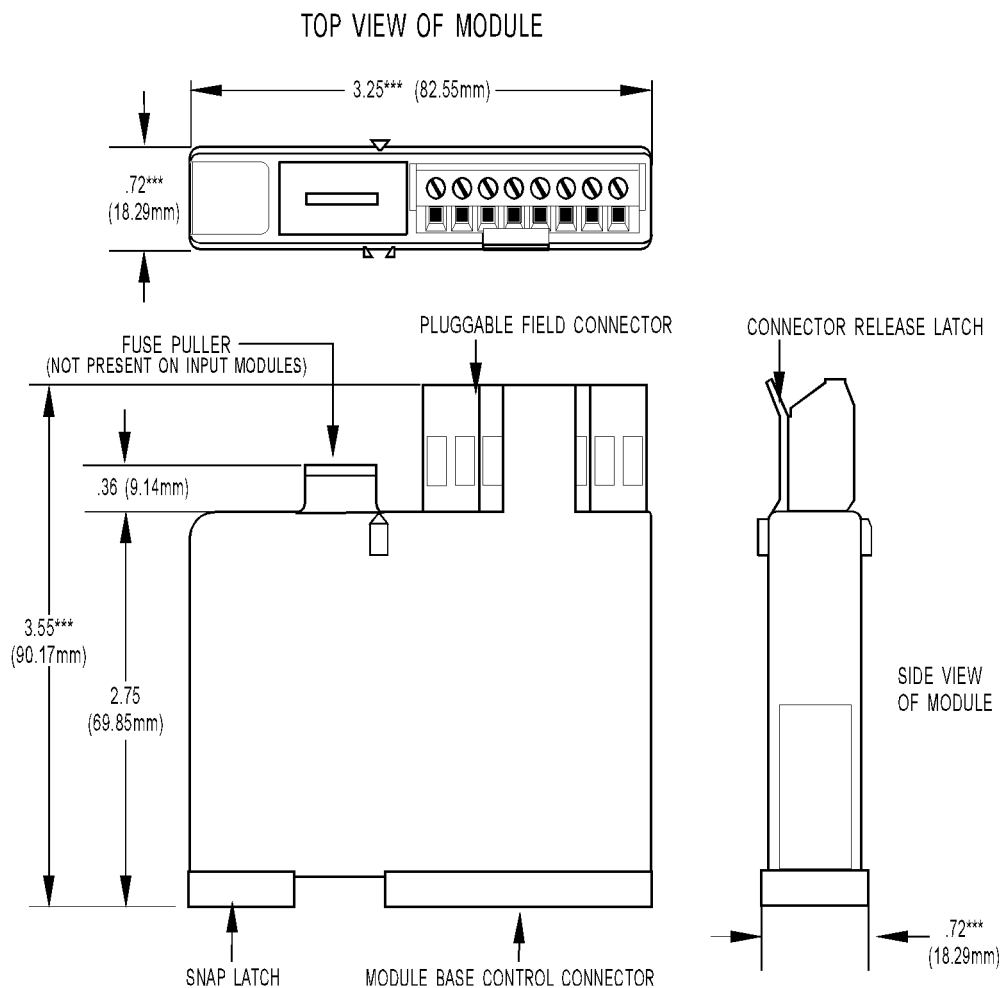

### TOLERANCES LEGEND

\* +/- .010"      \*\* +/- .020"  
\*\*\* +/- .030"      \*\*\*\* +/- .060"  
NO \* REFERENCE ONLY


## DIMENSIONAL DRAWING

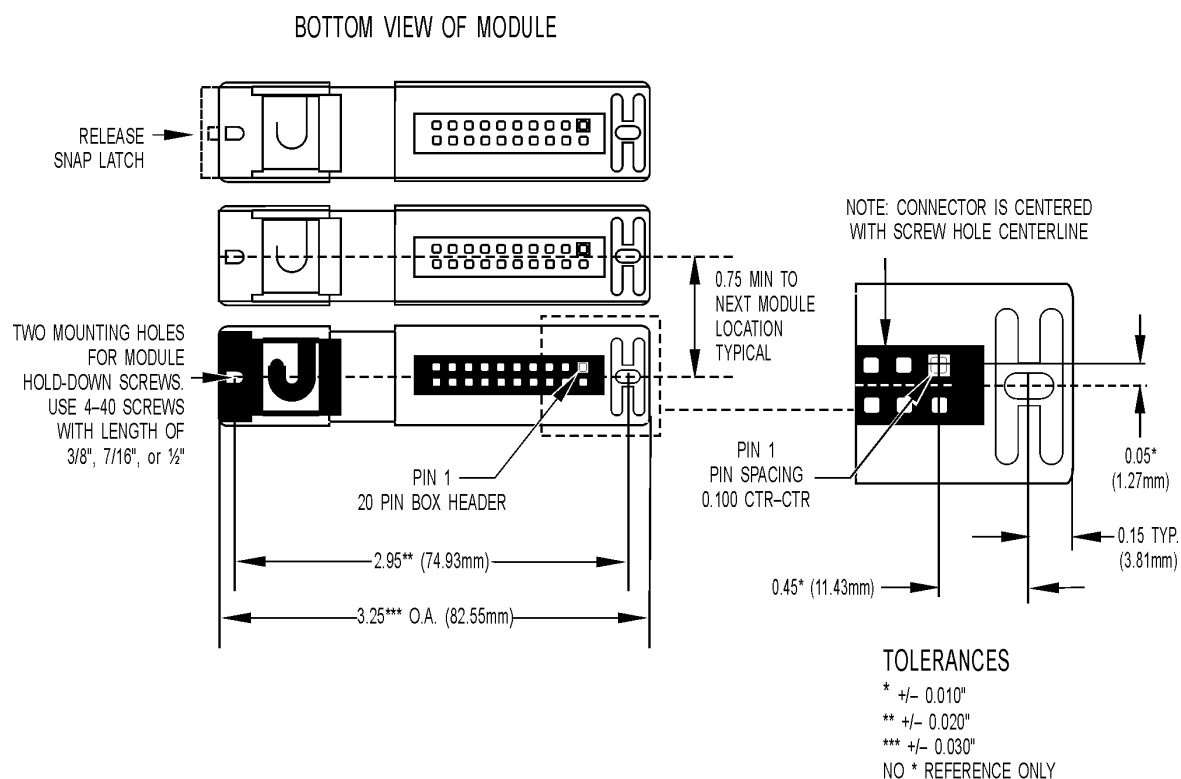

**IMPORTANT:** The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

## DIMENSIONAL DRAWING

### SNAP Digital Module Mounted on SNAP Rack

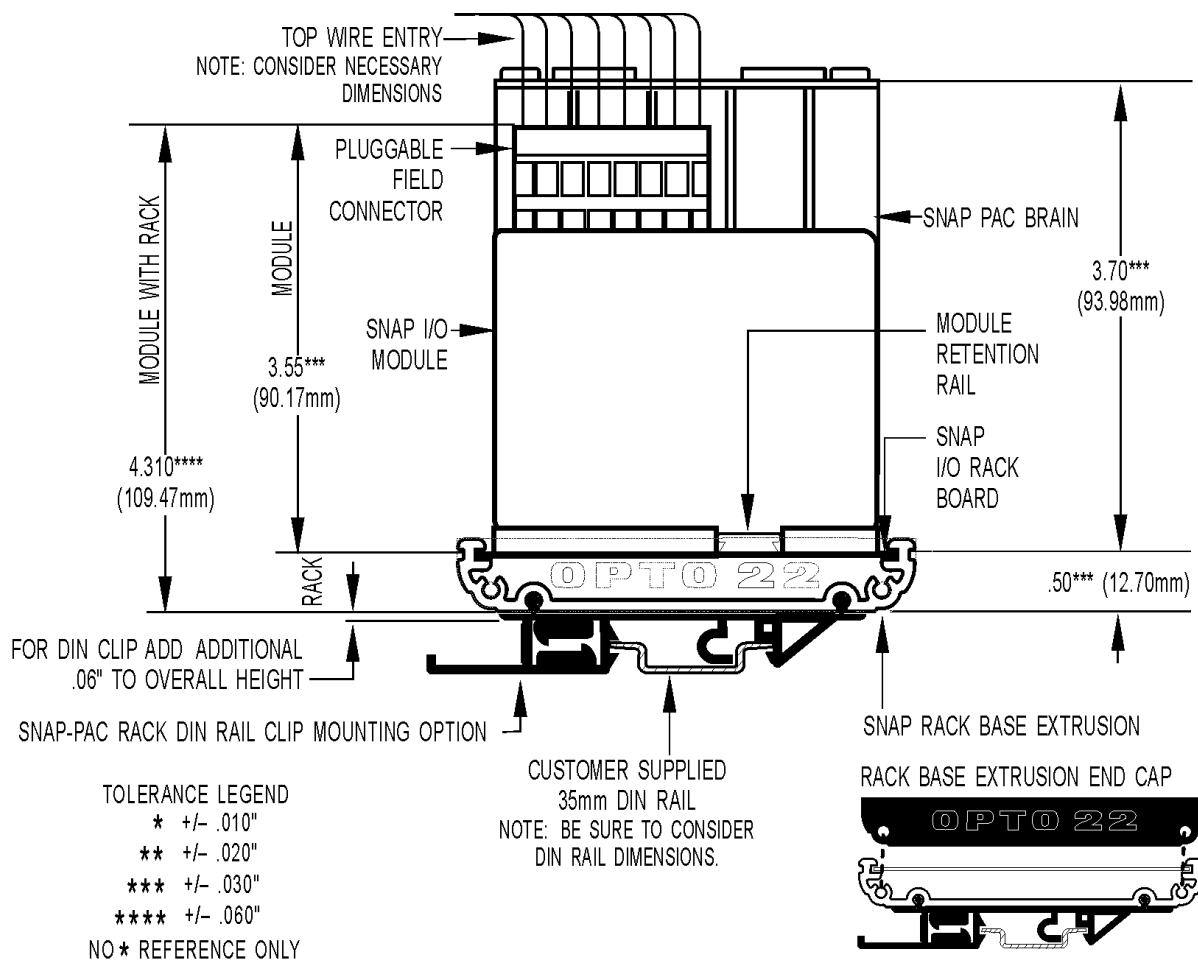

## PRODUCTS

Opto 22 develops and manufactures reliable, easy-to-use, open standards-based hardware and software products. Industrial automation, process control, remote monitoring, data acquisition, and industrial internet of things (IIoT) applications worldwide all rely on Opto 22.

### groov RIO®

[groov RIO edge I/O](#) offers a single, compact, PoE-powered industrial package with web-based configuration and IIoT software built in, support for multiple OT and IT protocols, and security features like a device firewall, data encryption, and user account control.

Standing alone, *groov* RIO connects to sensors, equipment, and legacy systems, collecting and securely publishing data from field to cloud. Choose a universal I/O model with thousands of possible field I/O configurations, with or without Ignition from Inductive Automation®, or a [RIO EMU energy monitoring unit](#) that reports 64 energy data values from 3-phase loads up to 600 VAC, Delta or Wye.

You can even write an IEC 61131-3 compliant control program to run on *groov* RIO, using CODESYS. You can also use *groov* RIO with a Modbus/TCP master or as remote I/O for a *groov* EPIC system.

### groov EPIC® System

Opto 22's [groov Edge Programmable Industrial Controller \(EPIC\)](#) system gives you industrially hardened control with a flexible Linux®-based processor with gateway functions, guaranteed-for-life I/O, and software for your automation and IIoT applications.

#### groov EPIC Processor

The heart of the system is the *groov* EPIC processor. It handles a wide range of digital, analog, and serial functions for data collection, remote monitoring, process control, and discrete and hybrid manufacturing.

In addition, the EPIC provides secure data communications among physical assets, control systems, software applications, and online services, both on premises and in the cloud. No industrial PC needed.

Configuring and troubleshooting I/O and networking is easier with the EPIC's integrated high-resolution color touchscreen. Authorized users can manage the system locally on the touchscreen, on a monitor connected via the HDMI or USB ports, or on a PC or mobile device with a web browser.

#### groov EPIC I/O

*groov* I/O connects locally to sensors and equipment. Modules have a spring-clamp terminal strip, integrated wireway, swing-away cover, and LEDs indicating module health and discrete channel status. *groov* I/O is hot swappable, UL Hazardous Locations approved, and ATEX compliant.

### groov EPIC Software

The *groov* EPIC processor comes ready to run the software you need:

- Programming: Choose flowchart-based PAC Control, CODESYS Development System for IEC61131-3 compliant programs, or secure shell access (SSH) to the Linux OS for custom applications
- Node-RED for creating simple IIoT logic flows from pre-built nodes
- Efficient MQTT data communications with string or Sparkplug data formats
- Multiple OPC UA server options
- HMI: *groov* View to build your own HMI viewable on touchscreen, PCs, and mobile devices; PAC Display for a

Windows HMI; Node-RED dashboard UI

- Ignition or Ignition Edge® from Inductive Automation (requires license purchase) with OPC-UA drivers to Allen-Bradley®, Siemens®, and other control systems, and MQTT communications

### Older products

From solid state relays, to world-famous G4 and SNAP I/O, to SNAP PAC controllers, older Opto 22 products are still supported and working hard at thousands of installations worldwide. You can count on us for the reliability and service you expect, now and in the future.

## QUALITY

Founded in 1974, Opto 22 has established a worldwide reputation for high-quality products. All are made in the U.S.A. at our manufacturing facility in Temecula, California.

Because we test each product twice before it leaves our factory rather than testing a sample of each batch, we can afford to guarantee most solid-state relays and optically isolated I/O modules for life.

## FREE PRODUCT SUPPORT

Opto 22's California-based Product Support Group offers free technical support for Opto 22 products from engineers with decades of training and experience. Support is available in English and Spanish by phone or email, Monday–Friday, 7 a.m. to 5 p.m. PST.

Support is always available on our website, including [free online training](#) at OptoU, how-to [videos](#), [user's guides](#), the Opto 22 KnowledgeBase, and [OptoForums](#).

## PURCHASING OPTO 22 PRODUCTS

Opto 22 products are sold directly and through a worldwide network of distributors, partners, and system integrators. For more information, contact Opto 22 headquarters at **800-321-6786** (toll-free in the U.S. and Canada) or **+1-951-695-3000**, or visit our website at [www.opto22.com](http://www.opto22.com).





# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Opto 22:](#)

[SNAP-ODC5R](#) [SNAP-ODC5R5](#)